


# RUGGED HIGH-SPEED STRIPS

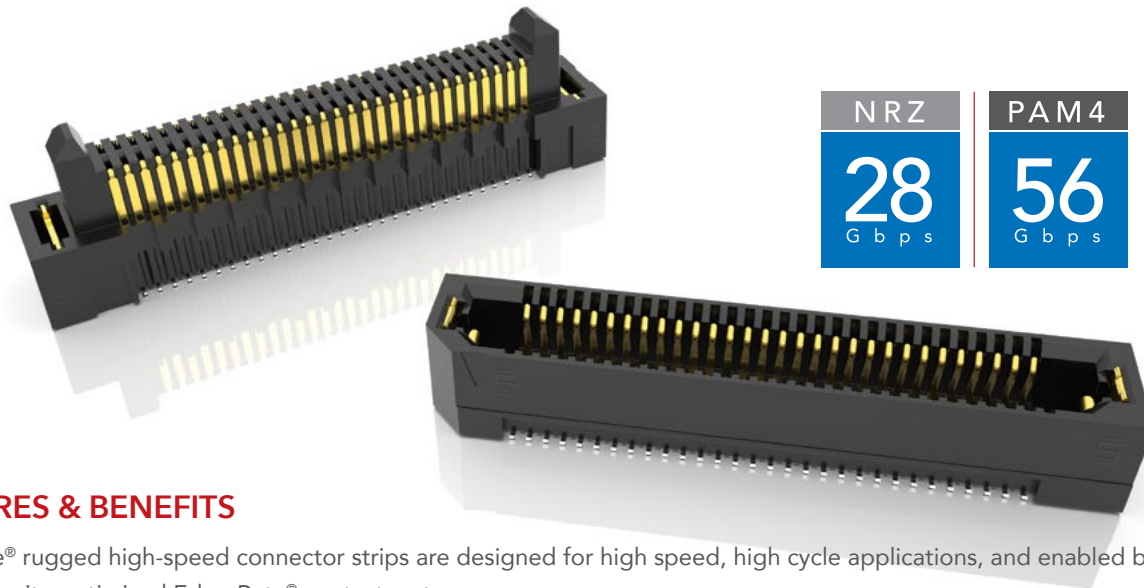


NRZ	PAM4
28 Gbps	56 Gbps



## FEATURES & BENEFITS

Edge Rate® rugged high-speed connector strips are designed for high speed, high cycle applications, and enabled by Samtec's signal integrity-optimized Edge Rate® contact system.

- Choice of 0.50 mm, 0.635 mm or 0.80 mm pitch
- 0.50 mm pitch system offers up to 40% PCB space savings vs. 0.80 mm pitch
- 0.635 mm pitch system with extremely slim 2.5 mm body width
- Rugged latching, locking and 360° shielding
- Up to 1.5 mm contact wipe; robust when "zippered" during unmating
- Compatible with UMPT/UMPS for power/signal flexibility



Signal integrity-optimized Edge Rate® contact system reduces broadside coupling

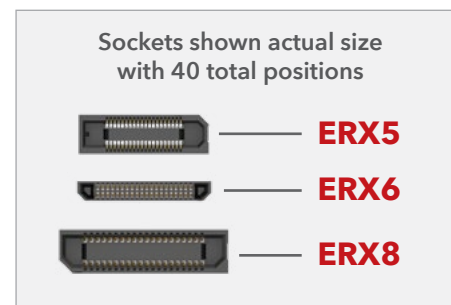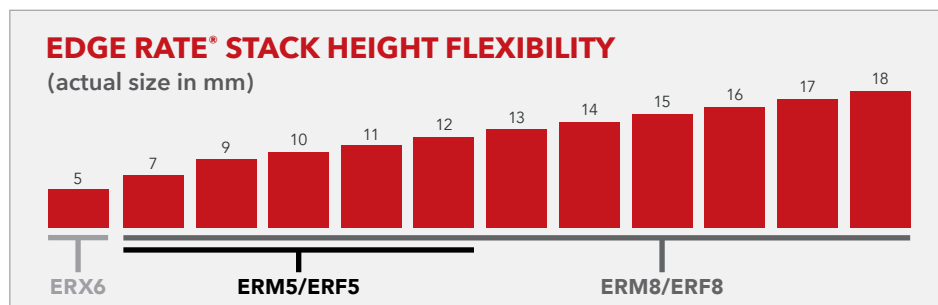

## KEY SPECIFICATIONS





SERIES	PITCH	STACK HEIGHTS	TOTAL PINS / PAIRS	INSULATOR MATERIAL	TERMINAL MATERIAL	PLATING	OPERATING TEMP RANGE	LEAD-FREE SOLDERABLE
ERM5 / ERF5	0.50 mm	7-12 mm	20-150	Black LCP	Phosphor Bronze or BeCu (ERM5), BeCu (ERF5)	Au or Sn over 50 μm (1.27 μm) Ni	-55 °C to +125 °C	Yes
ERM6 / ERF6	0.635 mm	5 mm	20-120		Copper Alloy			
ERM8 / ERF8	0.80 mm	7-18 mm	10-200		Phosphor Bronze or BeCu (ERM8), BeCu (ERF8)			

**(0.80 mm) .0315" PITCH • RUGGED HIGH-SPEED HEADERS & SOCKETS**

TYPE	POSITIONS PER ROW	LEAD STYLE	PLATING OPTION	DV	OPTIONS	"X"R
<b>ERM8</b> = Header	<b>-005, -010, -011, -013, -020, -025, -030, -035, -040, -049, -050, -060, -070, -075, -100</b>	<b>SPECIFY LEAD STYLE FROM CHART</b>	<b>-L</b> = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail <b>-S</b> = 30 μ" (0.76 μm) Gold on contact, Matte Tin on tail		<b>-DS</b> = Differential Pair (ERM8 -05.0 Lead Style with -010, -013, -025, -049 Positions only) <b>-L</b> = Latching (ERM8-05.0 & -09.0 Lead Styles only & -EGP Option N/A) (ERF8-05.0 Lead Style only and -L to -EGP Option N/A)	<b>-TR</b> = Tape & Reel <b>-FR</b> = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)
<b>ERF8</b> = Socket					<b>-EGP</b> = Extended Guide Post (ERM8-05.0 & ERF8-07.0 Lead Style Only & -L Option N/A) <b>-DSP</b> = Differential Pair with Extended Guide Post (ERM8 -05.0 Lead Style with -013 and -025 Positions only) <b>-K</b> = Polyimide Film Pick & Place Pad (-02.0 Lead Style N/A) <b>-P</b> = Pick & Place Pad (ERM8 and -02.0 & -05.0 Lead Styles only)	





(100 Position Only Available with ERM8-09.0 & ERF8-05.0 Lead Styles; -L or -EPG N/A)

**ERM8**  
Board Mates:  
ERF8  
ERM8  
Cable Mates:  
ERCD, ERDP

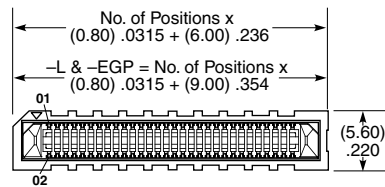

LEAD STYLE	A (ERM8)	B (ERF8)
-02.0	(5.97) .235	N/A
-05.0	(8.91) .351	(5.10) .200
-07.0	N/A	(7.00) .276
-08.0	(11.91) .469	N/A
-09.0	(12.91) .508	(9.00) .354

**ERF8**  
Board Mates:  
ERM8  
Cable Mates:  
ERCD, ERDP

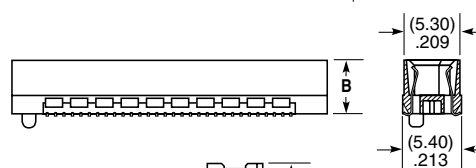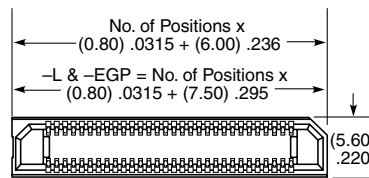

ERM8 LEAD STYLE	MATED HEIGHT*		
	ERF8 LEAD STYLE		
	-05.0	-07.0	-09.0
-02.0	(7.00) .276	(9.00) .354	(11.00) .433
-05.0	(10.00) .394	(12.00) .472	(14.00) .551
-08.0	(13.00) .512	(15.00) .591	(17.00) .669
-09.0	(14.00) .551	(16.00) .629	(18.00) .709

\*Processing conditions will affect mated height.

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.