
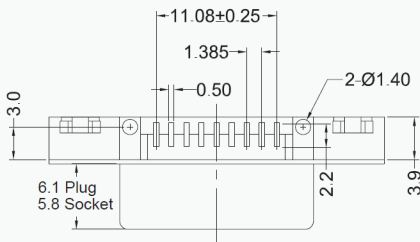
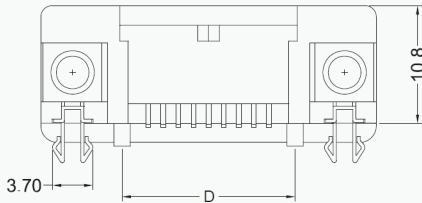


D-SUBMINIATURE CONNECTORS:
K202XHT Series
 Right Angle Surface Mount

K202XHT Series Dimensions
 Dimensions in mm

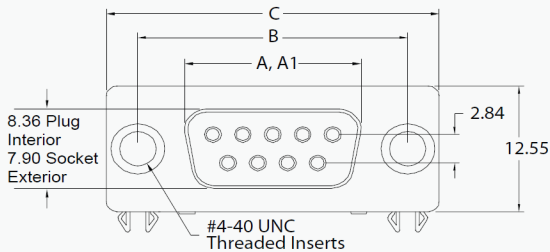

Shell Size	In				
	mm				
	A	A1	B	C	D
	±.010	±.010	±.005	±.015	±.005
	±0.25	±0.25	±0.13	±0.38	±0.13
9 (E)	.643 16.33	.666 16.92	.984 24.99	1.213 30.81	.626 15.90
15 (E)	.643 16.33	N/A	.984 24.99	1.213 30.81	.609 15.46
25 (B)	1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04	1.498 38.06

A = Exterior of Female Shell (S)
 A1 = Interior of Male Shell (P)



Generated Part Number

K202XHT-E15S-N

Part Number Builder

K202XHT	-	E15	S	N	
Series		Shell Size Contact	Contact Type	Mounting Option	Plating Option

Series

K202XHT - D-Subminiature Connector, Right Angle, Ultra Short Footprint, Surface Mount, Reflow Compatible

Shell Size-Contact Option

- E - 9 Contacts
- B - 25 Contacts
- E - 15 Contacts, High Density (Socket only)

Contact Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

Mounting Option

- N - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ - With Boardlocks and JSX-1055 Jackscrews Installed

Plating Option

- Blank - Gold Flash
- 15 - 15µ" Gold
- 30 - 30µ" Gold