


D-SUBMINIATURE CONNECTORS:
K22X Series
 Right Angle PCB Mount 0.318" Footprint

K22X Series Dimensions
 Dimensions in mm

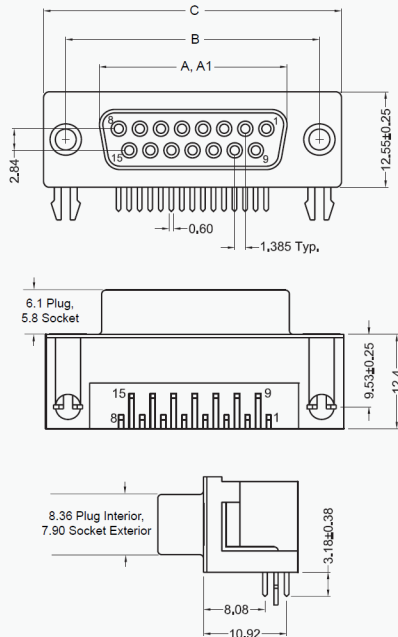

| Shell Size | In mm | | | |
|------------|----------------|----------------|----------------|----------------|
| | A | A1 | B | C |
| | ±.010 ±0.25 | ±.010 ±0.25 | ±.005 ±0.13 | ±.015 ±0.38 |
| 9 (E) | .643 16.33 | .666 16.92 | .984 24.99 | 1.213 30.81 |
| 15 (A) | .971 24.66 | .994 25.25 | 1.312 33.32 | 1.541 39.14 |
| 25 (B) | 1.511 38.38 | 1.534 38.96 | 1.852 47.04 | 2.088 53.04 |
| 37 (C) | 2.159 54.84 | 2.182 55.42 | 2.500 63.50 | 2.729 69.32 |

A = Exterior of Female Shell (S)
 A1 = Interior of Male Shell (P)



Generated Part Number

K22X-E9P-N

Part Number Builder

| | | | | | |
|--------|---|--------------------|--------------|-----------------|----------------|
| K22X | - | E9 | P | N | |
| Series | | Shell Size Contact | Contact Type | Mounting Option | Plating Option |

Series

K22X - D-Subminiature Connector, Right Angle

Shell Size-Contact Option

- E - 9 Contacts
- A - 15 Contacts
- B - 25 Contacts
- C - 37 Contacts

Contact Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

Mounting Option

- N - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ - With Boardlocks and # 4-40 Jackscrews Installed

Plating Option

- Blank - Gold Flash
- 30 - 30µ" Gold