




D-SUBMINIATURE CONNECTORS:

K42X Series
Dual-Port D-Sub

K42X Series Dimensions

Dimensions in mm

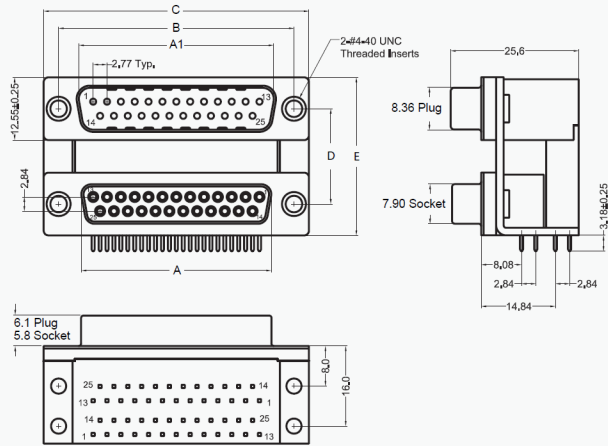

Number of Contacts (Shell Size)	Dimensions (Inch/mm)			
	A	A1	B	C
9 (E)	.643 16.33	.666 16.92	.984 24.99	1.213 30.81
15 (A)	.971 24.66	.994 25.25	1.312 33.32	1.541 39.14
25 (B)	1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04
37 (C)	2.159 54.84	2.181 55.42	2.500 63.50	2.729 69.32

Center to Center Spacing	D	E
A	.750 19.05	1.244 31.60
B	.900 22.86	1.394 35.41
C	.625 15.88	1.119 28.42

A = Exterior of Female Shell (S)
A1 = Interior of Male Shell (P)

Generated Part Number

K42X-E9P/P-A4N

Part Number Builder

K42X	-	E9	P	E9	P	A4N	
Series		Top/Bottom Shell Size		Center Distance		Boardlock Option	Jackscrews Option

Series

K42X - Dual-Port D-Subminiature Connector

Top/Bottom Shell Size

- 9/9 - 9 Contacts over 9 Contacts
- 15/15 - 15 Contacts over 15 Contacts
- 25/25 - 25 Contacts over 25 Contacts
- 37/37 - 37 Contacts over 37 Contacts

Top/Bottom Connector Type

- P/P - (Plug/Plug)
- P/S - (Plug/Receptacle)
- S/S - (Receptacle/Receptacle)
- S/P - (Receptacle/Plug)

Center to Center Distance

A - 0.750" (Standard)

Boardlocks Option

4N - Boardlocks (Standard)

Jackscrews Option

- Blank - No Jackscrews
- J - #4-40 Jackscrews Installed