
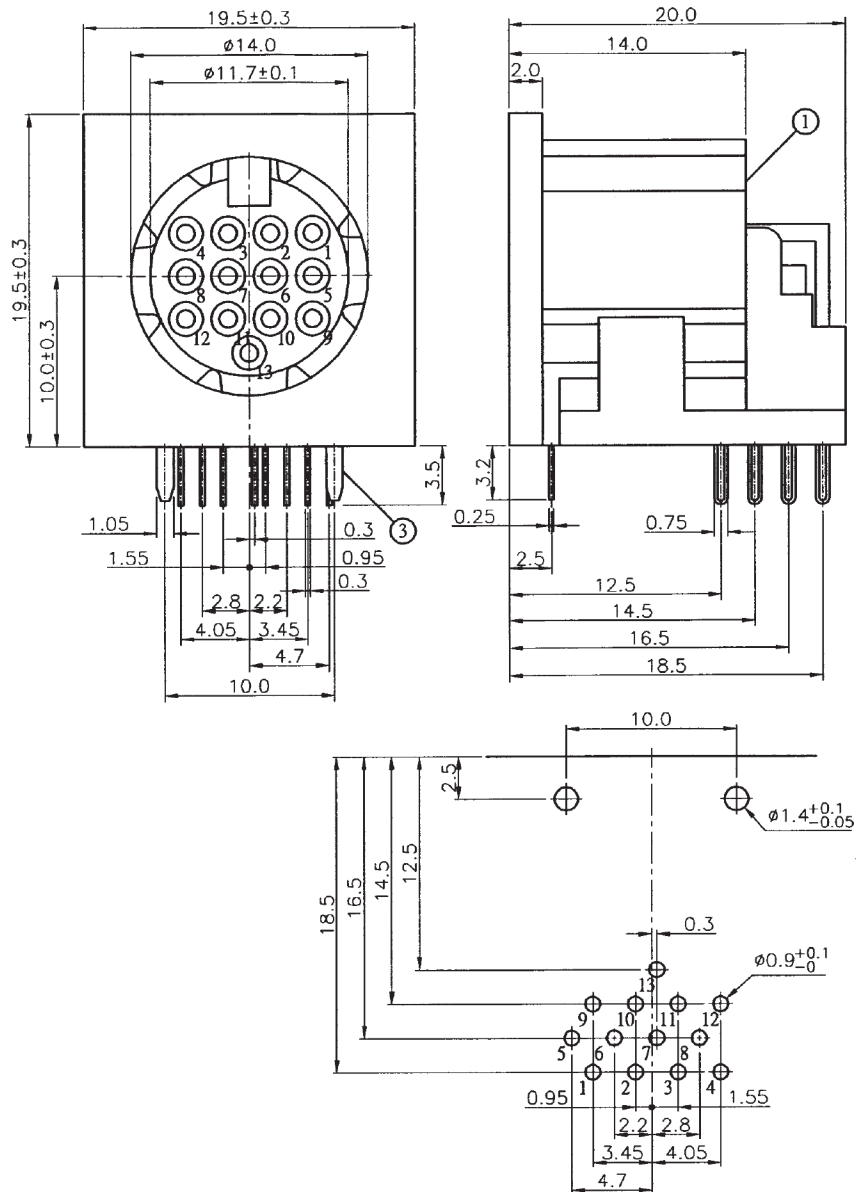


13 Pin PCB Mount Through Board DIN Socket
DS-101-R

13 Pin DIN unshielded DIN Socket



Ordering Information:

DS-101-R

(moq may apply)

Specification:

Insulator Material:	PBT UL94V-0 Black
Contact Material:	PBSR-H 0.2t
Earth Terminal:	PBSR-H 0.25t Silver plated
Contact Plating:	Silver plated
Solder Tail Plating:	Tin plated
Current Rating:	AC:1A per contact @ 100V DC:12V 2A
DWV:	500V AC (RMS) 1minute
Insulation Resistance:	100MΩ min. @ 500 VDC applied
Contact Resistance:	100mΩ Max.(after 1000 cycles)
Operating Temperature:	-40°C to +85°C
Mating/Unmating Force:	3.0 Kgf Max. / 0.5 Kgf Min.

Unless otherwise specified, tolerance is ±0.20mm