


IP-Lxx-D-Tx-Mx

NYLON INSULATING PILLARS

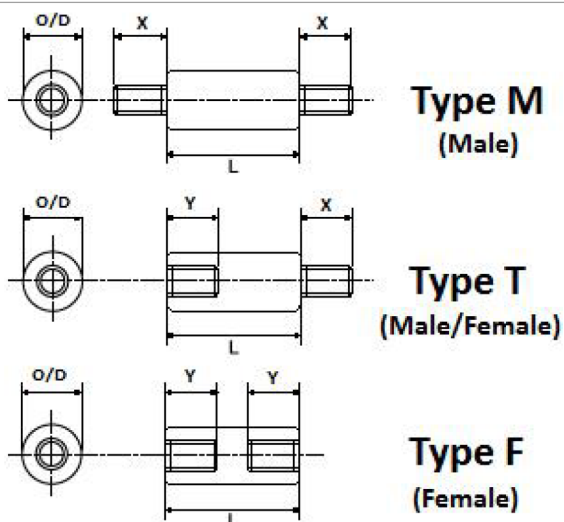

PRODUCT INFORMATION

- Material: Nylon 66
 - Inserts: Brass (CZ121) Self Colour
 - Flammability Rating: UL94-V2
 - Operating Temperature: -30°C to +80°C
 - Minimum Order: 100 Pieces
 - Free samples available on request
- We have a vast range of standard nylon pillars. However, we can manufacture specials, at very competitive prices, to meet your requirements.

ALL MEASUREMENTS IN MILLIMETRES

PRODUCT TABLE

SAMPLE CODE: IP-L20-D8.0-TT-M3

IP = Insulating Pillar **L** = Length **D** = Body O/D **TT** = Male/Female **M3** = Thread Size

OTHER COMBINATIONS OF BODY O/D, STUD LENGTHS ETC. ARE AVAILABLE ON REQUEST

Thread	Minimum Body Length	Standard O/D	Body Length	Standard Stud Length (X) & Depth (Y)
M2.5	13.0	8.0	13.0 - 100.0	6.0
M3	13.0	8.0	13.0 - 100.0	6.0
M3.5	13.0	8.0	13.0 - 100.0	6.0
M4	13.0	8.0	13.0 - 100.0	6.0
M5	19.0	9.5	19.0 - 100.0	10.0
M6	22.0	12.7	22.0 - 100.0	12.0
M8	25.0	15.9	25.0 - 100.0	14.0
M8	35.0	19.0	35.0 - 100.0	14.0
M10	40.0	25.0	40.0 - 100.0	20.0