



 This dwg is for reference only, Actual dwg should be based on formal engineering dwg.

P.C.B ϕ 3.5
THICKNESS 1.6

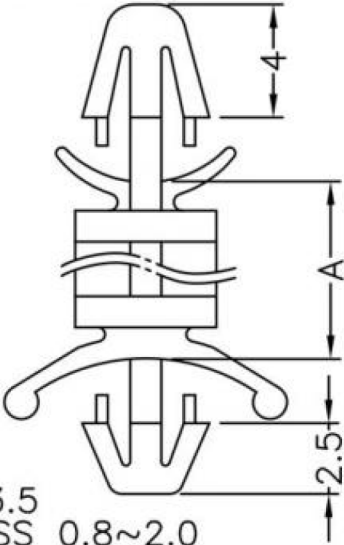

P.C.B ϕ 3.5
THICKNESS 0.8~2.0

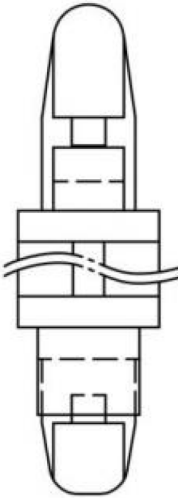

A
3.2

All measurement does not include gate which raises under 0.3mm.

See series table for more options

the vital component	PART NUMBER LCD-3			SPEC. DWG.	
	TITLE SPACER SUPPORT				
	MATERIAL NYLON 66(UL) 94V-2			COLOR NATURAL	
	SIZE A4	SCALE 2:1	UNIT mm	CHECK Z.C	

PART NO	A	
LCD-4	4.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-5	4.8	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-6	6.4	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-7	7.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-8	8.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-9	9.6	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-11	11.2	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-12	12.7	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-14	14.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-16	16.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-18	18.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-19	19.1	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
LCD-27	27.5	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.