



P.C.B $\phi 4.0$
THICKNESS 1.6

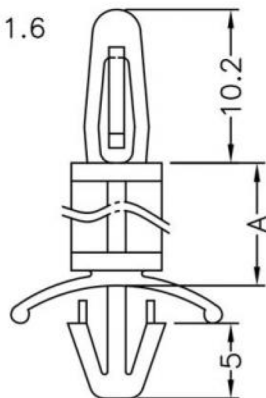

P.C.B $\phi 4.8$
THICKNESS 0.8~2.0

A
3.5



All measurement does not include gate which raises under 0.3mm.

the **vital**
component

PART NUMBER LCS-3			SPEC. DWG.		
TITLE SPACER SUPPORT					
MATERIAL NYLON 66(UL) 94V-2			COLOR NATURAL		
SIZE A4	SCALE 2:1	UNIT mm	CHECK Z.C		

PART NO	A	
LCS-5	4.8	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-6	6.0	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-6A	6.4	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-8	7.9	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-9	9.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-11	11.1	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-12	12.7	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-16	15.9	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-19	19.1	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-22	22.2	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-24	24.0	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-25	25.4	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-27.5	27.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
LCS-28	28.6	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	

PART NO	A
LCS-31.1	31.1

[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.

LCS-31.7	31.7
----------	------

[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.

LCS-35	34.9
--------	------

[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.