



HOLE IN P.C.B $\varnothing 2.5$
P.C.B THICKNESS 1.6


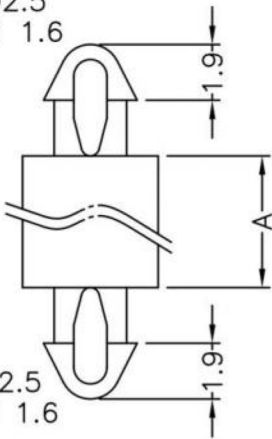


HOLE IN P.C.B $\varnothing 2.5$
P.C.B THICKNESS 1.6

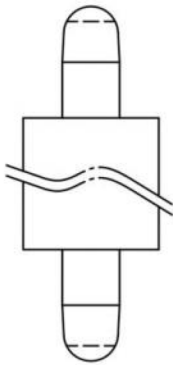

A
2.0

PART NO	A	
MADM-3	3.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
MADM-4	4.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
MADM-4.5	4.5	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.
MADM-5	5.0	
		[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.

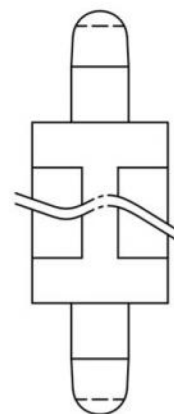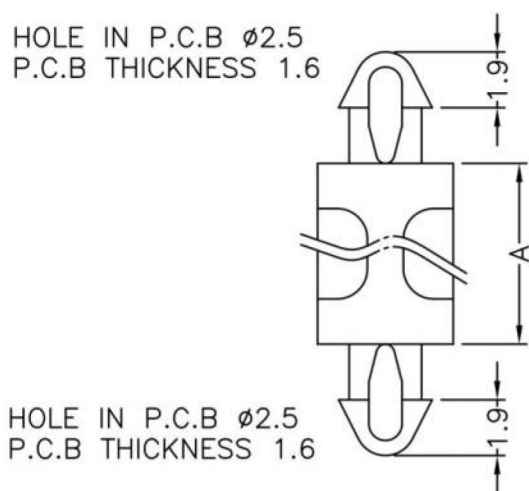

A
6.0

PART NUMBER			MADM-6			SPEC. DWG.																	
TITLE									SPACER SUPPORT														
MATERIAL						NYLON 66(UL) 94V-2						COLOR			NATURAL								
SIZE			A4			SCALE			2:1			UNIT			mm			CHECK			Z.C		

PART NO	A	
MADM-6.5	6.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-7.5	7.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-8	8.0	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-9.5	9.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-10A	10.0	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-10	10.5	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	
MADM-27	27.0	
	[1] NYLON 66(UL), Flame class: 94V-0/94V-2, Color: BLACK/NATURAL.	