VALCON
QUALITY VALUE COMPONENTS

MDC-18x-R Series - Screw Type Mini-DIN Vertical Mount Sockets

RoHS compliant (suffix -R)

Option ***x*** = Number of positions - 3,4,5,6 & 8 Pin (some sizes subject to MOQ)

Specification:

Insulator Material:	PBT UL94V-0 Black
Contact Material:	Phosphor Bronze - Tin plated
Current Rating:	100V AC, 1 Amp or 12V DC 2Amp max.
DWV:	250V AC for 1 minute
Insulation Resistance:	50MΩ min. @250V DC
Contact Resistance:	30mΩ Max
Operating Temperature:	-25°C to +85°C
Insertion/Withdrawal Force:	4.5kg Max. / 0.9kg - 3kg

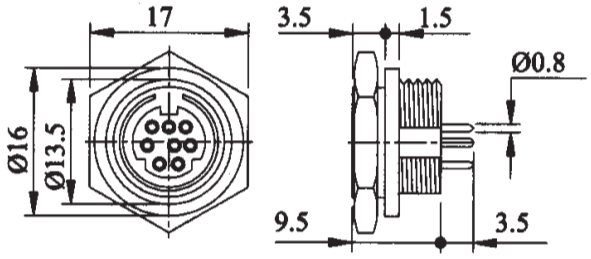

SCREW TYPE
(MDC-183~MDC-188)

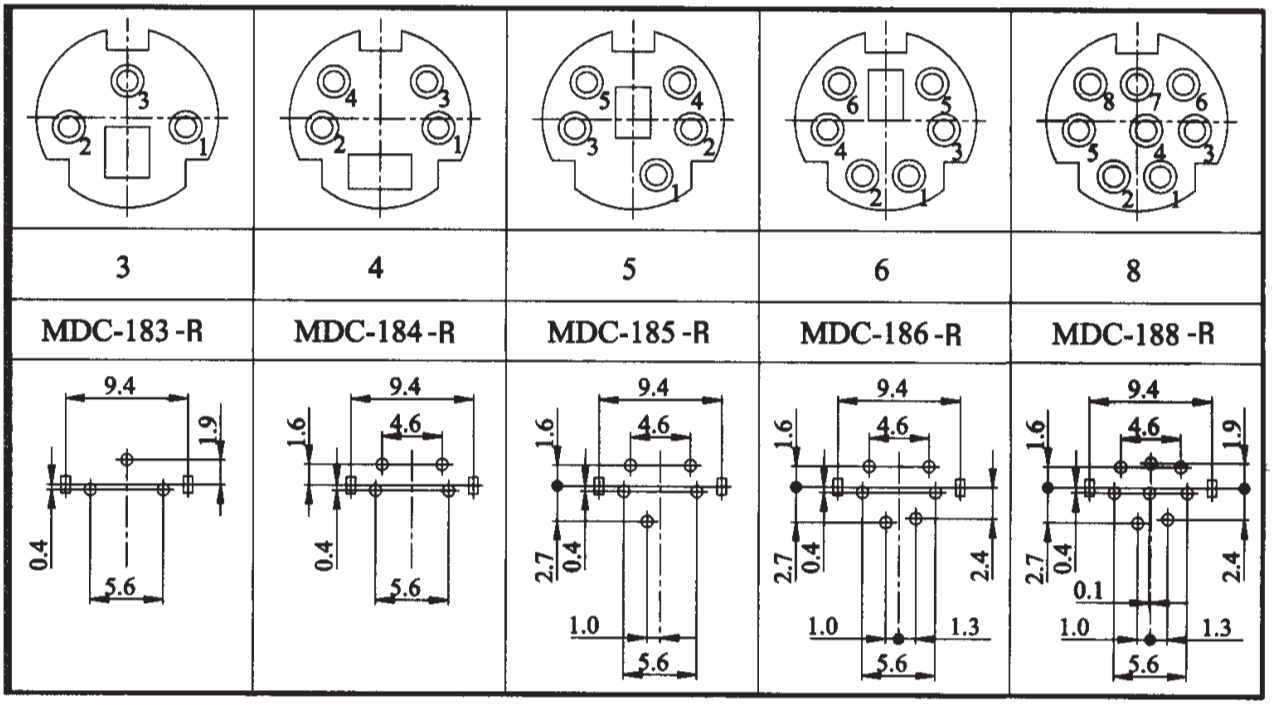

TOBY
THE VITAL COMPONENT

the **vital** component

Tel: 01295 271777 Fax: 01295 271744 Web: www.toby.co.uk email: sales@toby.co.uk