


Brass Stand-off Spacers - Male & Female Ends VBMP-Mx-OD-xx Series

Brass (CZ121) Nickel plated RoHS compliant spacers
Five thread types available - M2, M2.5, M3, M4 & M5

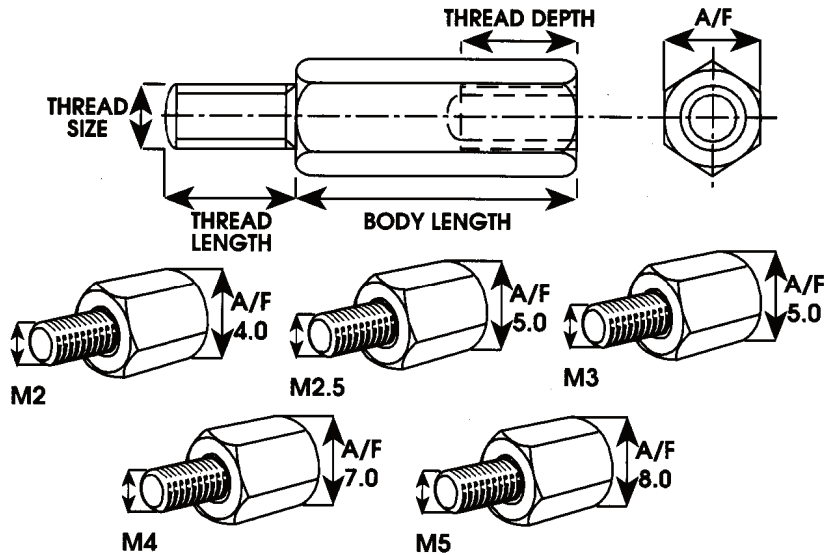

Ordering Information:

VBMP - Mx - O/D - xx (mm)
1 2 3

Option 1 (Mx) Mx = Mx thread type
M2, M2.5, M3 & M4

Option 2 (O/D) O/D = Outer diameter in mm (Across flats A/F)
4.0 (M2), 5.0 (M2.5), 5.0 (M3), 7.0 (M4) 8.0 (M5)
Please note: M5 is special order only (MOQ may apply)

Option 3 (xx) xx = Overall Body Length in mm (plus male thread length 6mm (M2 & M2.5) and 8mm (M3 & M4)
02mm to 50mm
(longer custom lengths may be available subject to MOQ)

Please Note - Male thread lengths are 6mm for M2 & M2.5 - and 8mm for M3 & M4

Female thread depth is 4mm for overall body length up to 7mm & 6mm thread depth for overall body length over 8mm (M2 & M2.5)

Female thread depth is 4 & 6mm for overall body length up to 8mm & 8mm thread depth for overall body length over 10mm (M3 & M4)

Ordering example VBMP-M2-4.0-08 is an 8mm length M2 spacer with a 6mm male end

Please note:

Thread type (Mx) and O/D order codes must always match the Mx thread requirement