
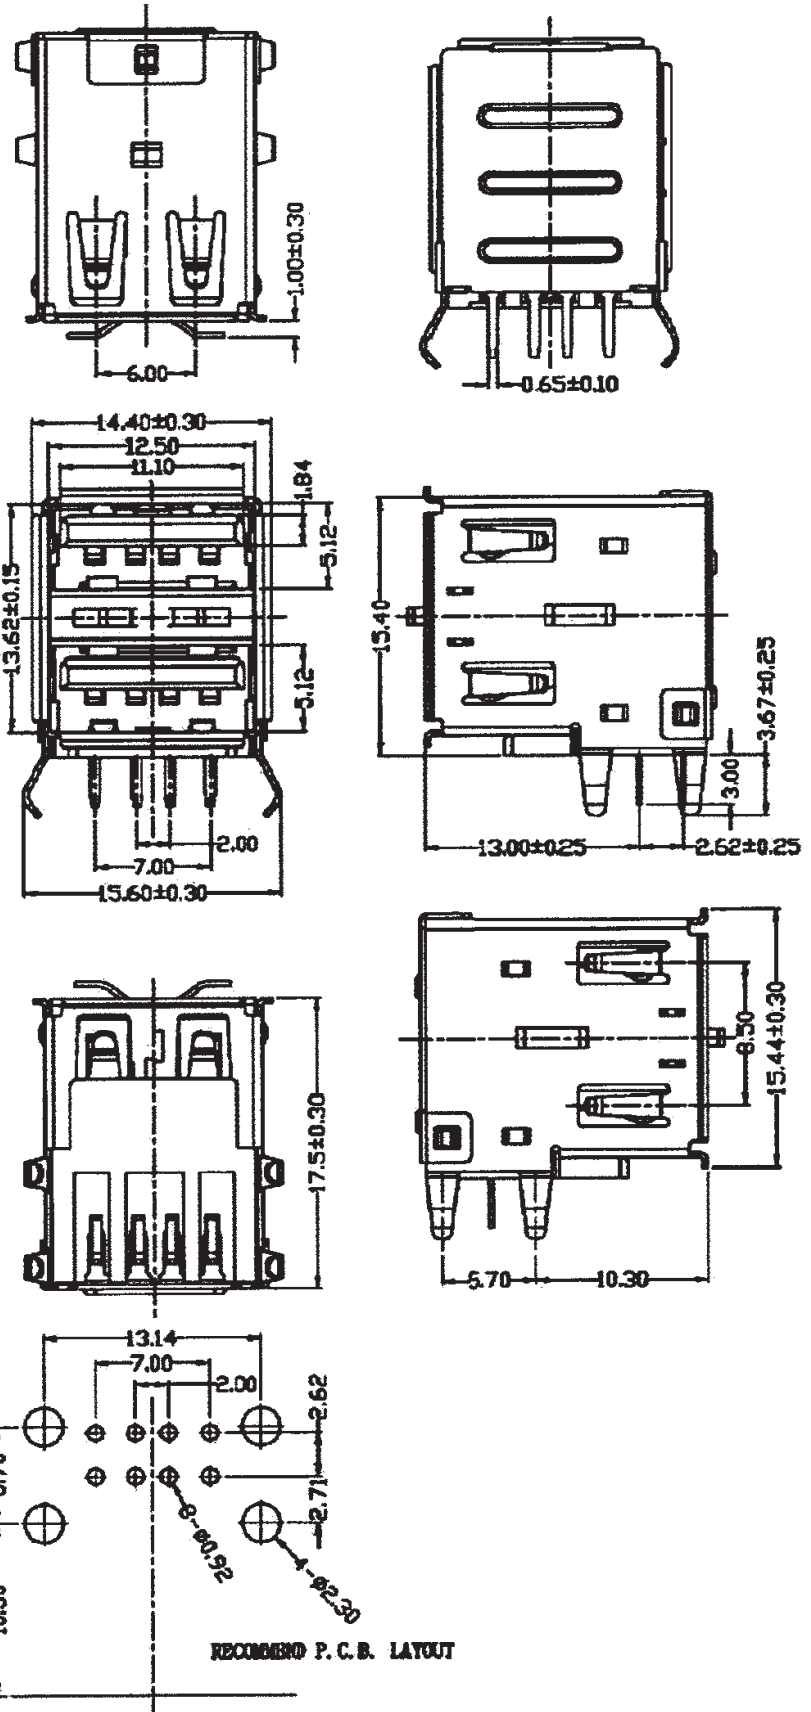


USB Type A Dual Port Receptacle - 317AE-04-PSD-1011 Series

Through board with rear shield - Meets USB 1.1 & 2.0 specification - RoHS Compliant - White Insulator

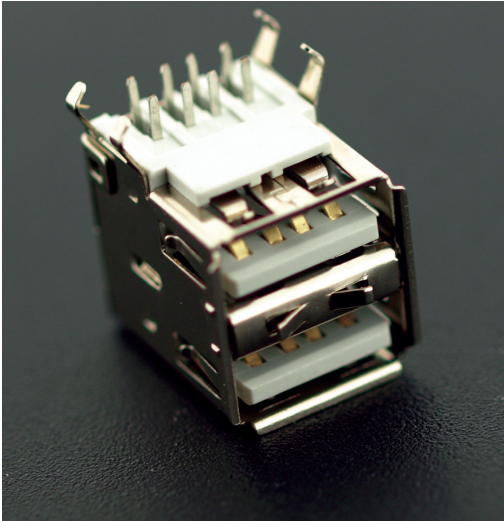

Specification

Insulator Material:

Thermoplastic PBT UL94V-0 White

Contact Material:

Copper Alloy

Shell:

Copper Alloy - Ni plated

Contact Plating:

Gold flash over Ni underplate (mating contacts)

Solder Tail Plating:

Tin over Ni

Current Rating:

1A per contact

DWV:

750AV AC for 1 minute

Insulation Resistance:

1000MΩ min.

Contact Resistance:

30mΩ Max.

Operating Temperature:

-40°C to +60°C

Mating/Unmating Force:

3.5 Kgf Max. / 1.0 Kgf Min.

Durability:

1500 mating cycles

Ordering Information:

317AE-04-PSD-1011