
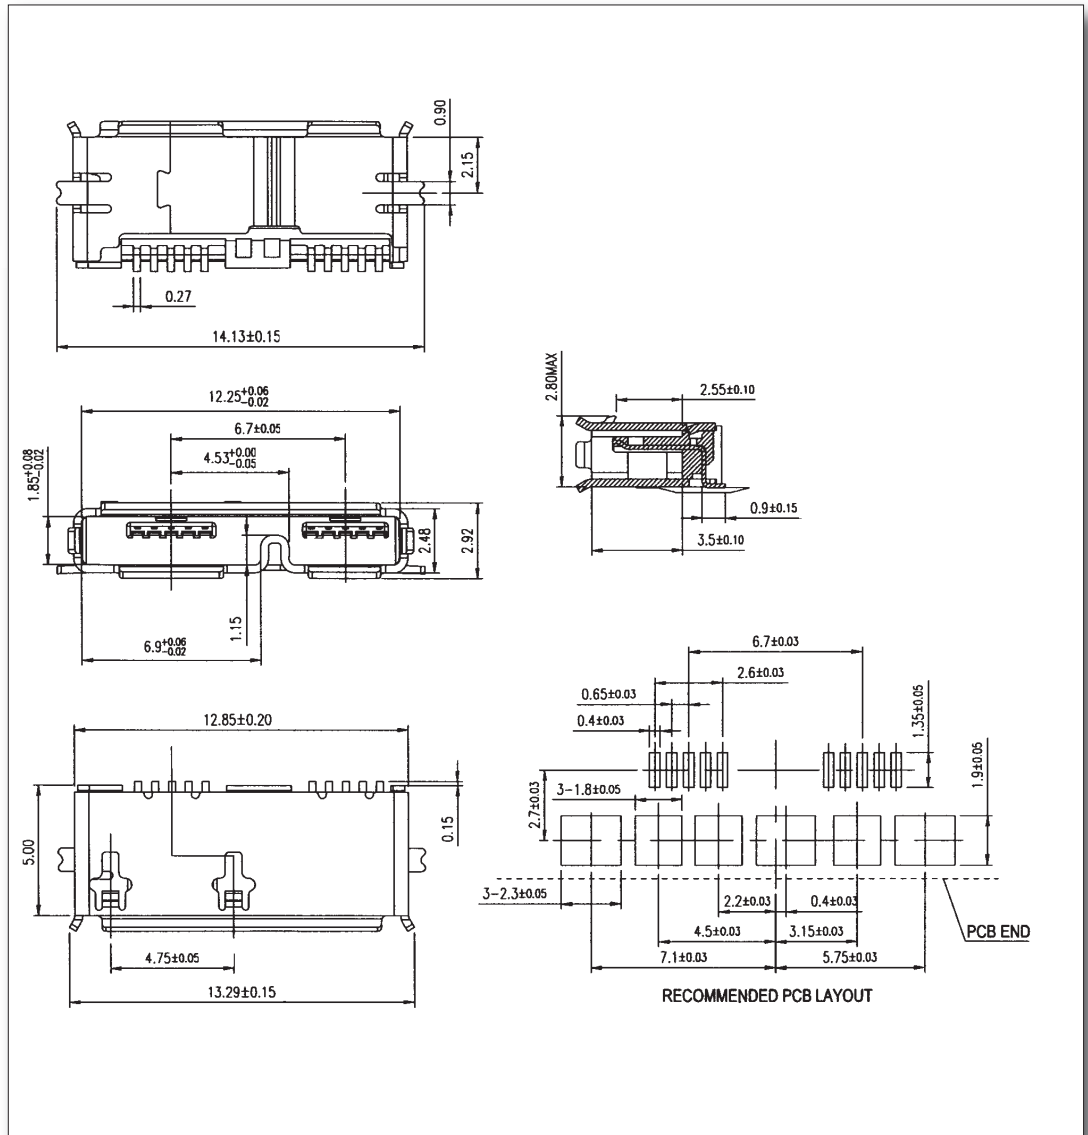


**Micro USB3.0 PCB Mount AB-Type Surface Mount Socket with SMT PCB Tabs**  
**VMUSB3-AB-G-S-SST Series**

Black plastic inserts with gold (15 micron) plated contacts  
Tin plated shell



**Ordering Information for VMUSB3-AB-G-S-SST Series**



**VMUSB3-AB-G-S-SST**

**Specification for VMUSB3-AB-G-S-SST Series**

Contact Material:	Phosphor bronze
Contact Plating:	15 micron (u") Gold Plated
Body (Insert):	LCP UL94V-0 Rated Black
Shell Material:	Stainless Steel (Ni 80u" plated)
Rated Current:	1A per contact - DWV - AC500V
Insulation Resistance:	1000 M $\Omega$ Max.
Contact Resistance:	50 m $\Omega$ min.
Operating Temperature:	-25°C to +70°C
Mating Force:	35n
Unmating Force:	10n (min.)

## Micro USB3.0 PCB Mount AB-Type Surface Mount Socket with Through Board PCB Tabs VMUSB3-AB-G-S-TST Series

Black plastic inserts with gold (15 micron) plated contacts  
Tin plated shell

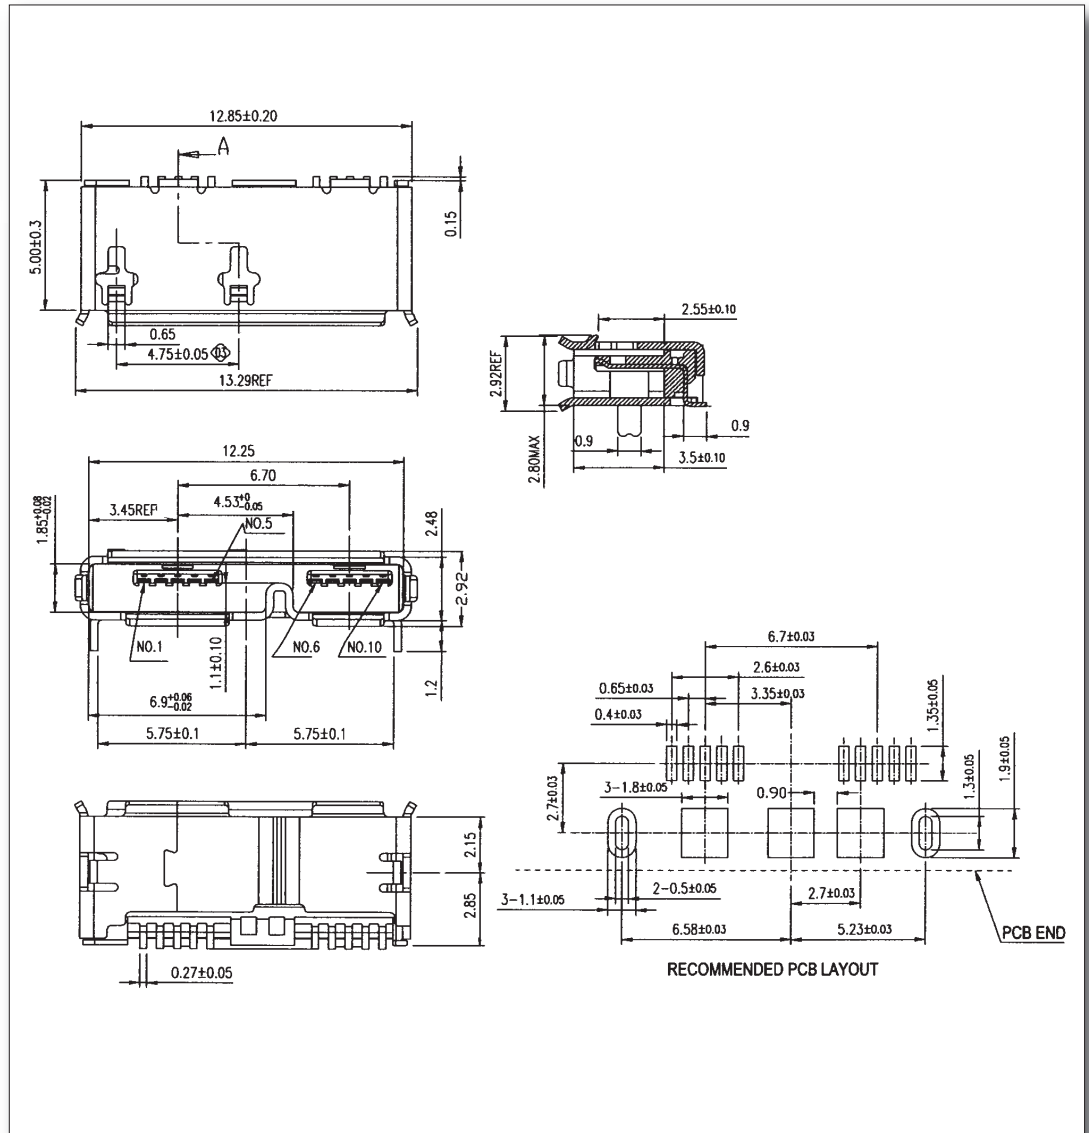

### Ordering Information for VMUSB3-AB-G-S-TST Series Specification for VMUSB3-AB-G-S-TST Series

#### VMUSB3-AB-G-S-TST

Contact Material:	Phosphor bronze
Contact Plating:	15 micron (u") Gold Plated
Body (Insert):	LCP UL94V-0 Rated Black
Shell Material:	Stainless Steel (Ni 80u" plated)
Rated Current:	1A per contact - DWV - AC500V
Insulation Resistance:	1000 MΩ Max.
Contact Resistance:	50 mΩ min.
Operating Temperature:	-25°C to +70°C
Mating Force:	35n
Unmating Force:	10n (min.)