
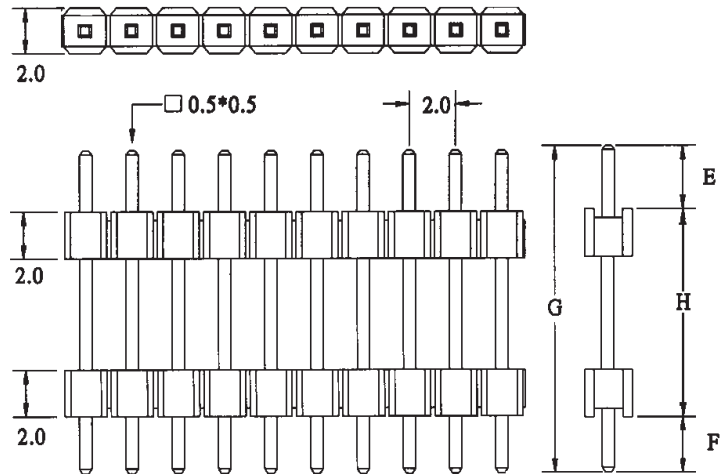


## 2.00mm Pitch Single Row Through Board PCB Stackers - TBS1-xxR-040/075/028 Series

2.00mm pitch - Dual body - Single row (SIL)  
Gold flash plated contacts  
From 1x1 to 1x40 positions  
Custom pin lengths available

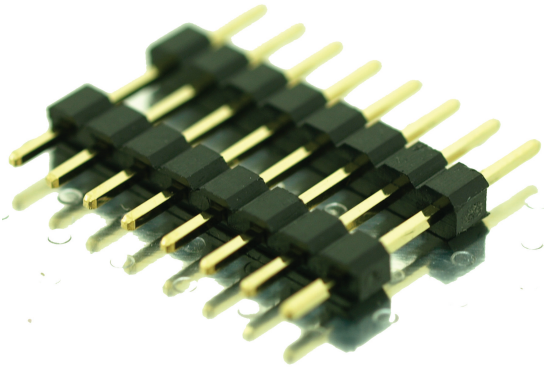

Standard option Dimensions:

**E** = 4mm Contact Pin  
**H** = 7.5mm Board Space  
**F** = 2.8mm PCB Tail  
**G** = 14.30mm Overall Pin Length

Or custom pin lengths

### Specification:

Contact Material:	Brass
Contact Plating:	Gold Flash Plated (R)
Body:	GFP UL94V-0 Rated Black
Rated Current:	1A - DWV - AC500V
Insulation Resistance:	5000 MΩ Max.
Operating Temperature:	-40°C to +105°C

### Ordering Information:

#### TBS1 - xxR -040 - 075 - 028

**1      2      3      4**

- Option 1 (xx)**      Total number of positions per row  
01 to 40
- Option 2 (040)**      Contact Pin Length (**E**)  
040 = 4.00mm (Standard) or xxx = custom option
- Option 3 (075)**      PCB Space (**H**)  
075 = 7.50mm (Standard) or xxx = custom option
- Option 4 (028)**      Solder Tail Length (**F**)  
028 = 2.80mm (Standard) or xxx = custom option

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities