

FLEX STACK

HTSS-125-01-L-DV

ZSS-113-03-L-D-0735

(2.54 mm) .100"

TSS, HTSS, ZSS SERIES

SHROUDED .025" SQ POST HEADERS

Mates with:

SSW, SSQ, ESW, ESQ, SSM, BCS

SPECIFICATIONS

For complete specifications see www.samtec.com?TSS, www.samtec.com?HTSS or www.samtec.com?ZSS

Insulator Material:

TSS, ZSS: Black Glass Filled Polyester

HTSS: Natural PCT

Insulation Resistance:

5000 MΩ min

Terminal Material:

Phosphor Bronze

Plating: Au or Sn over

50 μm (1.27 μm) Ni

Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

Flammability Rating:

UL 94V-O

Withstanding Voltage:

1000 VRMS

RoHS Compliant: Yes

PROCESSING

Lead-Free Solderable:

HTSS: Yes

TSS, ZSS: Wave Only

SMT Lead Coplanarity:

(0.15 mm) .006" max*

*(.004" stencil solution

may be available; contact

IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



OTHER SOLUTIONS



- Shrouded IDC headers and stackers to mate with IDSD, SMDS Series. See TST, HTST and ZST Series.

ALSO AVAILABLE (MOQ Required)

- Other sizes
- Other platings
- Alignment Pins
- Single Row
- Locking Leads
- Polarized

Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable. ZSS is non-standard, non-returnable.

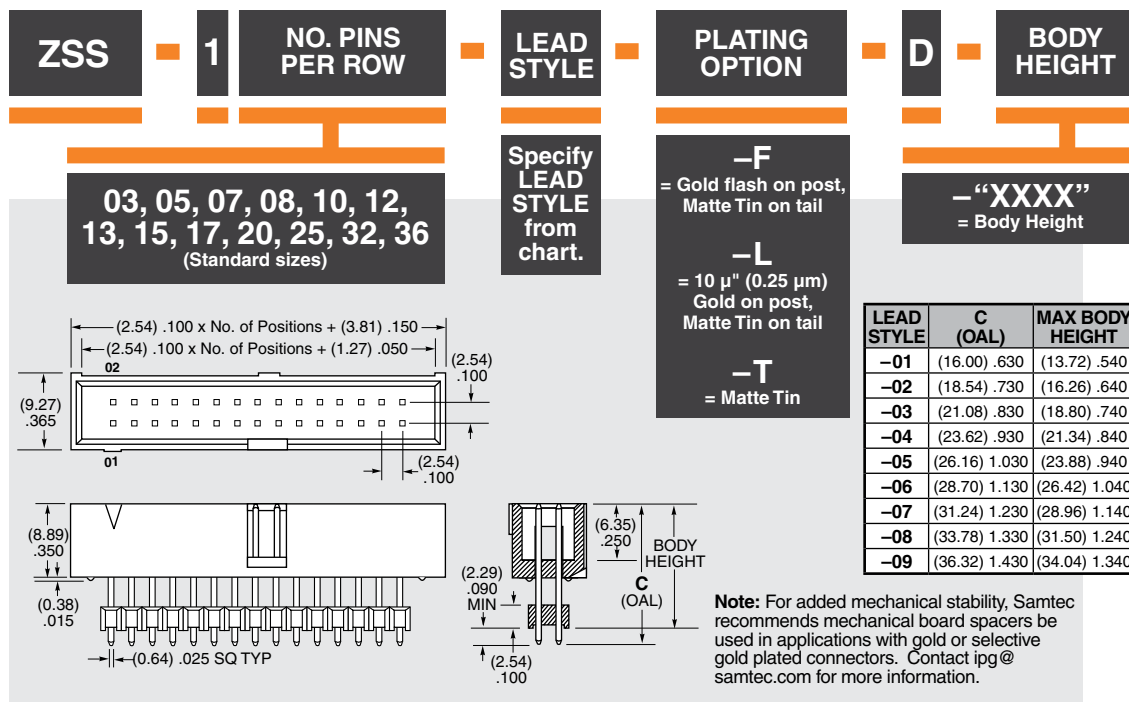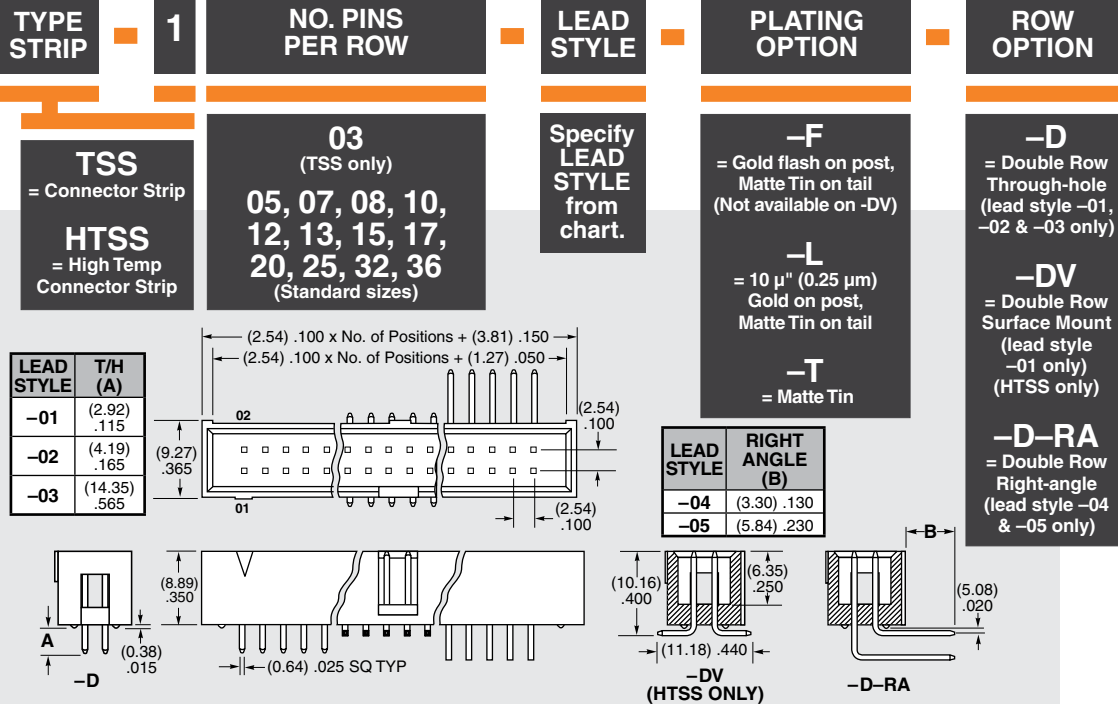

Note: For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.