

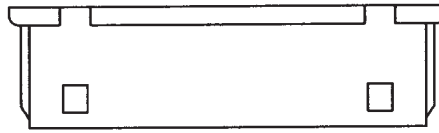




1.25mm Pitch Crimp Housing - 0800-Hxx Series

UL Approved Number E182481



Mates with Valcon 0800-TTAPx series crimps

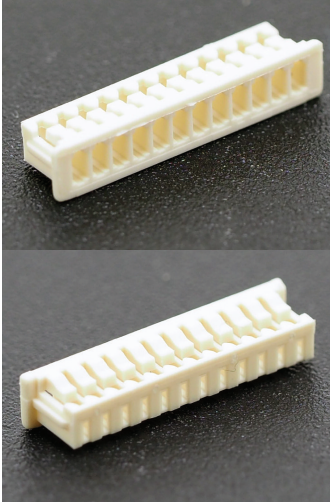

3Circuit

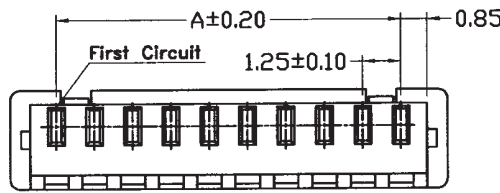

2Circuit

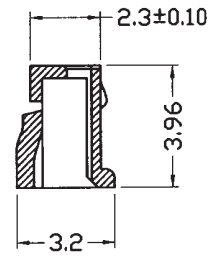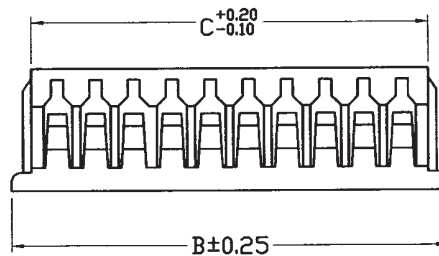

Circuits	Dimension mm			Circuits	Dimension mm		
	A	B	C		A	B	C
2	1.25	4.25	2.95	9	10.00	13.00	11.70
3	2.50	5.50	4.20	10	11.25	14.25	12.95
4	3.75	6.75	5.45	11	12.50	15.50	14.20
5	5.00	8.00	6.70	12	13.75	16.75	15.45
6	6.25	9.25	7.95	13	15.00	18.00	16.70
7	7.50	10.50	9.20	14	16.25	19.25	17.95
8	8.75	11.75	10.45	15	17.50	20.50	19.20

UL US E182481

Ordering Information:

0800- Hxx

1

Option 1(xx)

Number of positions (in total)
**02,03,04,05,06,07,08,
09,10,11,12,13,14 & 15**

Please note - some sizes may be subject to MOQ

Specification:

Insulator Material:	Nylon 66 UL94V-0 Halogen free
Insulator Colour:	Light brown or light grey
Operating Temperature:	-25°C to +85°C
Tolerance:	±0.35mm ~ ±0.05mm
Approvals:	UL Number E182481
Mating:	0800-TTAPx Crimps