
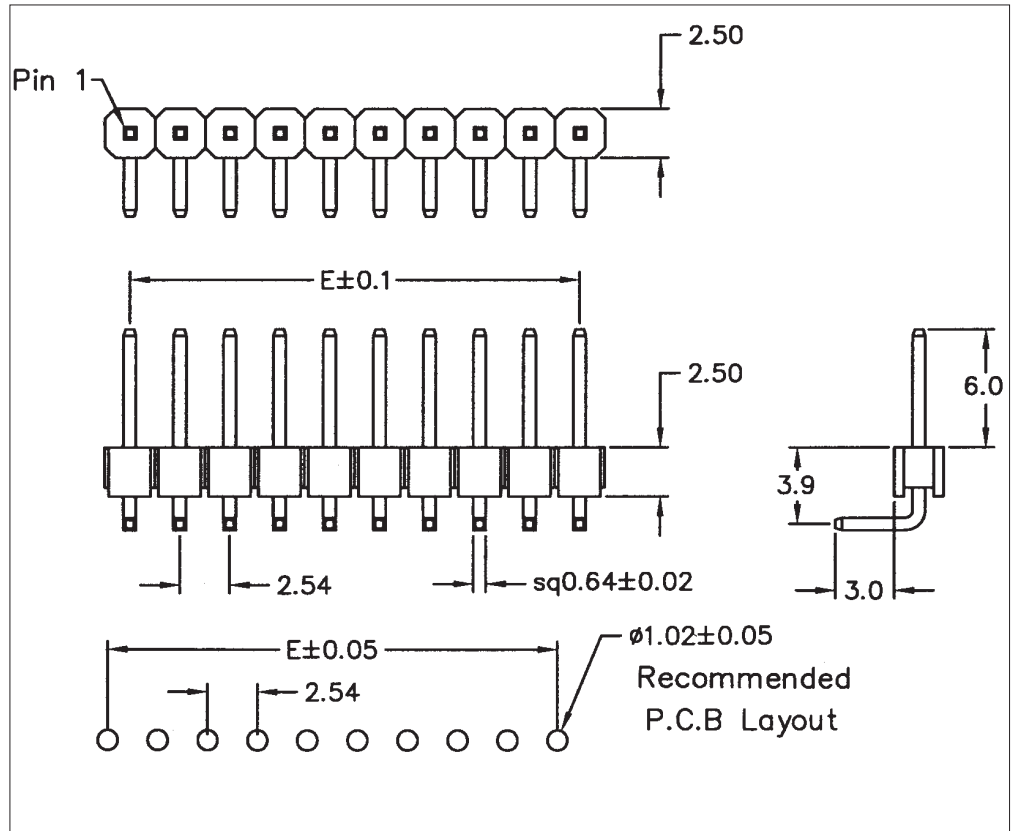


2.54mm Pitch Single Row Through Board Right Angle Flush Mount PCB Mount Pin Header THS-xx-R-RAF Series

2.54mm Pin Pitch
Gold Flash Plated Contacts
From 1 to 40 Positions

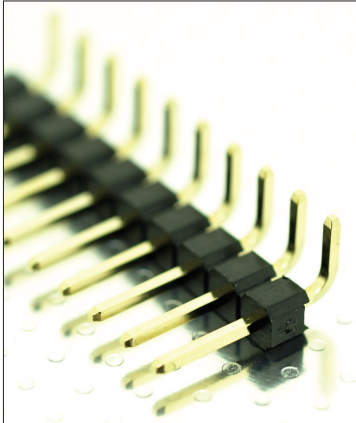

Ordering Information for THS-xx-R-RAF Series

THS - xx- R - RAF
1

Option 1(xx) Number of Positions per row
01 to 40

Specification for THS-xx-R-RAF Series

Contact Material:	Brass
Contact Plating:	Gold Flash Plated
Body:	30% GFPBT UL94V-0 Rated Black
Rated Current:	3A
DWV	AC500V for one minute
Insulation Resistance:	5000 M Ω min.
Contact Resistance:	20m Ω Max
Operating Temperature:	-40°C to +105°C

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities.