


309AE-xx-AG-xx-1555 Series

2.54mm Pitch Extended Single Row PCB Sockets

- Through Board - various PCB heights - See below
- Gold Flash Plating on contacts
- **PC104 types available**

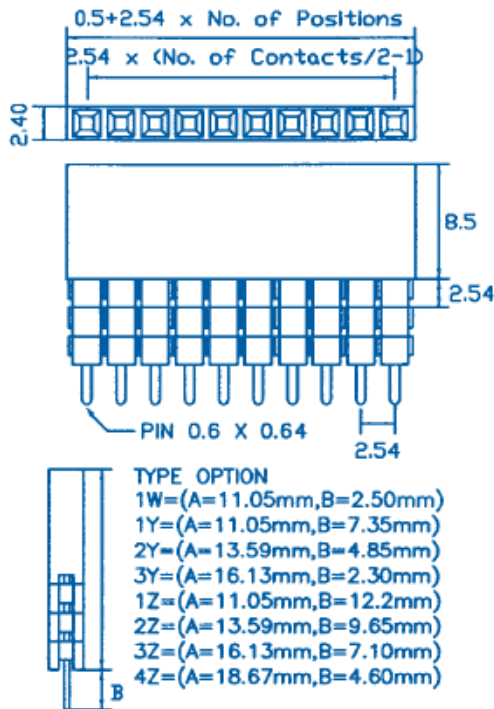

Specification for 309AE-xx-xG-xx-1555 Series

Contact Material:	Phosphor Bronze
Contact Plating:	Gold Flash Plated
Body:	PBT UL94V-0 Rated Black
Rated Current:	3A - DWV - AC500V
Insulation Resistance:	5000 MegaOhms Max.
Contact Resistance:	20 milliOhms Max
Operating Temperature:	-40 to +105 Degrees C

Ordering Information for 309AE-xx-AG-xx-1555 Series

309AE- xx - AG - xx - 1555



1 2

- Option 1** **Number of contacts**
02 to 40
- Option 2** **Type Options (dimensions A & B)**
See table above
PC/104 styles are 1W & 1Z types

309AE-xx-SG-xx-1555 Series

2.54mm Pitch Extended Dual Row PCB Sockets

- Through Board - various PCB heights - See below
- Gold Flash Plating on contacts
- **PC104 types available**

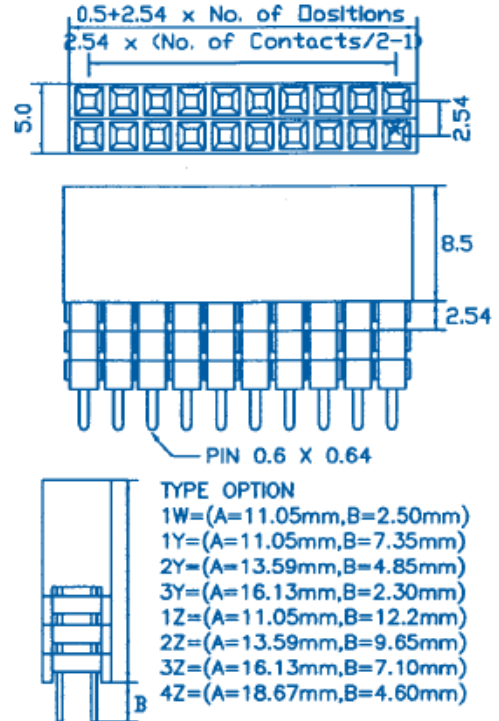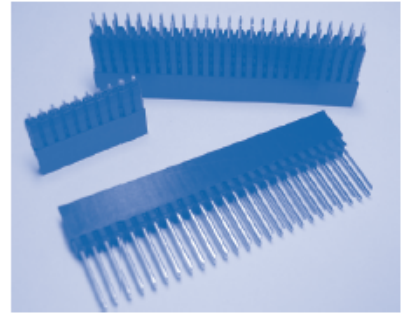

Ordering Information for 309AE-xx-SG-xx-1555 Series

309AE- xx - SG - xx - 1555

1 2

- Option 1** **Number of contacts**
04 (2x2) to 80 (2x40)
- Option 2** **Type Options (dimensions A & B)**
See table above
PC-104 styles are 1W & 1Z types

Standard PC/104 style dual row types

- 309AE-40-SG-1W-1555 (2x20)
- 309AE-40-SG-1Z-1555 (2x20)
- 309AE-64-SG-1W-1555 (2x32)
- 309AE-64-SG-1Z-1555 (2x32)

