LED MOUNTS/SPACERS

Extruded, Self-Retaining LED Mounts

- Self Retaining feature for auto insertion & pre-assembly
- Universal fit for all through-hole LEDs
- Available in standard and metric sizes
- Operating temperature range -40°C~ +85°C

Price Code Chart

"L" Dimensions	ELM 1	ELM 2, ELM 4 ELM 5, ELM 7	ELM 3
.030075 (1.0 - 1.9)	V	U	W
.080150 (2.0 - 3.8)	W	V	W
.155230 (4.0 - 5.8)	Х	W	Х
.235310 (6.0 - 7.9)	Z	Х	Y
.315380 (8.0 - 9.7)	Z	Y	Z
.385495 (9.8 - 12.6)	ZZ	Z	ZZ
.500750 (12.7 - 19.1)	ZZZ	ZZZ	ZZZ
.755 - 1.250 (19.2 - 31.8)	ZZZZ	ZZZZ	ZZZZ

Examples:


ELM 3-050 is price code W ELM 1-410 is price code ZZ ELM 2-400 is price code Z


Standard Tolerances Extruded LED Mounted:


Tolerances: O.D. ±.005 (.13), I.D. ±.005 (.13) "L" Dim: .030 - .500 (1.0 - 12.7) is ±.005 (.13) "L" Dim: .505 - .750 (12.8 - 19.1) is ±.008 (.20) "L" Dim: .750 - 1.250 (19.2 - 21.8) is ±.015 (.38)

UL Rated 94V-0 PVC Alloy Oxygen Index: +28% UL File #E179500

Ordering Information:



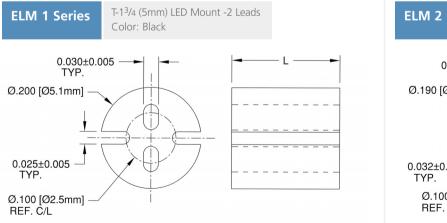





LED MOUNTS/SPACERS Extruded, Self-Retaining LED Mounts

