
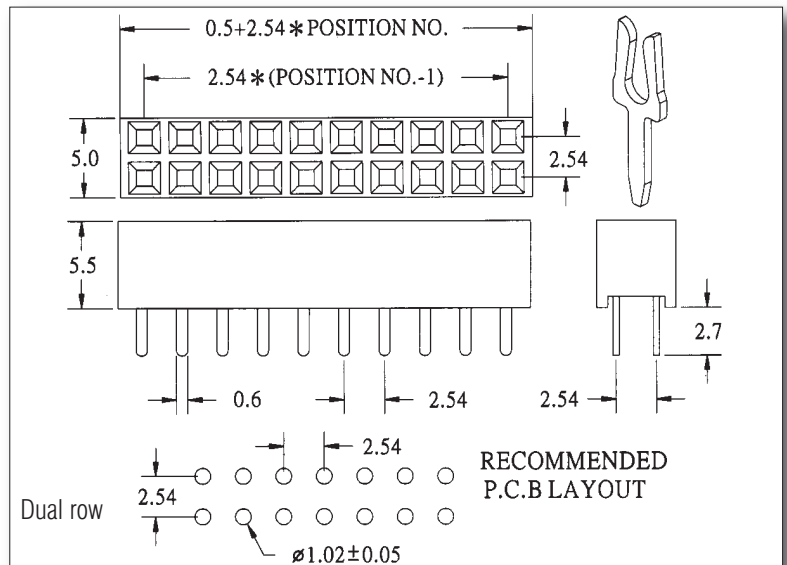
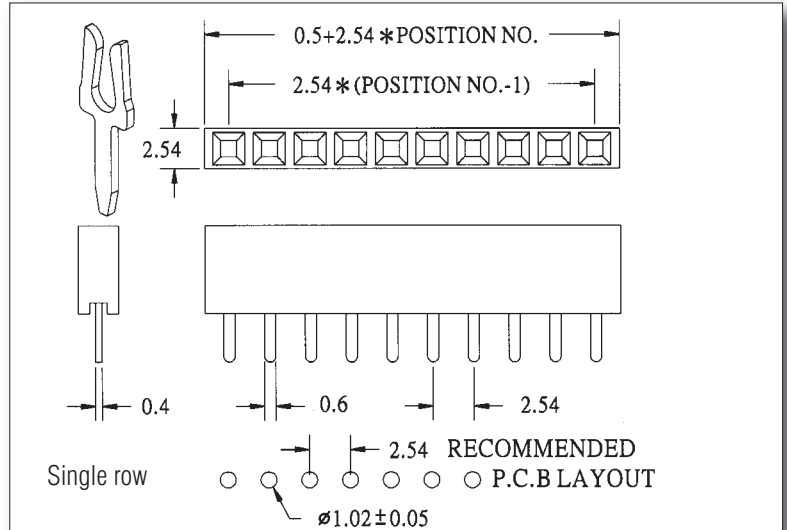


2.54mm Pitch Through Board Single & Dual Row 5.50mm Profile PCB Socket
B04-YxXX-BG1-G Series

Single & dual row available - 5.50mm PCB profile
Gold plated contacts and PCB tails
Mates with most Toby 2.54mm pitch pin headers

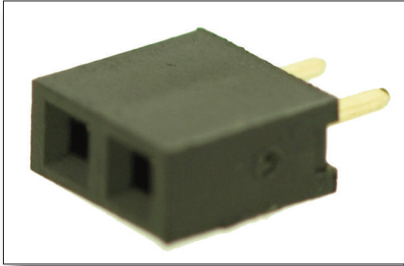

Ordering Information

B04 - Y x XX-BG1-G

1 2

Option 1 (Y) Number of rows
1 = Single row 2 = Dual row

Option 2 (XX) Number of contacts
Single Row -
(1x01) 01 to (1x40) 40 pos.
Dual Row - 2x02 to 2x40 pos.

Specification for B04-YxXX-BG1-G Series

Insulator Material:	Black PBT UL94V-0
Contact Material:	Phosphor Bronze
Contact Plating:	Gold flash plated contacts
PCB Contact Plating:	Gold flash
Current Rating:	1 Amp
DWV:	500V AC for 1 minute
Insulation Resistance:	3000 M Ω min.
Contact Resistance:	30 m Ω Max.
Operating Temperature:	-40°C to +105°C