

2.54mm Pitch Single Row Though Board Custom Length PCB Spacers



VBSS-1x40-030-xxx-030 SERIES

2.54mm Pitch Custom PCB Spacers from 5.1mm to 34mm Board Spacing




Gold Flash Plated Pins

1x40 Positions As Standard

Modified & Cut Parts Available On Request

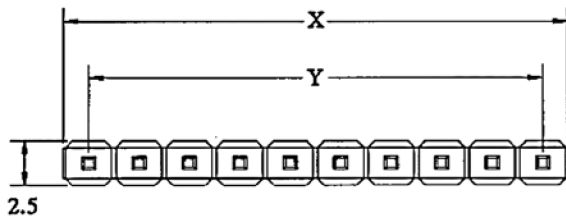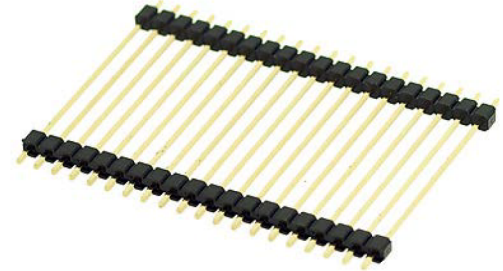

X	2.54*POSITION NO.
Y	2.54*(POSITION. NO.-1)

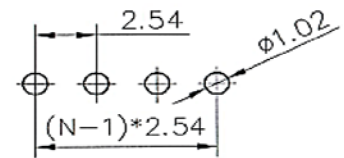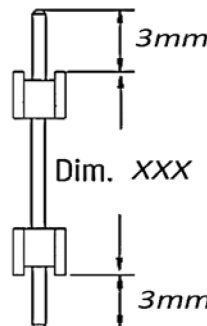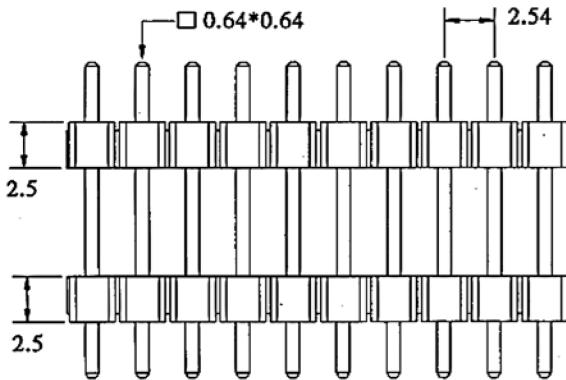

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Ordering Information for VBSS-1x40-030-xxx-030

VBSS-1x40*-030-xxx-030

1

OPTION 1 (xxx) = BOARD SPACE IN MM

051 (5.1mm) ~ 340 (34mm) - See Table

*Cut strip available on request – ie. -1x10- (10 positions)
(certain sizes maybe subject to MOQ)

Specification for VBSS Series

Contact Material:	Copper Alloy
Contact Plating:	Full Gold Flash
Body:	Thermoplastic UL94V-0
Contact Resistance:	50mΩ Max.
DWV:	600V AC(rms) for 1 Minute.
Insulation Resistance:	1000MΩ Min.
Temperature Range:	-40°C ~ +105°C
Current Rating:	1.5 Amp.

Part Number	Contact pin	PCB Spacing	Solder Tail
VBSS-1x40-030-051-030	3mm	5.1mm	3mm
VBSS-1x40-030-075-030	3mm	7.5mm	3mm
VBSS-1x40-030-090-030	3mm	9mm	3mm
VBSS-1x40-030-110-030	3mm	11mm	3mm
VBSS-1x40-030-125-030	3mm	12.5mm	3mm
VBSS-1x40-030-140-030	3mm	14mm	3mm
VBSS-1x40-030-145-030	3mm	14.5mm	3mm
VBSS-1x40-030-155-030	3mm	15.5mm	3mm
VBSS-1x40-030-175-030	3mm	17.5mm	3mm
VBSS-1x40-030-205-030	3mm	20.5mm	3mm
VBSS-1x40-030-225-030	3mm	22.5mm	3mm
VBSS-1x40-030-255-030	3mm	25.5mm	3mm
VBSS-1x40-030-280-030	3mm	28mm	3mm
VBSS-1x40-030-305-030	3mm	30.5mm	3mm
VBSS-1x40-030-315-030	3mm	31.5mm	3mm
VBSS-1x40-030-340-030	3mm	34mm	3mm