

2.54mm Pitch Dual Row Though Board Custom Length PCB Spacers


VBSD-2x40-030-xxx-030 SERIES

2.54mm Pitch Custom PCB Spacers from 5mm to 34mm Board Spacing

Gold Flash Plated Pins

2x40 Positions As Standard

Modified & Cut Parts Available On Request

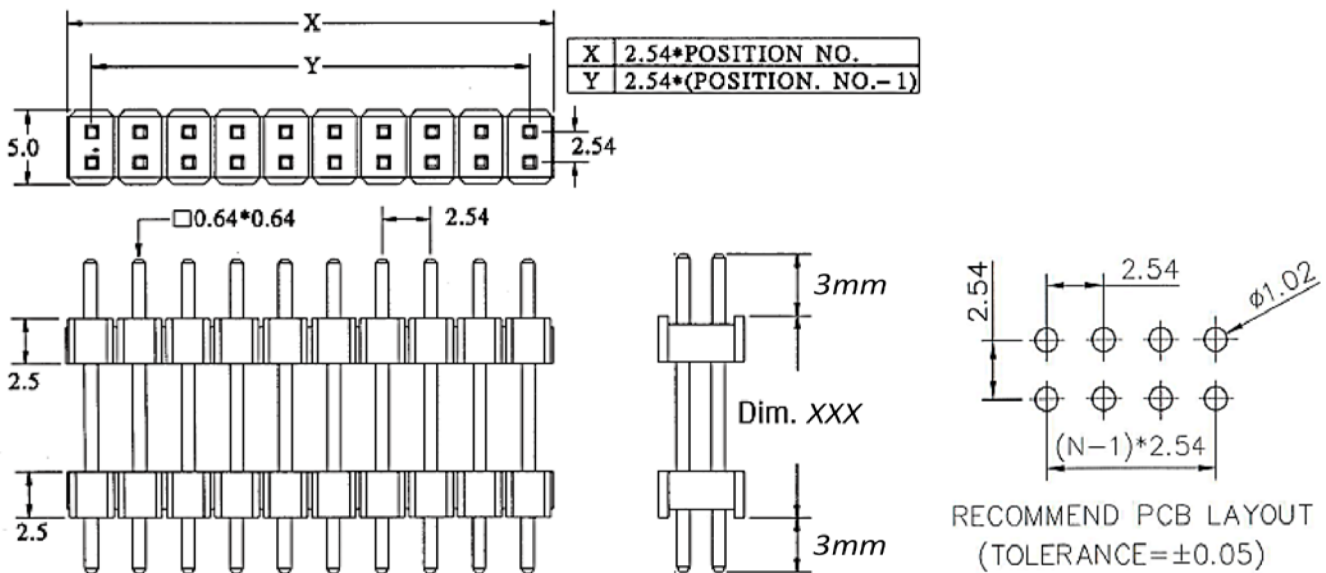

Ordering Information for VBSD-2x40-030-xxx-030

VBSD-2x40*-030-xxx-030

1

OPTION 1 (xxx) = BOARD SPACE IN MM

050 (5MM) ~ 340 (34MM) - See Table

*Cut strip available on request – ie. -2x10- (20 positions)
(certain sizes maybe subject to MOQ)

Specification for VBSD Series

Contact Material: Copper Alloy
Contact Plating: Full Gold Flash
Body: Thermoplastic UL94V-0
Contact Resistance: 50mΩ Max.
DWV: 600V AC(rms) for 1 Minute.
Insulation Resistance: 1000MΩ Min.
Temperature Range: -40°C ~ +105°C
Current Rating: 1.5 Amp.

Part Number	Contact pin	PCB Spacing	Solder Tail
VBSD-2x40-030-050-030	3mm	5mm	3mm
VBSD-2x40-030-075-030	3mm	7.5mm	3mm
VBSD-2x40-030-090-030	3mm	9mm	3mm
VBSD-2x40-030-110-030	3mm	11mm	3mm
VBSD-2x40-030-125-030	3mm	12.5mm	3mm
VBSD-2x40-030-140-030	3mm	14mm	3mm
VBSD-2x40-030-145-030	3mm	14.5mm	3mm
VBSD-2x40-030-165-030	3mm	16.5mm	3mm
VBSD-2x40-030-175-030	3mm	17.5mm	3mm
VBSD-2x40-030-205-030	3mm	20.5mm	3mm
VBSD-2x40-030-255-030	3mm	25.5mm	3mm
VBSD-2x40-030-305-030	3mm	30.5mm	3mm
VBSD-2x40-030-340-030	3mm	34mm	3mm