

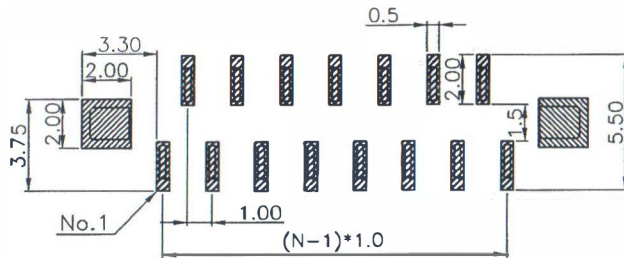
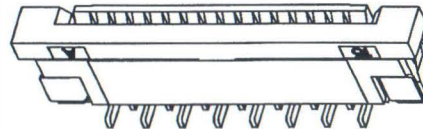
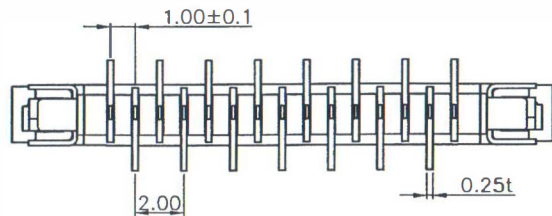



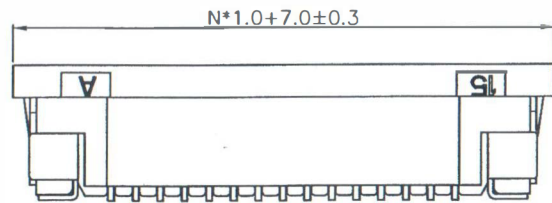

N=No. OF CONTACTS

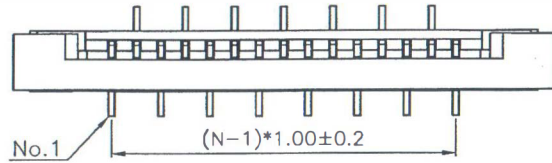

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/16'	~	

NOTES:

1. MATERIAL
 - 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
 - 1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
 - 2.1 TEMPERATURE:-25°C ~ +85°C.
 - 2.2 CONTACT RESISTANCE:30mΩ max.
 - 2.3 INSULATION RESISTANCE:100MΩ min.
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 100V PER MINUTE.

3. PRODUCT NUMBER CODE:

FFC1 - **xx** - VSM -TR

1

Option 1 (**xx**) Number of Positions:
~04 to 40

Please note - some sizes may be subject to MOQ

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	⊕ - ⊖	TITLE	1.0mm FPC
X. ±0.60	X. ±5°	UNITS	mm		ZIF V/T SMT TYPE H=5.5mm
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	FFC1-xx-VSM-TR
.XX ±0.25	.XX ±2°				
DRAWING TYPE	CUSTOMER				
SCALE	1:1 SHEET 1 OF 1				
DRAWING NO.	C- 18-XXXXXX-A				