

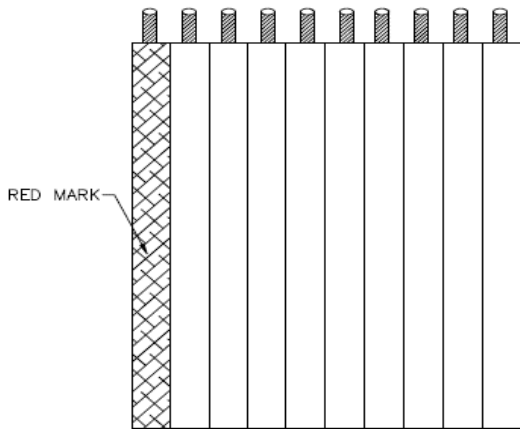


1mm Pitch Value Grey IDC Flat Ribbon Cable

VFC2-xx-305-G Series

RoHS Compliant – Grey with Red Polarizing Stripe
UL2651 Style UL Approved Cable

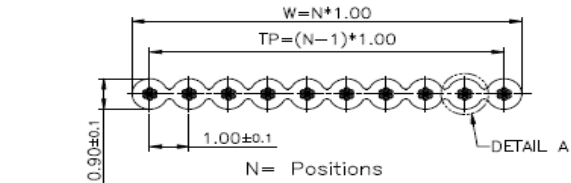

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	9.00	10.00	±0.30	∅0.100<0.397
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	



Ordering Information:

VFC2-xx-305-G

1

Option 1 (xx) = No. of Standard Positions

10, 14, 16, 20, 24, 26
34, 40, 44, 50, 60, 64

Mates with Toby items:

A05, A05b, A11a 2mm IDC connectors

NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 30AWG
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.