

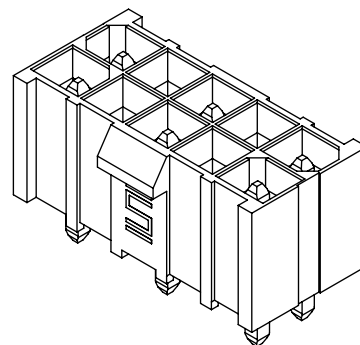
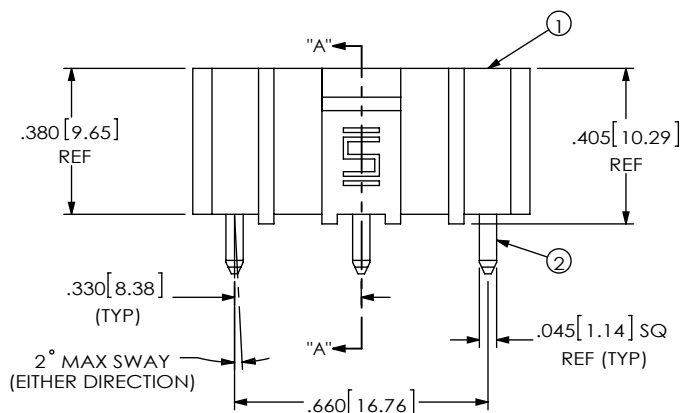


REVISION


| | | |
|-------------------------|------------|---------|
| A | CW | P MASON |
| 9/22/2014 | ECN-236471 | |
| RELEASE FOR PRODUCTION. | | |

NOTES:

1. REMOVE POS 02, 04, 07 & 09 NOT AVAILABLE AS STANDARD.
2. [Cx-xx] → REPRESENTS A CRITICAL DIMENSION.
3. MAXIMUM BURR ALLOWANCE: .0015[0.038].
4. MINIMUM TERMINAL RETENTION: 1 LB.
5. MAXIMUM HEIGHT VARIATION BETWEEN PINS: .005[0.13].
6. ALL PIN TO PIN DIMENSIONS TO BE MEASURED FROM TIP TO TIP.
7. MAXIMUM CUT FLASH: .005[0.13].
8. PARTS TO BE PACKAGED IN TUBES.

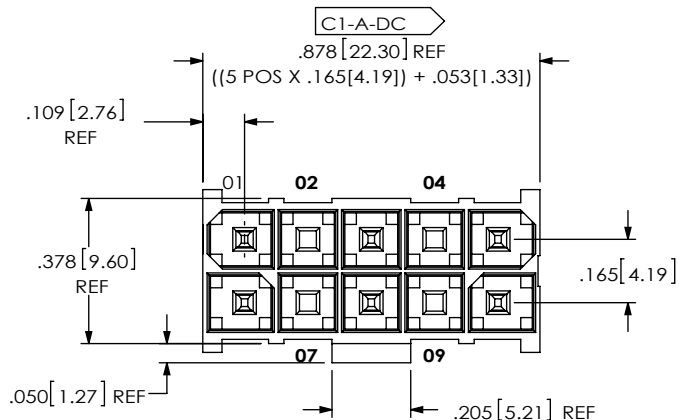

PACKAGING VIEW

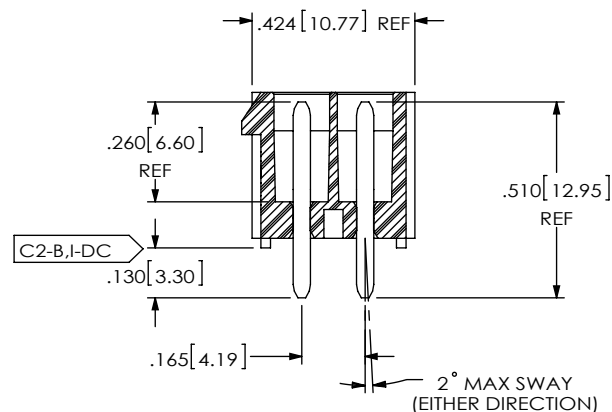

SECTION "A"- "A"

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS ANGLES
 .XX: ±.01 2°
 .XXX: ±.005
 .XXXX: ±.0020

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



e-Mail: sales@toby.co.uk

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

PLATING:
 ENTIRE PIN: .000200 REF TIN OVER .000050 MIN NICKEL

DESCRIPTION:
 MODIFIED DOUBLE ROW TERMINAL ASM

DWG. NO.
 ASP-158789-01

BY: CANDY W 09/22/2014 SHEET 1 OF 1



| ITEM NO. | PART NUMBER | QUANTITY | MATERIAL |
|----------|----------------|----------|----------------------------|
| 1 | IPBT-05-D | 1.0000 | ZENITE 6130L, COLOR: BLACK |
| 2 | T-1S55-01-T-2 | 6.0000 | C197 X-SPRING HARD |
| 3 | PT-1-24-01-112 | .04000 | ANTI-STATIC PVC |
| 4 | TP-28 | .08000 | THERMOPLASTIC RUBBER |