




(1.27 mm) .050"

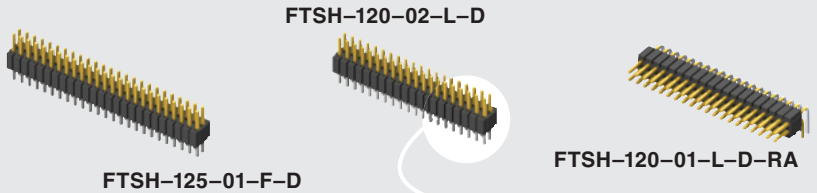

FTSH SERIES

THROUGH-HOLE MICRO HEADER

SPECIFICATIONS

For complete specifications see www.samtec.com/FTSH

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over 50µ" (1.27 µm) Ni

Current Rating (FTSH/CLP):

3.3 A per pin (1 pin powered per row)

Operating Temp Range:

-55°C to +125°C

RoHS Compliant:

Yes

Processing:


Lead-Free Solderable:

Yes

Mates with:

FFSD, FFTP, CLP, FLE

Impedance matched for high speed applications (Mated with CLP Series)

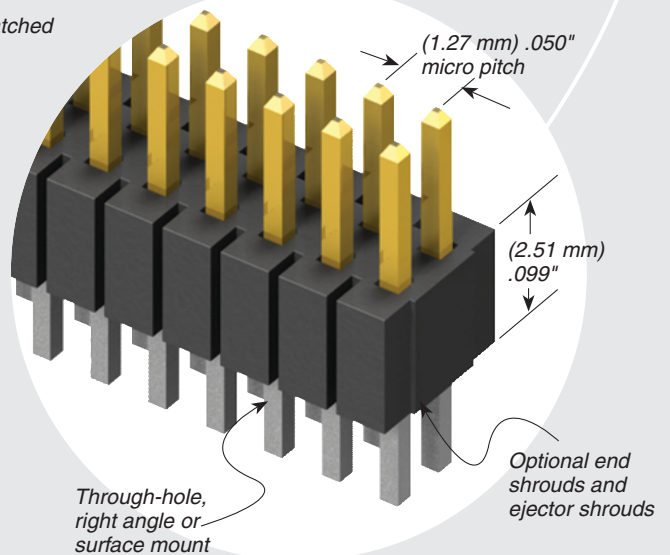

Mates with socket strips or IDC cable

Through-hole, right angle or surface mount


RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



LOCKING CLIP

For single mating cycle with the FFSD.



Specify -LC after tail option. Lead Style -01 and 10 pins/row minimum. 5-9 pins/row not available in combination with keying shroud (-K).

ALSO AVAILABLE (MOQ Required)

- Molded Pick & Place pads
 - Other platings
- Contact Samtec.

Note: See SFM/TFM for positive alignment feature.

Note: Some sizes, styles and options are non-standard, non-returnable.

FTSH	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION	TAIL OPTION	OTHER OPTIONS
02 thru 50			Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail -L = 10µ" (0.25 µm) Gold on post, Matte Tin on tail		Leave blank for Right Angle -“XXX” = Polarized Position (Specify position of omitted pin) (Not available with -EX options)	Leave blank for straight tail -RA = Right Angle	-ES = End Shroud (Style -02 & -03) 9 pins/row min. -EP = End Shroud with Guide Post (Style -02 & -03) 9 pins/row min. -EL = End Shroud with Board Lock (Style -02 & -03) 9 pins/row min. -EJ = Ejector Shroud (Style -01 only) 10 pins/row min. 25 pins/row max. -RA not available -K = Keying Shroud for mating with FFSD (Style -01 only, 05, 08, 10, 13, 17, 20 & 25 pins/row only and 13, 17, 20 & 25 only with -EJ option)

LEAD STYLE	A	MATES WITH	OPTION	Z
-01	(3.05) .120	FFSD, CLP-DH	-ES	(1.55) .061
-02	(1.91) .075	FLE	-EJ	(15.77) .621
-03	(1.65) .065	CLP-D	-EP	(5.87) .231
-04	(3.81) .150	N/A	-EL	(6.53) .257