

# ExaMAX<sup>®</sup>

EBCL-4-10

EBCL-6-12



EBCL SERIES

## VERTICAL LATCHING SHROUD

### SPECIFICATIONS

Insulator Material:  
Nylon  
RoHS Compliant:  
Yes

### APPLICATION

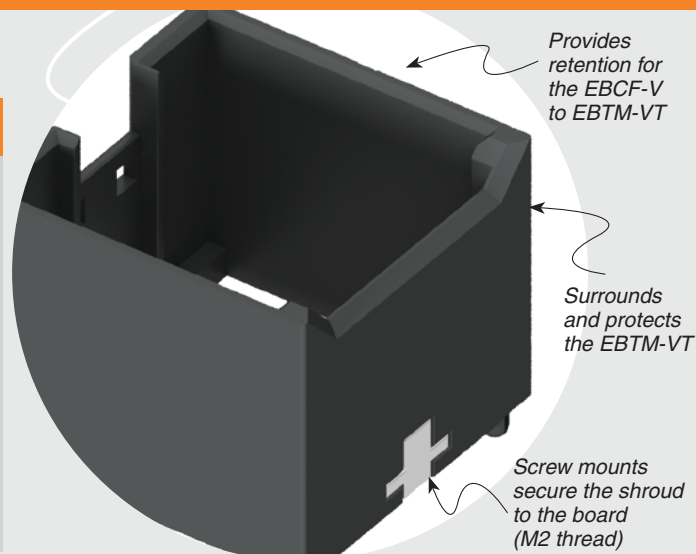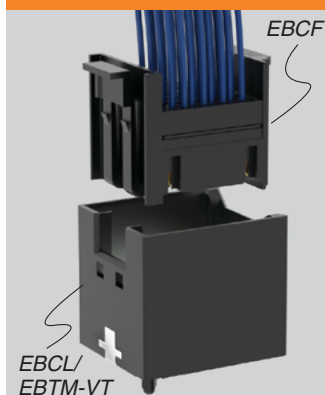

EBCL


NO. OF PAIRS

NO. OF COLUMNS

-4 = 4 Pairs


-6 = 6 Pairs

-06, -08, -10,  
-12  
(-6 pairs only)



NO. OF COLUMNS	A	B
-06	(22.40) .882	(18.66) .734
-08	(26.40) 1.039	(22.66) .892
-10	(30.40) 1.197	(26.66) 1.050
-12	(34.40) 1.354	(30.66) 1.207

NO. OF PAIRS	C	D	E
-4	(26.20) 1.031	(11.45) .451	(21.50) .846
-6	(33.40) 1.315	(15.05) .593	(28.70) 1.130

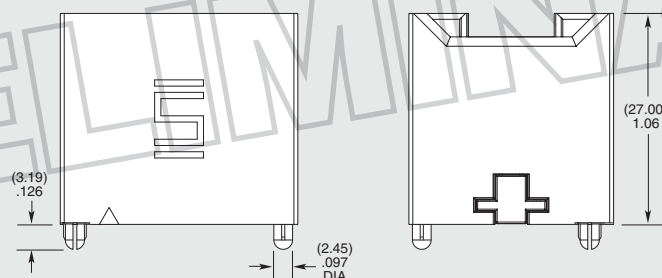

EBCL-4-10 SHOWN

**Notes:**  
ExaMAX<sup>®</sup> is a registered trademark of AFCI.

Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

All parts within this catalog are built to Samtec's specifications.  
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.