
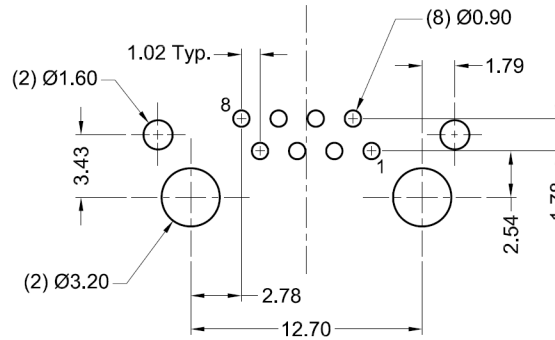


Panel Cutout



Recommended PCB Layout
(Top View)

Materials and Finish

Housing Material: High Temperature Thermoplastic, UL 94V-0 Rated, Color: Black

Shield: Copper Alloy, Nickel Plated

Contact Material:
Phosphor Bronze

Plating Options:

Standard: Nickel Underplating,
Gold Flash Plating on Contact Area,
Gold Flash Plated on Solder Area

50 Option: Nickel Underplating,
Contact Area Plated with 50u" Gold
to Comply with ANSI/TIA-1096-A,
Gold Flash Plated on Solder Area

Electrical Characteristics

Rated Current: 1.5A

Rated Voltage: 125V DC

Insulation Resistance:
500 Megohms Min.

Contact Resistance:
20 milliohms Max.

Dielectric Withstanding Voltage:
1000V for 1 Minute

Part Number	Contact Area Plating Finish
GWX-S-88	Gold Flash (standard)
GWX-S-88-50	50u" Gold (50 option)



Tolerances
X.X ± 0.35
X.XX ± 0.25
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A5	01/12/11	ECO #11-004	S. Vien	H. MA	R. Aguirre	9/19/05
A6	06/11/12	ECO #12-031	S. Vien	P. DalCanto		
A7	10/05/12	ECO #12-050	S. Vien	P. DalCanto		
A8	11/13/12	ECO #12-062	S. Vien	P. DalCanto		
A9	02/19/14	ECO #14-009	D. Gih	H. MA		
A10	04/16/15	Update Drawing View	C. Kelleher	H. MA		

GWX-S-88

Modular Jack, Right Angle, RoHS Compliant

Thru-Hole, Inverted, Fully Shielded

