


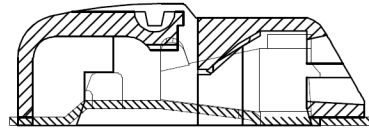
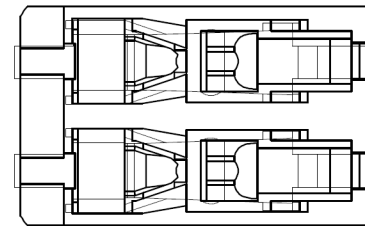
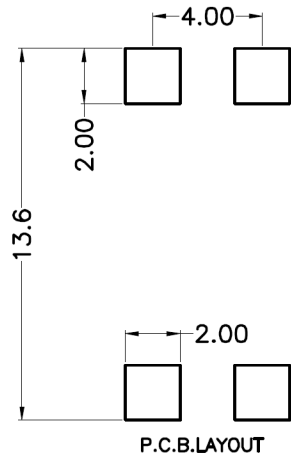



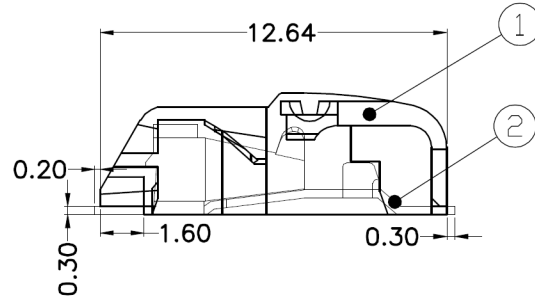

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2018/4/9	ZHANG	JIN



SECTION A-A

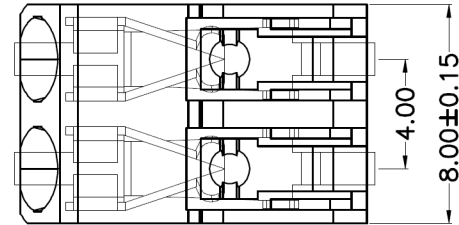

- Material
 - ①Button : PA4T, UL94V-0
 - ②Pin header : Phosphor bronze, Tin plated
- Electrical

	UL	IEC
Rated voltage :	150V	300V
Rated current :	7A	9A
Insulation resistance:	500MΩ/DC500V	
Withstanding Voltage :	AC1500V/1min	
Wire range:	24-18AWG 0.75mm ²	
- Mechanical
 - Operating temperature: -30℃ ~ +105℃
 - Soldering temperature: 250℃ ± 5/5sec
 - Strip length: 7mm

Order Information:

VTBL-151-4-xP
1

1. x = Number of positions (~2 - 10 positions)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.5	X'	±5'	UNITS	mm	VTBL-151-4-xP	
.X	±0.3	.X'	±3'	SHEET SIZE	A4		
.XX	±0.1	.XX'	±1'			SERIES	VTBL-151
DRAWING TYPE		CUSTOMER		Valcon 4mm Pitch, Surface Mount Terminal Block			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		XP0012016-xxxx					