


STX-3120 Series - 3.5mm Audio Jack All Plastic PCB Mount


Kycon CSA Approval File No LR78160

Two schematic types available

Available PC99 colours are: Black, Orange, Lime Green, Pink & Blue

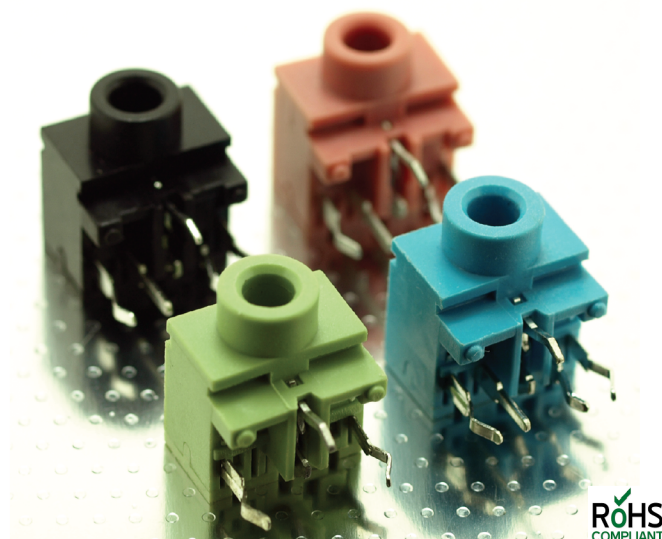

ROHS
COMPLIANT

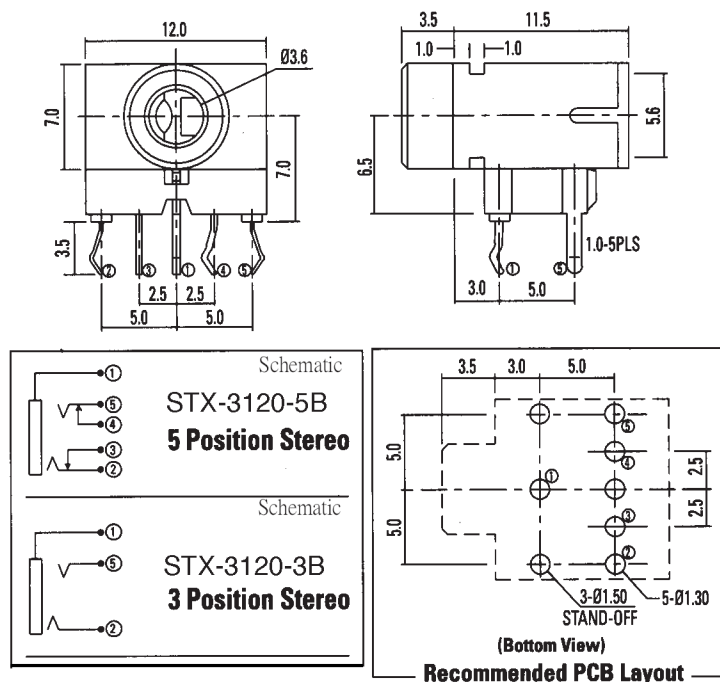

Ordering Information for STX-3120-X-B-XXXX

1 2

Option 1

Pin Type

3 = 3 Pin

5 = 5 Pin

Option 2

(PC99)Colour

Black = Leave Blank (Standard)

157C = Orange, 284C = Blue

577C = Lime, 701C = Pink

Note - some colours may be subject to MOQ

Supplied as standard with back plate (-B-)

Specification for STX-3120 Series

Insulator Material:	PBT Thermoplastic UL94V-0
Contact Material:	Copper Alloy
Contact Plating:	Tin over Nickel
DWV:	500V AC for 1 minute
Insulation Resistance:	100M Ω min. @ 500V DC
Contact Resistance:	50m Ω Max. (Before durability test) 100M Ω max. (After durability test)
Operating Temperature:	-25°C to +85°C
Durability:	5000 mating cycles
Insertion Force:	0.4kg to 3.0kg
Extraction Force:	0.3kg to 3.0kg
Approvals:	CSA/NRTL File No LR78160