



SPECIFICATIONS

1. DVI
- 1.1 Voltage: 40 VAC(RMS) Max.
- 1.2 Current Rating: 1.5 Ampere per Contact
- 1.3 Contact Resistance(UPPER): 30 Milliohms Max.
Contact Resistance(LOWER): 20 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500V DC(RMS)
- 1.6 Total Mating Force: 4.5 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C


NOTES

1. MATERIAL:
Housing(UPPER):PBT, UL 94V-0, Color:Ivory.
Housing(LOWER):PBT, UL 94V-0, Color:Ivory.
Terminal:Copper Alloy.
Shell:SPCC.
Shield:Stainless Steel.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
Screw:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
Screw:Nickel Plated.
3. This Product is RoHs Compliance Product.

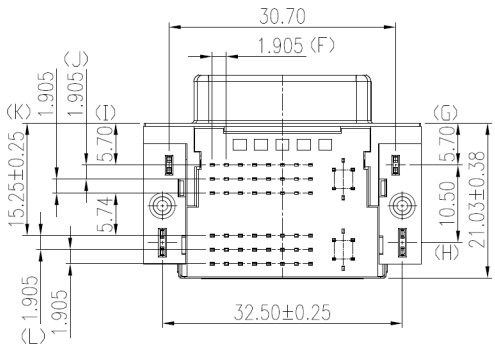


Ordering Information:

Part Number: DVI-DP-29-C-G-HN-4-FS

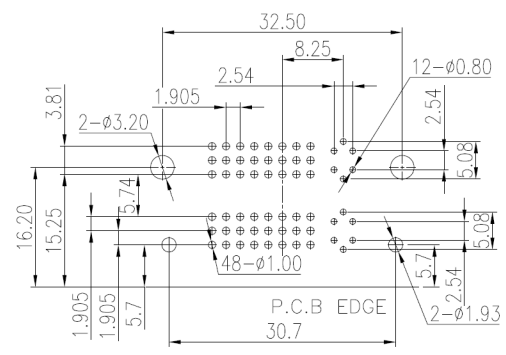

RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(L)



A0	An Issue.		2020.01.07	
REV.	CONTENTS		DATE	
	Drawn	Shao Jianfeng		
	Designed	He Wei		
	Approval	Lee Jun De		
	Scale	1:1	Size	A4
	SHEET	1	Units	mm

the **vital** component

Title: DVIW SERIES
DVI-I / DVI-I FEMALE RIGHT ANGLE

File NO. C-ED-B-DVIW-289
Drawing NO. DVIWV4V4C1X2MB41N7