







Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

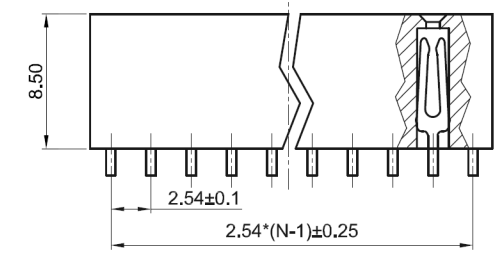


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/25/05'	~	LJC 09/25/05'
B	DRAWING UPDATE	LL 11/29/06'	~	LJC 11/29/06'
C	DRAWING UPDATE	JLZ 02/13/19'	~	

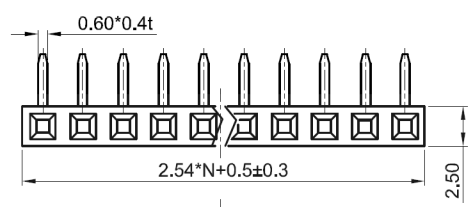

SINGLE ROW
N:NUMBER OF CONTACTS

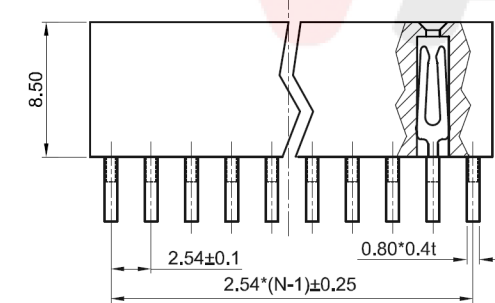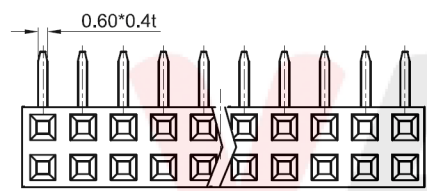

DOUBLE ROW
N:NUMBER OF CONTACTS/2

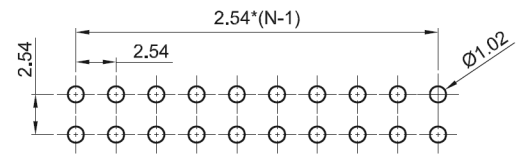

RECOMMEND PCB LAYOUT
(TOLERANCE ±0.05)

- Notes:
Specifications:
1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms)
For 1 Minute.
4. Current Rating:3A.
5. Voltage Rating:250V AC rms.
6. Temperature: -40°C~+105°C.

- Materials:
1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: PBT,Black,UL94-V0.
- Product Number Code:
V07 - X X X - 1
- CONTACT PLATING
GF: FULL GOLD FLASH
 - MOUNTING TYPE
SR: R/A TYPE
 - No.OF CONTACTS: eg. 2x05 = 10 contacts
1x02 ~ 1x40
2x02 ~ 2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 2.54MM R/A TYPE				
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4				
.X	±0.38	.X	±3°			SERIES					
.XX	±0.25	.XX	±2°			V07 Series (Single & Dual Row)					
DRAWING TYPE		CUSTOMER									
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.											