NO : XXXXXXXX

**RoHS COMPLIANT**

PAPER : A4

| REV. | DATE | DESCRIPTION |
|---|---|---|
| A | 02/19/110 | RELEASED |
| B | XX/XX/XX | |
| C | XX/XX/XX | |

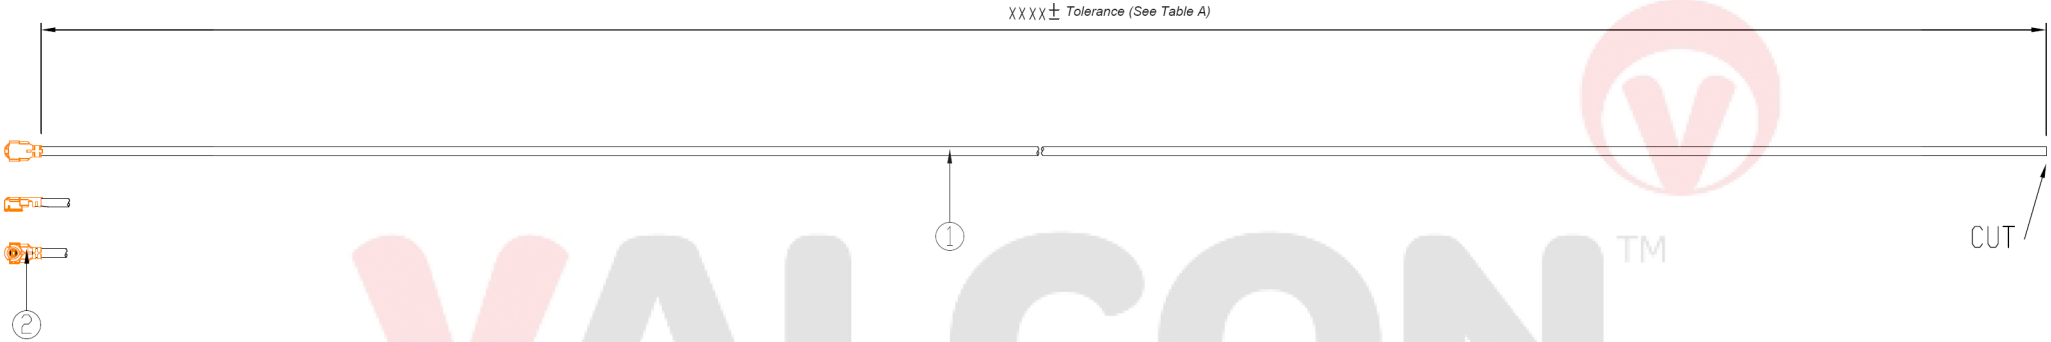


MATERIAL LIST

1. RF COAXIAL CABLE Ø1.32mm; COLOR : GRAY (x1)
2. MICRO COAXIAL CONNECTOR (I-PEX MHF SERIES) (x1)

NOTE FOR INSPECTION :

*. SURFACE (NO BROKEN IN WIRE, NO OXIDIZE IN CONNECTOR, NO EXPOSE IN ASSEMBLED POINT, NO BROKEN IN CORD, NO TAKE OFF WHEN PULLING FOR SHRINK TUBE, TIN SHOULD BE UNIFORM.)
*. SIZE (LENGTH OF OVERALL, STRIP, INSULATOR, BRAID & SHRINK TUBE.)
*. DIAMETER OF WIRE
*. SHORT TESTING

REMARK :

*. RF CABLE TYPE Ø1.32mm
*. OVERALL CABLE LENGTH IS XXXX mm
*. IMPEDANCE 50ohm
*. RELATIVE DIRECTION BETWEEN CONNECTORS ARE SHOWN
*. RoHS COMPLIANT
*. THIS DRAWING IS FOR REFERENCE ONLY

VALCON™
QUALITY VALUE COMMITMENT

TOBY
www.toby.co.uk

*Table A*

| Overall Assembly Length in mm | Tolerance ± in mm |
|---|---|
| 0-350 | ~ 5 |
| 351-700 | ~ 10 |
| 700-1050 | ~ 15 |

**Ordering Information:**
TRFC-IPEX-OE-132-XXXXMM
Specify XXXX in mm for overall assembly length

| | | | |
|---|---|---|---|
| 一般公差 TOLERANCE | UNLESS OTHERWISE SPECIFIED<br>2 PLACE DECIMAL 0.00 ± 0.25mm<br>1 PLACE DECIMAL 0.0 ± 0.35mm<br>0 PLACE DECIMAL 0 ± 0.50mm<br>ANGULAR ± 15 MINUTES (0.25°) | 圖名 (NAME) | COAXIAL CABLE (IPEX MHF FOR Ø1.32mm) |
| | | 繪圖 (DRAW) | SONG 02/19/110 |
| | | 審核 (CH"K) | |
| | | 客戶 (CUSTOMER) | |
| 投影法 PROJECTION | 第三角 | 比例 (SCALE) FIT | 單位 (UNIT) mm 版本 (REV.) A |
| | | 圖號 (NO) | TRFC-IPEX-OE-132-XXXXMM |