

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 07/17/12'		

NOTES:

1. SPECIFICATIONS:

- 1.1 CONTACT CURRENT RATING: 1A MAX. PER PIN.
- 1.2 CONTACT RESISTANCE: 30 mΩ MAX.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 1.4 INSULATION RESISTANCE: 1000 MΩ MIN.
- 1.5 OPERATING TEMPERATURE: -40°C~+105°C.

2. PRODUCT NUMBER CODE:

MDP-02x-1-R-V2

x = Number of pins (as per Table A)

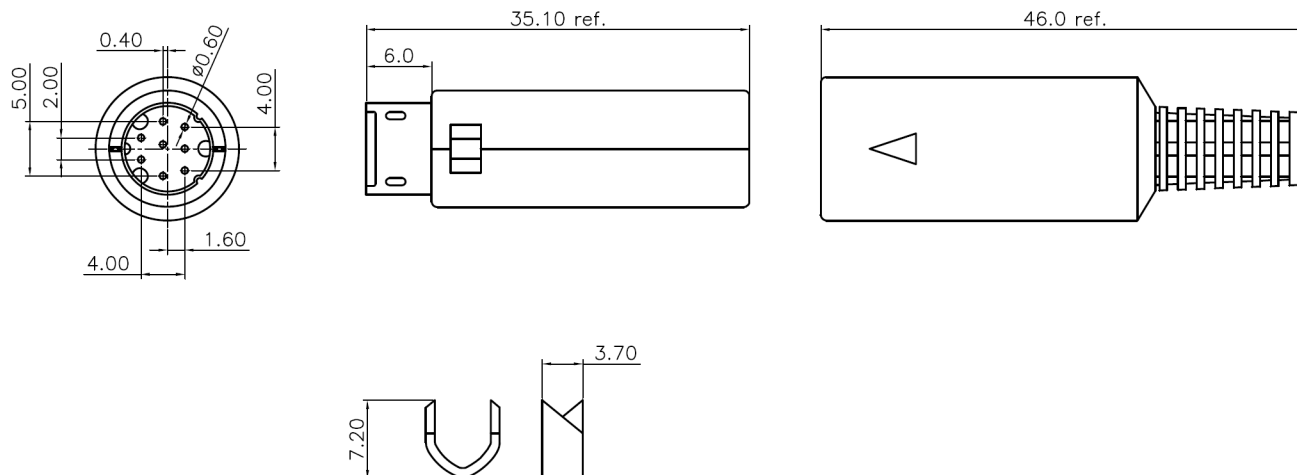


Table A

3 PIN	4 PIN	5 PIN	6 PIN	7 PIN	8 PIN

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE			
X. ±0.60		X. ±5°		UNITS	mm	MALE MINI DIN WITH SR TYPE			
.X ±0.38		.X ±3°		SHEET SIZE	A4	SERIES	MDP_V2 SERIES		
.XX ±0.25		.XX ±2°							
DRAWING TYPE		CUSTOMER		 www.toby.co.uk		Toby Electronics Ltd		W: www.toby.co.uk	
SCALE		1:1	SHFFT			1 OF 1	Beaumont Road, Banbury		E: sales@toby.co.uk
DRAWING NO.						Oxon		T: +44 (0)1295 271777	
						0X16 1TU		F: +44 (0)1295 271744	