

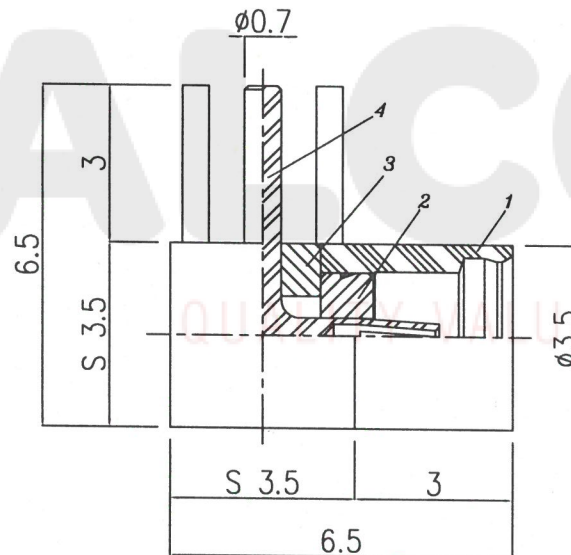






www.toby.co.uk

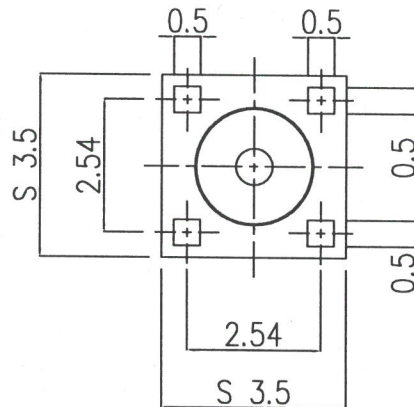

編號	13-P225-2B-ROHS	圖號	.\MMCX\13-P225-2B-ROHS			版次	A 版
ITEM NO.		DRAWING NO.				EDITION	
電鍍	GGT	日期	2006 年 03 月 21 日			製圖	Elva
PLATING		DATE				DRAWER	
描述	MMCX RIGHT ANGLE PCB MOUNT JACK RECEPTACLE	單位	mm	比例	7:1	設計	
DESCRIPTION		UNIT		SCALE		DESIGN	
		公差	0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm	認定		
			8-30mm ± 0.40mm	30-120mm ± 0.50mm	APPROVED		

NO	DESCRIPTION	Q'TY	ITEM NO.	MATERIAL	PLATING
1	BODY	1	13-P225-2B-ROHS	BRASS	GOLD
2	DIELECTRIC 1	1	T-020034	PTFE	-
3	DIELECTRIC 2	1	T-020028	PTFE	-
4	CENTER PIN	1	13-P225-2B	BERYLLIUM COPPER	GOLD

GGT: 1st G is Gold for body. 2nd G is Gold for pin.
3rd T is PTFE for insulation.

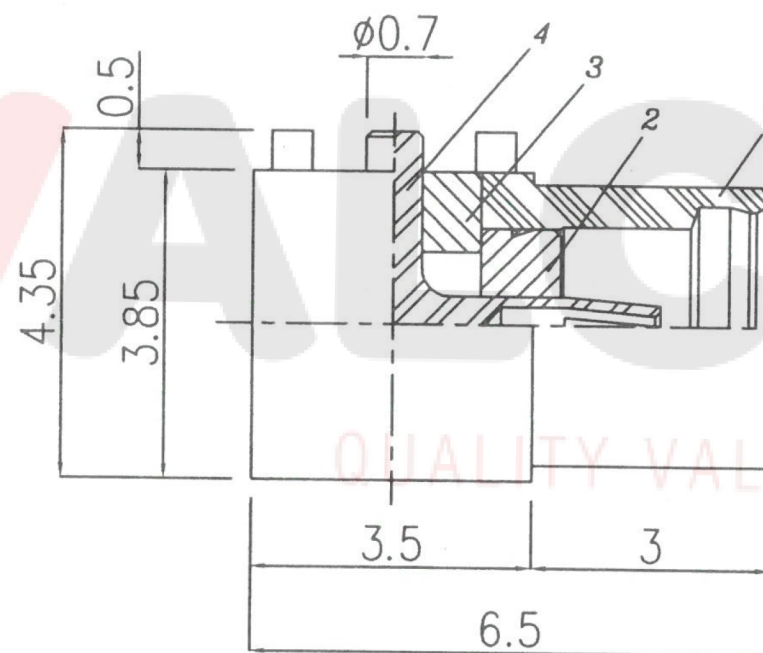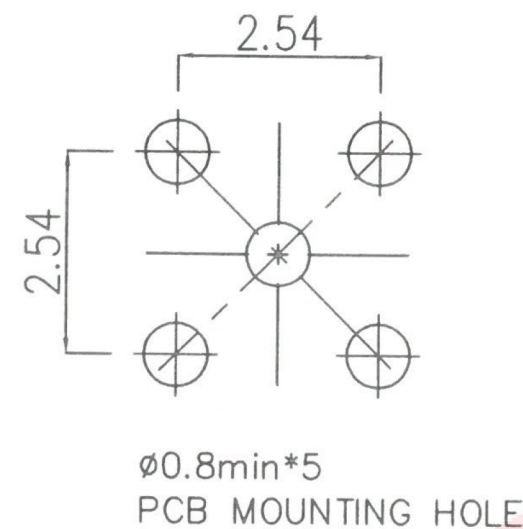

編號	13-P225-ROHS	圖號	.\MMCX\13-P225-ROHS			版次	A 版
ITEM NO.		DRAWING NO.				EDITION	
電鍍	GGT	日期	2006 年 03 月 21 日			製圖	Elva
PLATING		DATE				DRAWER	
描述	MMCX RIGHT ANGLE PCB MOUNT JACK RECEPTACLE	單位	mm	比例	8.2:1	設計	
		UNIT		SCALE		DESIGN	
DESCRIPTION		公差	0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm	認定	APPROVED	
			8-30mm ± 0.40mm	30-120mm ± 0.50mm			

NO	DESCRIPTION	Q'TY	ITEM NO.	MATERIAL	PLATING
1	BODY	1	13-P225-ROHS	BRASS	GOLD 3-5 μ " MIN.
2	DIELECTRIC 1	1	T-020034	PTFE	-
3	DIELECTRIC 2	1	T-020028	PTFE	-
4	CENTER PIN	1	13-P225	BERYLLIUM COPPER	GOLD 10 μ " MIN.

GGT: 1st G is Gold for body. 2nd G is Gold for pin.
3rd T is PTFE for insulation.