


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

Single Row
N: Number Of Contacts

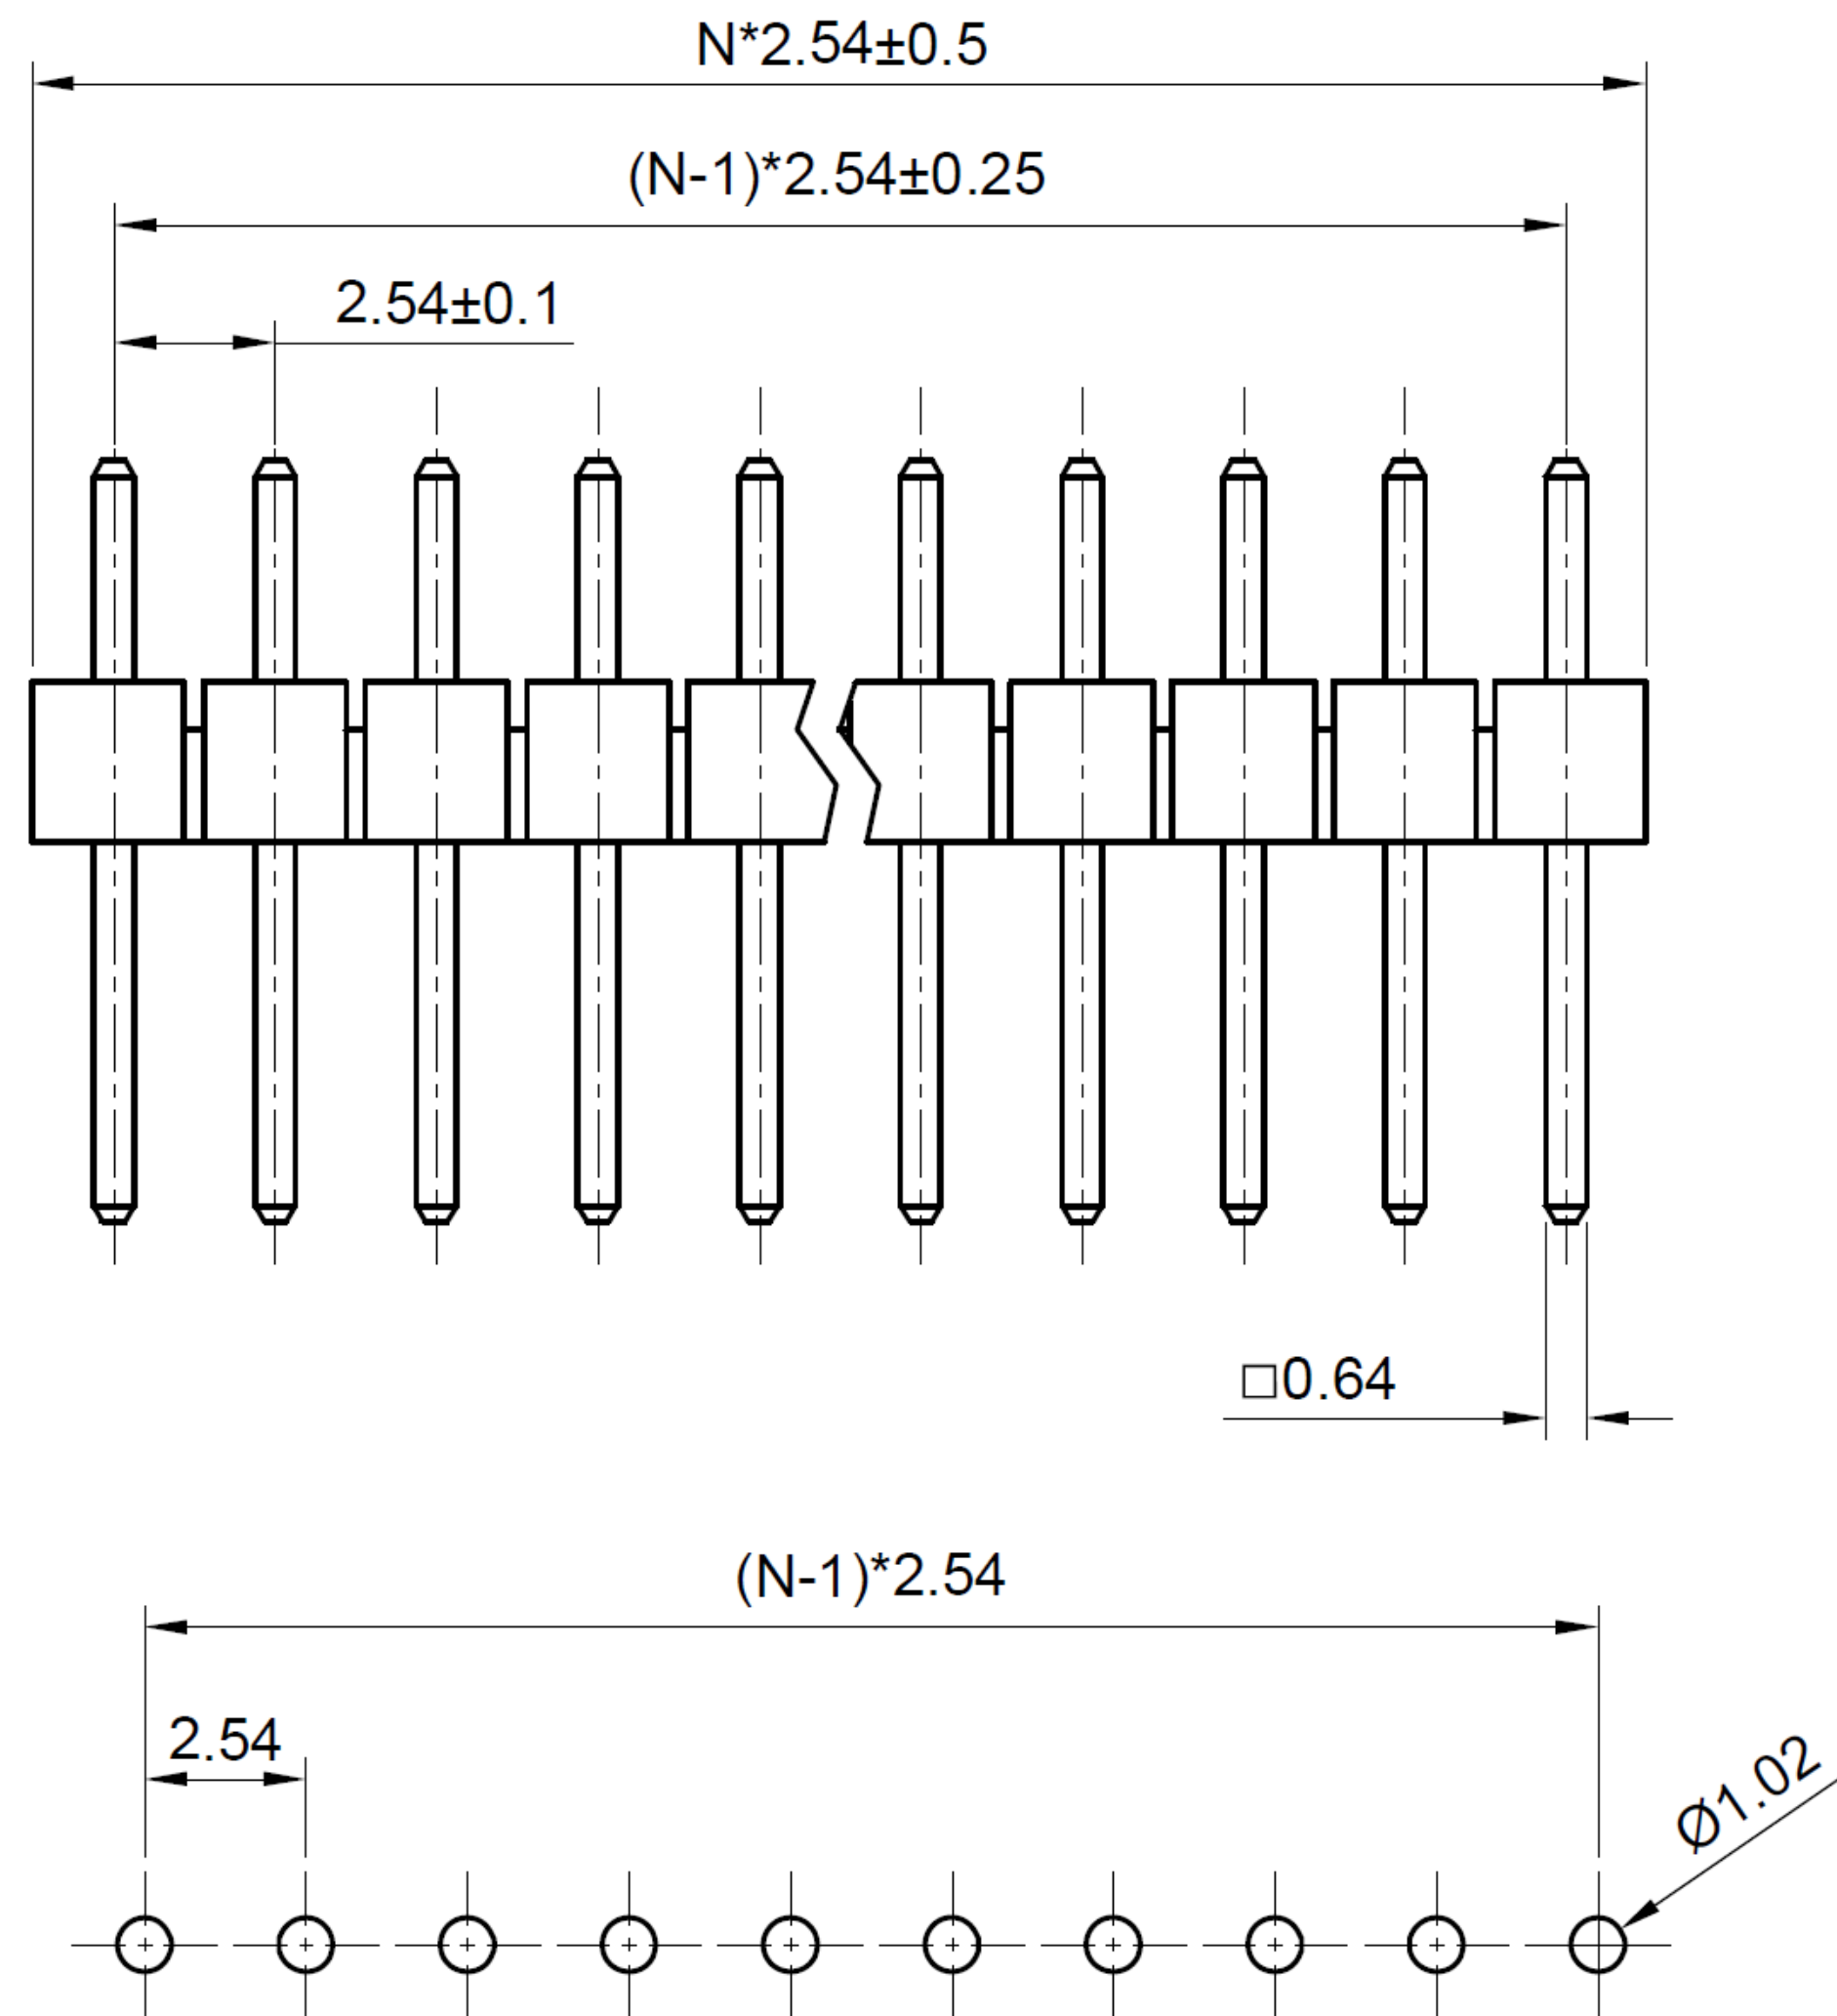

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/19/21'		
CSP PN: 0112;13;14 Released		R.C. 19/08/2021		J.M.P. 19/08/2021

Notes:

- Electrical Characteristics:
 - Contact Resistance: 20m ΩMax.
 - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000M ΩMin.
 - Current Rating: 3A.
 - Voltage Rating: 250V AC rms.
- Environment Characteristics:
 - Temperature: -40°C~+105°C.
- Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Full Gold Flash Plating Over Nickel.
 - Insulator Materials: PA-9T, Black, UL94-V0
- Product Number / Order Code:

CSP-xxx-01 = Customer Specific Product

PN: CSP-0112-01 = 3 Positions (See N: Number of Contacts)
 PN: CSP-0113-01 = 4 Positions (See N: Number of Contacts)
 PN: CSP-0114-01 = 5 Positions (See N: Number of Contacts)

Contact: sales@toby.co.uk for part code information

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Pin Header 9T Type Single Row	
X.	±0.60	X.	±5°	UNITS	mm	SERIES		
.X	±0.38	.X	±3°	SHEET SIZE		A4	Customer Specific Parts	
.XX	±0.25	.XX	±2°	Toby Electronics Ltd		W: www.toby.co.uk		
DRAWING TYPE		CUSTOMER		Beaumont Road		E: sales@toby.co.uk		
SCALE		1:1	SHEET	Banbury		T: +44 (0)1295 271777		
DRAWING NO.		CSP-0xxx-01-HTHS-9T		OX161TU		F: +44 (0)1295 271744		