


2.54mm Pitch Single Row Surface Mount Straight PCB Mount Header STHS-xxB1-R-060-0 Series

2.54mm Pitch - 6mm Contact Pin
Gold Flash Plated Contacts
From 1 to 40 Positions (B1 Footprint is Standard)

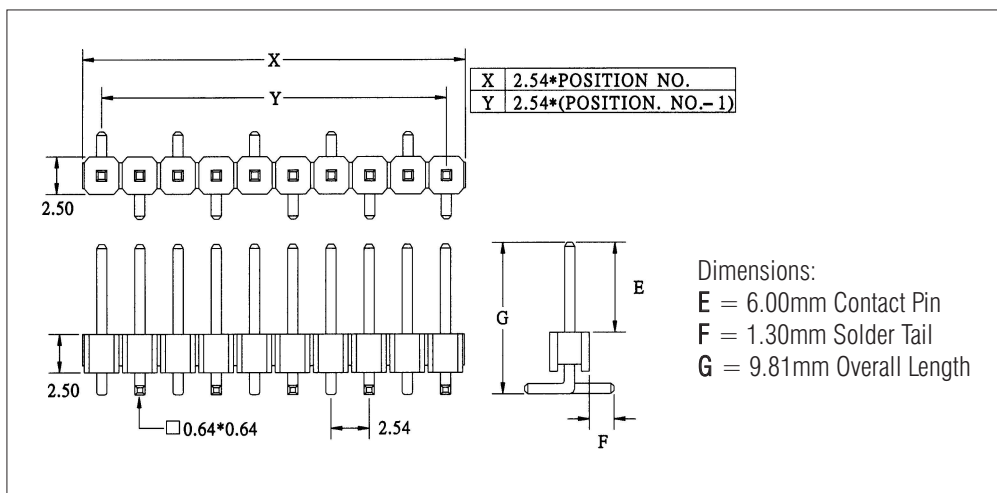

Specification for STHS-xxB1-R-060-0 Series

General:

Contact Resistance: 20mΩ MAX.
Insulation Resistance: 1000MΩ MIN.
DWV: 600V AC(RMS) for 1 Minute
Current Rating: 3A
Voltage Rating: 250V AC RMS
Temperature Ratings: -40°C to +105°C

Materials

Contact Material: Copper Alloy
Contact Plating: Gold Flash Plate over Nickel
Insulator Materials: High-Temp, Black, UL94V -0

Ordering Information for STHS-xxB1-R-060-0 Series

STHS - xxB1 - R - 060 - 0

1 2 3

- Option 1 (xx)** Total number of contacts
01 to 40
- Option 2** Contact pin length
060 = 6.00mm (Standard)
- Option 3** PCB Alignment Peg
0 = No Peg (Standard)
1 = Peg (MOQ may apply to this option)

Please note: Some lengths, styles & options are non-standard, non-returnable and may be subject to minimum order quantities.