


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

Cover

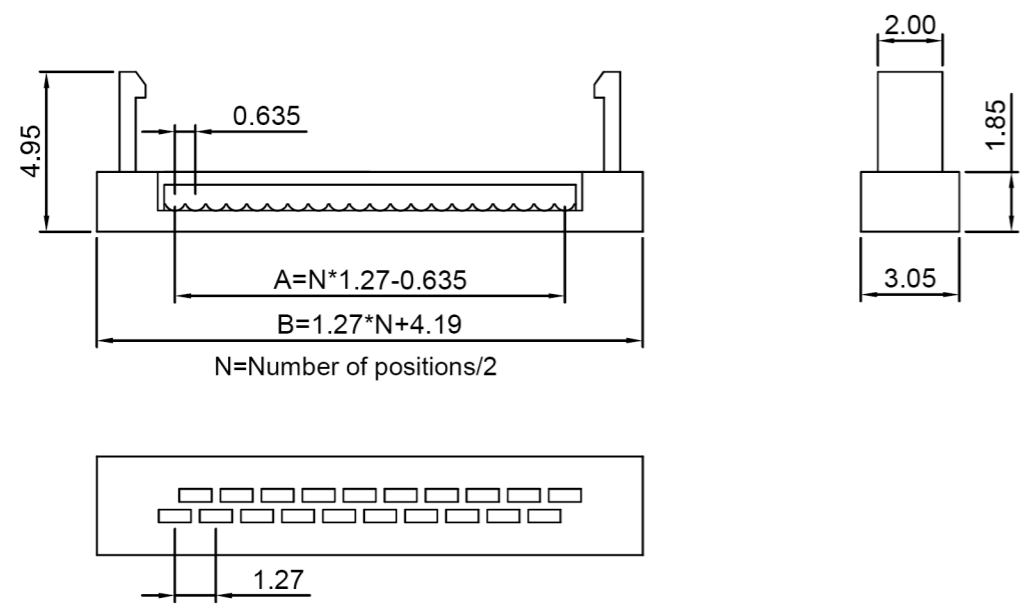

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	DRAWING UPDATE	JLZ 08/28/18'		



NOTES:

- Materials
 - 1.1 Insulator: Thermoplastic(UL 94V-0).
 - 1.2 Contact: Copper alloy.
 - 1.3 Contact Plating: Full Gold Flash
- Specification
 - 2.1 Temperature range: -40°C~+105°C.
 - 2.2 Contact resistance: 20m Ωmax.
 - 2.3 Insulation resistance: 1000M Ωmin.
 - 2.4 Dielectric withstanding voltage: AC 500V per minute.
- Packing: PVC Tray.
- Product number code:

V127 - S - xx - R1

Number of Positions:
06,08,10,12,14,16,20
22,24,26,30,34,40,44
50,60,68

Housing

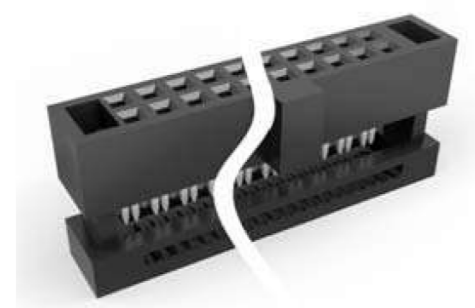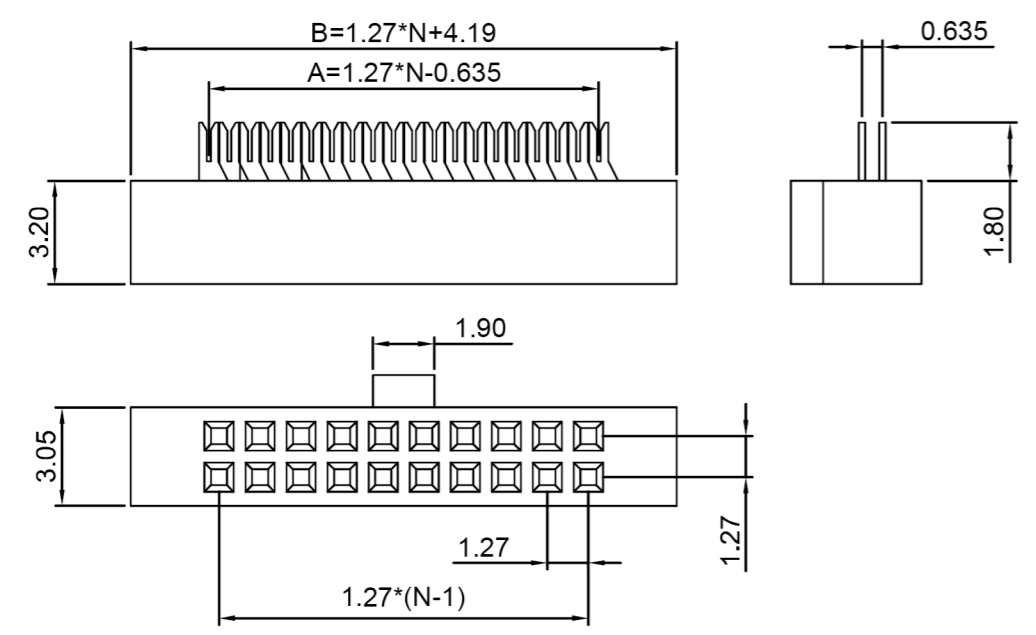

(Series Image-Reference Only)



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm WITH 0.635mm FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	V127 SERIES	
.XX	±0.25	.XX	±2°	Toby Electronics Ltd www.Toby.co.uk sales@toby.co.uk				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		V127-S-XX-R1-Series						