
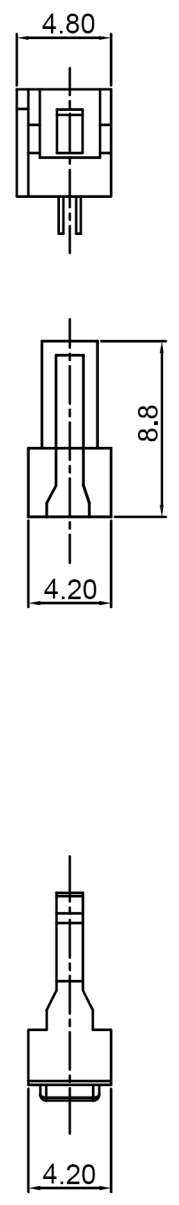


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	DRAWING UPDATE	YCH 07/27/11'		LJC 07/27/11'
C	ADD P/N CODE	JLZ 01/06/15'	HZW 01/06/15'	LJC 01/06/15'
D	DRAWING UPDATE	JLZ 08/28/18'		

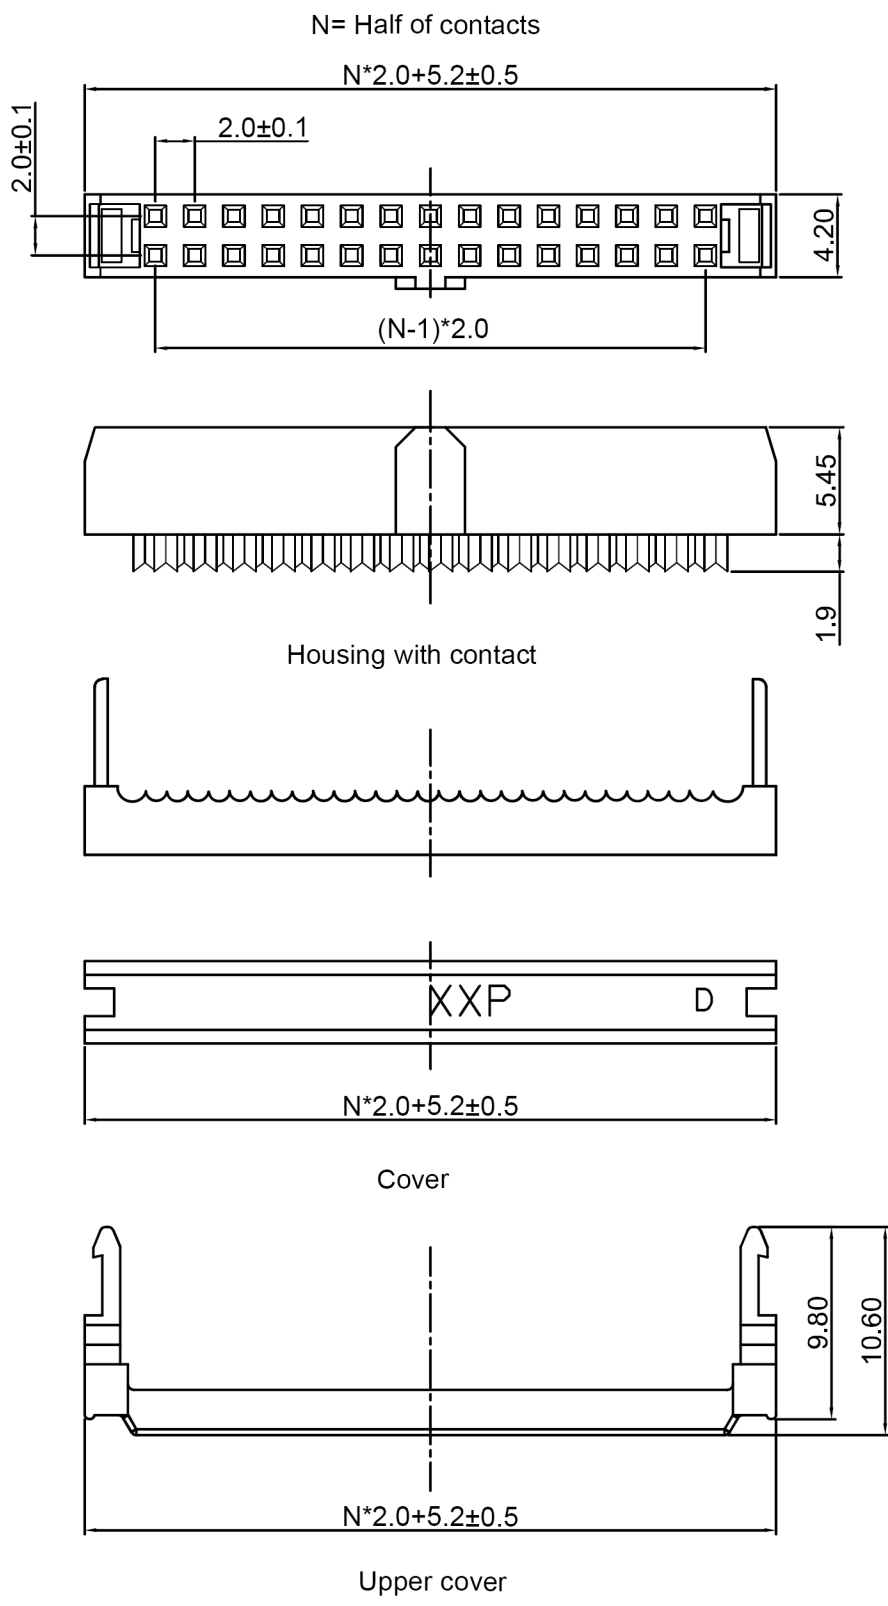

NOTES:

- Materials
 - 1.1 Insulator: Thermoplastic (UL 94V-0).
 - 1.2 Contact: Copper alloy.
- Specification
 - 2.1 Temperature range: -40~+105°C.
 - 2.2 Contact resistance: 20m Ωmax.
 - 2.3 Insulation resistance: 1000M Ωmin.
 - 2.4 Dielectric withstanding voltage: AC 500V per minute
- Part number code:

V 2 0 0 - S - XX - R 1

No. of contacts
10 12 16 20 22 24 26 30
34 36 40 44 50 56 68



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE
X.	±0.60	X.	±5°	UNITS	mm	SHEET SIZE	A4
.X	±0.38	.X	±3°	<p style="text-align: center;">Toby Electronics Ltd www.toby.co.uk sales@toby.co.uk</p>			
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		V 2 0 0 - S - XX - R 1					