

75 Ω HD-BNC™ TO 12 GHz



HD-BNC™ Cable Assemblies

RFA6T, RFB6T, RFB8T, RFC6T, RFC8T



SERIES	END 1 CONNECTOR	END 2 CONNECTOR	OVERALL LENGTH
RFC6T* = 12G-SDI, Belden 4694R Cable	-H4SP3 = 75 Ω High-Density BNC Straight Plug	-H4SP3 = 75 Ω High-Density BNC Straight Plug	-“XXXX” = Overall Length in millimeters -0300 (300 mm) 11.81" minimum
RFC8T* = 12G-SDI, Belden 4855R Cable			
RFA6T = RG 6 Cable			
RFB6T = Belden 1694A Cable			
RFB8T = Belden 1855A Cable			

ALSO AVAILABLE
75 Ω: DIN 1.0/2.3, BNC = RFB6T, RFA6T, RFC6T
75 Ω: DIN 1.0/2.3 = RFB8T, RFC8T

*Designed to meet SMPTE 2082 12G-SDI specifications.


HD-BNC™ Cable Connectors

HDBNC-CA




CONNECTORS FOR INDUSTRY STANDARD CABLES	
HDBNC-P-C-GN-ST-CA6	RG 6, Belden 1694A or Belden 4694R Cable
HDBNC-P-C-GN-ST-CA8	Belden 1855A or Belden 4855R Cable

P-C = Cable Plug
GN = Plating (10 μ" Gold on contact, Nickel on outer contact & shell)
ST = Straight

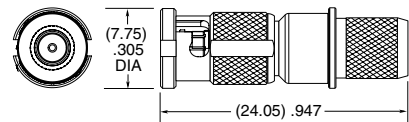

-CA6

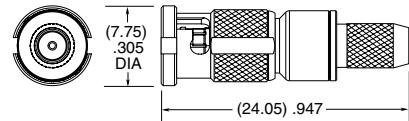

-CA8

Supplied with pins and ferrules.

Designed to meet SMPTE 2082 12G-SDI specifications.

HD-BNC™ Board Connectors

HDBNC-TH, HDBNC-EM, HDBNC-BH, HDBNC-BM

Cable Mates:
RFA6T, RFB6T, RFB8T, RFC6T, RFC8T



Notes:
Designed to meet SMPTE 2082 12G-SDI specifications.

Additional plating options available on Cable Assemblies, Cable Connectors and Board Connectors.

HDBNC	GENDER	TYPE	PLATING	ORIENTATION	TERMINATION
-------	--------	------	---------	-------------	-------------

-J
= Jack

-P
= PCB Mount

-GN
= 10 μ" (0.25 μm) Gold contact,
100 μ" (2.54 μm) Nickel shell

-ST
= Straight

-RA
= Right-angle

-BH1
= Through-hole


-BH2
= Through-hole (.236 mm) .093" PCB (-RA only)

-BM1D
= Die Cast Bulkhead Mixed Technology for (1.60 mm) .062" PCB (-RA only)


-BM2D
= Die Cast Bulkhead Mixed Technology for (3.18 mm) .125" PCB (-RA only)

-EM1
= Edge Mount (-ST only)


-TH1
= Through-hole (-ST only), Three Legs




-RA-BH2




-ST-EM1



-RA-BM1D & -BM2D (BALANCED FOR PICK-AND-PLACE)



-ST-BH1



-ST-TH1