
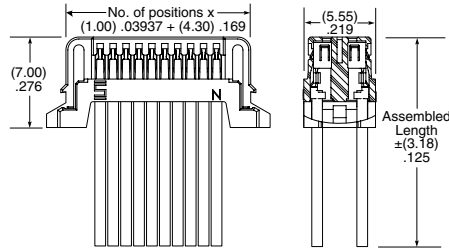


(1.00 mm) .0394" PITCH • DOUBLE ROW DISCRETE WIRE SOCKET

SERIES	PINS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLED LENGTH	WIRING OPTION
S1SD = Double Row PVC Cable	-02, -03 -04, -05, -10, -15, -20 (Standard sizes)	-28 = 28 AWG	-GF = 3 μ" (0.07 μm) Gold on contact and tail	-"XX.XX" = Assembled Length in Inches (45.72 mm) 01.80" min.	Double Ended Assemblies -L1 = Pin 1 to Pin 1 -L2 = Pin 1 to Pin 2 -L3 = Pin 1 to Pin N -L4 = Pin 1 to Pin N-1 Single Ended Assembly -L = Latching
S1SDT = Double Row Blue *Teflon® Cable		-30 = 30 AWG			

MICROMATE™

S1SD(T)
Board Mates:
T1M
Cable Mates:
T1SD(T), T1PD(T)




SPECIFICATIONS


Insulator Material: Natural Nylon
Contact Material: Phosphor Bronze
Plating: Au over 50 μ" (1.27 μm) Ni
Operating Temp Range (S1SD(T)/T1M): -10 °C to +85 °C (PVC) -40 °C to +125 °C (Teflon®)
Current Rating (28 AWG): 2.3 A per pin (2 pins powered)
Voltage Rating: 250 VAC/353 VDC
Wire: 28 or 30 AWG


*DuPont™ Teflon® is a registered trademark of the E.I. du Pont de Nemours and Company or its affiliates.


Note: Teflon® cable is intended for crimp only. Contact Samtec for solderable cable applications.

SERIES	NO. OF POSITIONS	SERIES	01	PLATING
ISD1 = Double Row Body	-02, -03, -05, -07, -10, -15, -20 (Per Row)	CC09R = Contact, Full Reel (30,000 Parts per Reel)		-GF = 3 μ" (0.07 μm) Gold contact and tail
		CC09M = Contact, Mini Reel (5,000 Parts per Reel)		









TOOLING

Hand Tool: CAT-HT-309-2830-12	Mini Applicator: CAT-MC-309-2830-XX-01
Clamp for mounting hand tool: CAT-HT-MNT-01	

Note: Some lengths, styles and options are non-standard, non-returnable.