
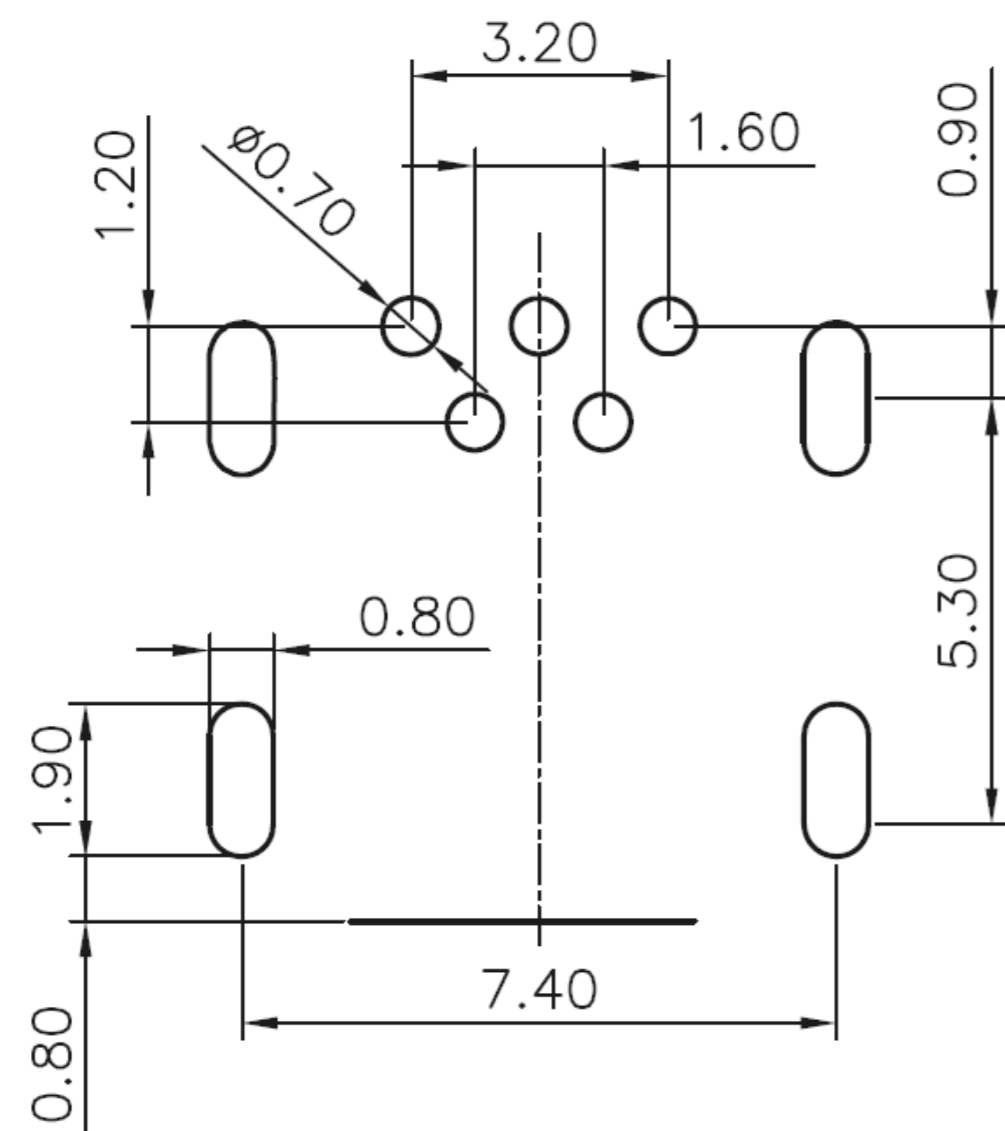
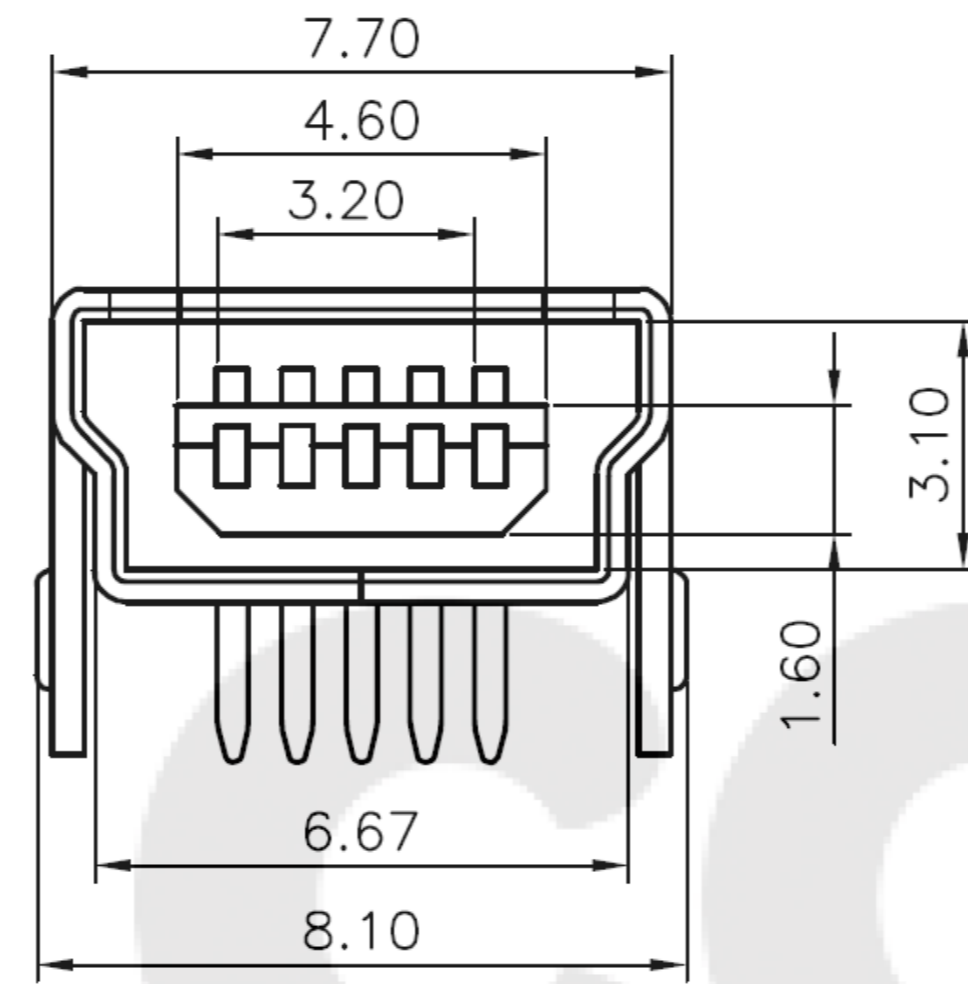
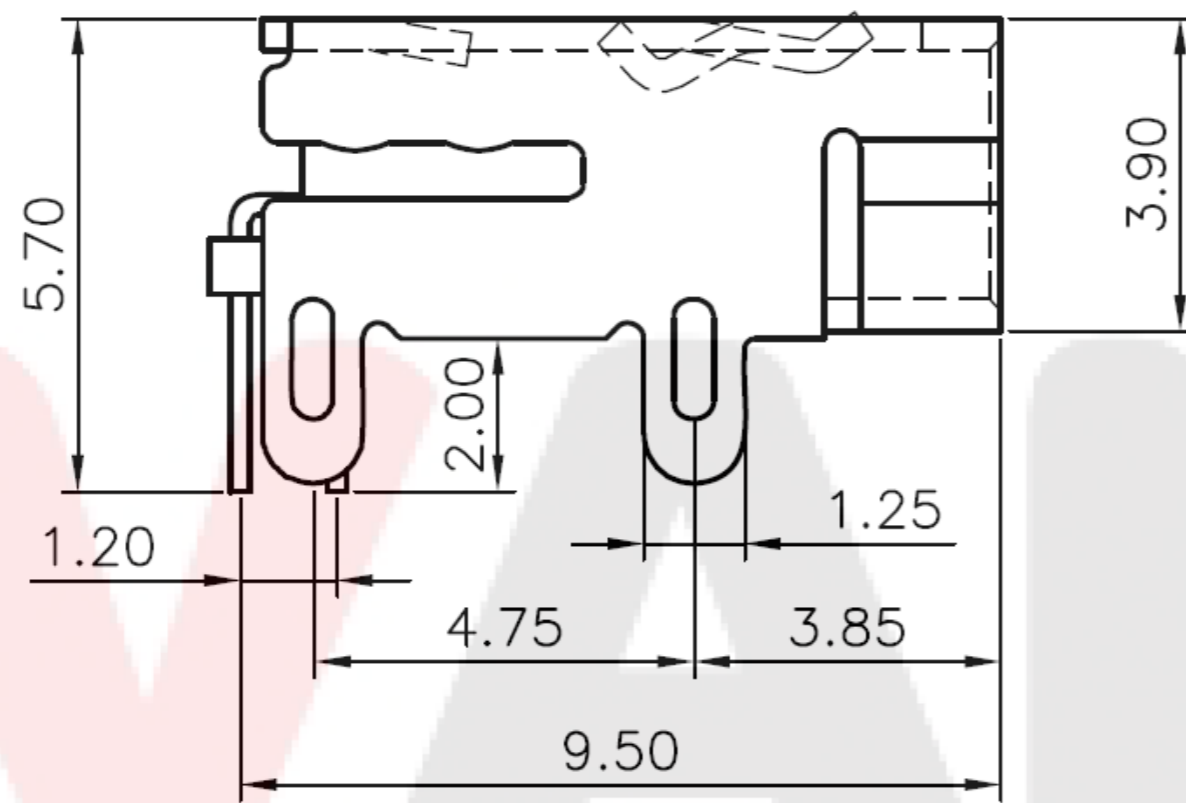
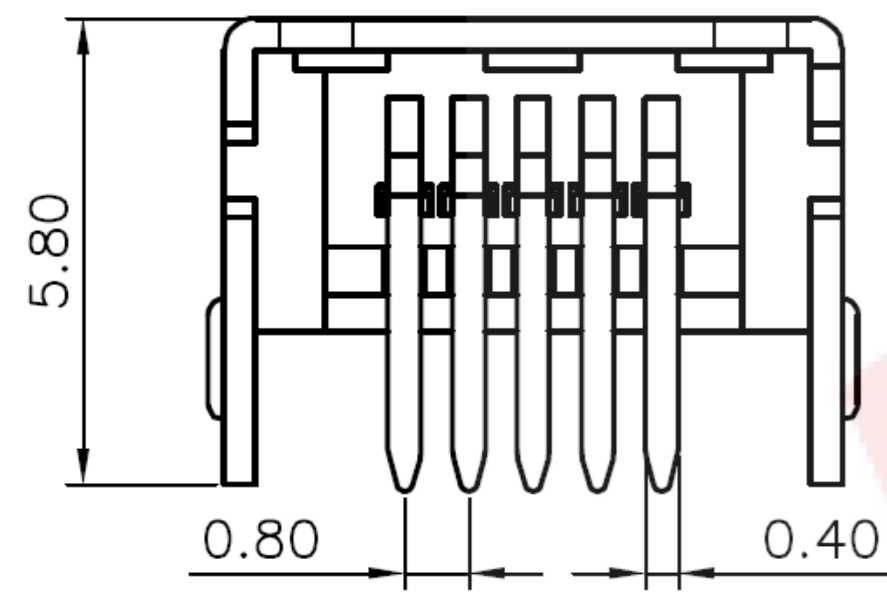


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/01/11'		

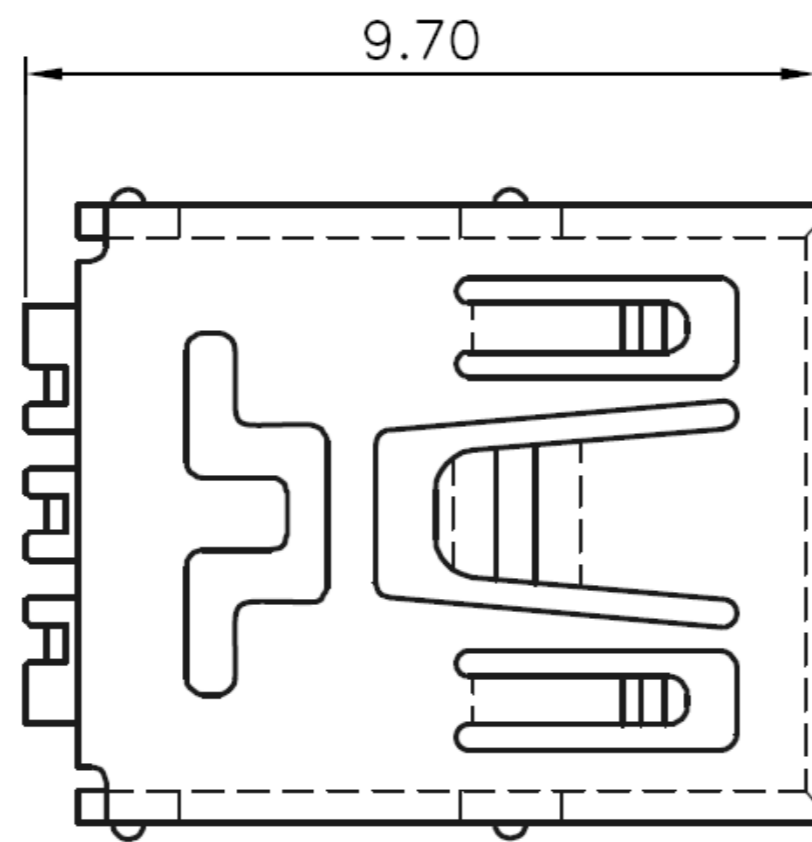

Recommend PCB Layout
Tolerance=±0.03

NOTES:

1.SPECIFICATIONS

- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min.
- .TEMPERATURE RANGE: -40°C--+105°C

2.MATERIALS

- .HOUSING: High temperature plastic,UL94 V-0,Color of black.
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.
- Shell plating Full Nickel
- Contact plating Selective gold flash
- Mylar Support W/O Mylar
- Color of housing BLACK

3.PRODUCT NUMBER CODE:

MUSB-B-TB-G-R1

QUALITY VALUE COMPONENTS

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	MINI USB 5 Positions FEMALE R/A TYPE	
X.	±0.60	X.	±5°		mm		
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE		SERIES	
SCALE		1:1		A4		MUSB SERIES	
DRAWING NO.		SHEET 1 OF 1		Toby Electronics Ltd W:www.toby.co.uk E: sales@toby.co.uk T: +44 (0)1295271777			