


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

Single Row
N: Number Of Contacts

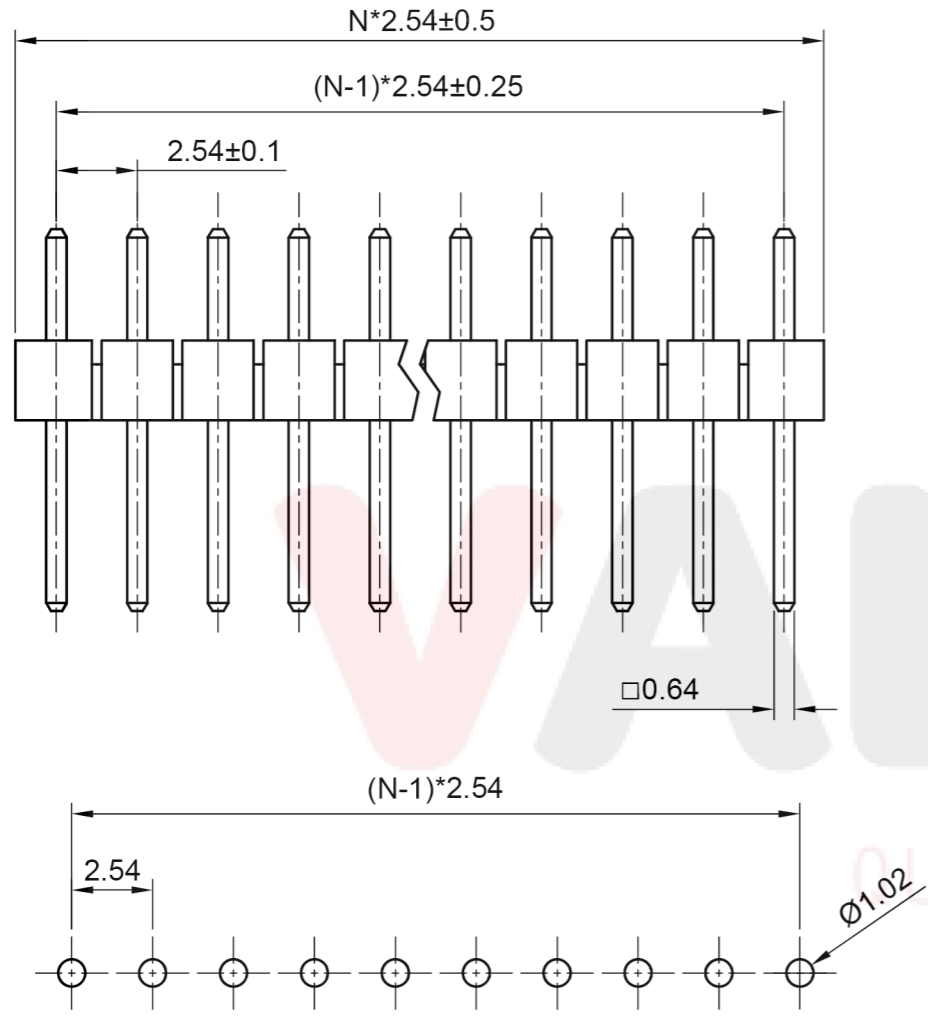

Recommend PCB Layout

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
O	DRAWING UPDATE	JLZ 09/18/18'		
P	DRAWING UPDATE	JLZ 06/08/21'		

- Notes:
- Electrical Characteristics:
 - Contact Resistance: 20mΩ Max.
 - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
 - Insulation Resistance: 1000MΩ Min.
 - Current Rating: 3A.
 - Voltage Rating: 250V AC rms.
 - Environment Characteristics:
 - Temperature: -40°C ~ +105°C.
 - Materials:
 - Contact Material: Copper Alloy.
 - Contact Plating: Full Gold Flash, Gold Plating Over Nickel.
 - Insulator Materials: PA-9T, Black, UL94-V0.
 - Product Number Code:

HTHS-xx-9T
 Number of Positions/Contacts
 01 ~ 40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.54mm Pitch High-Temp Single Row Header PA-9T Insulator Material	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	HTHS SERIES
.XX	±0.25	.XX	±2°	Toby Electronics Ltd www.toby.co.uk sales@toby.co.uk			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		HTHS-xx-9T					