


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

Double Row  
N: Number Of Contacts/2

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
O	DRAWING UPDATE	JLZ 09/18/18'		
P	DRAWING UPDATE	JLZ 06/08/21'		

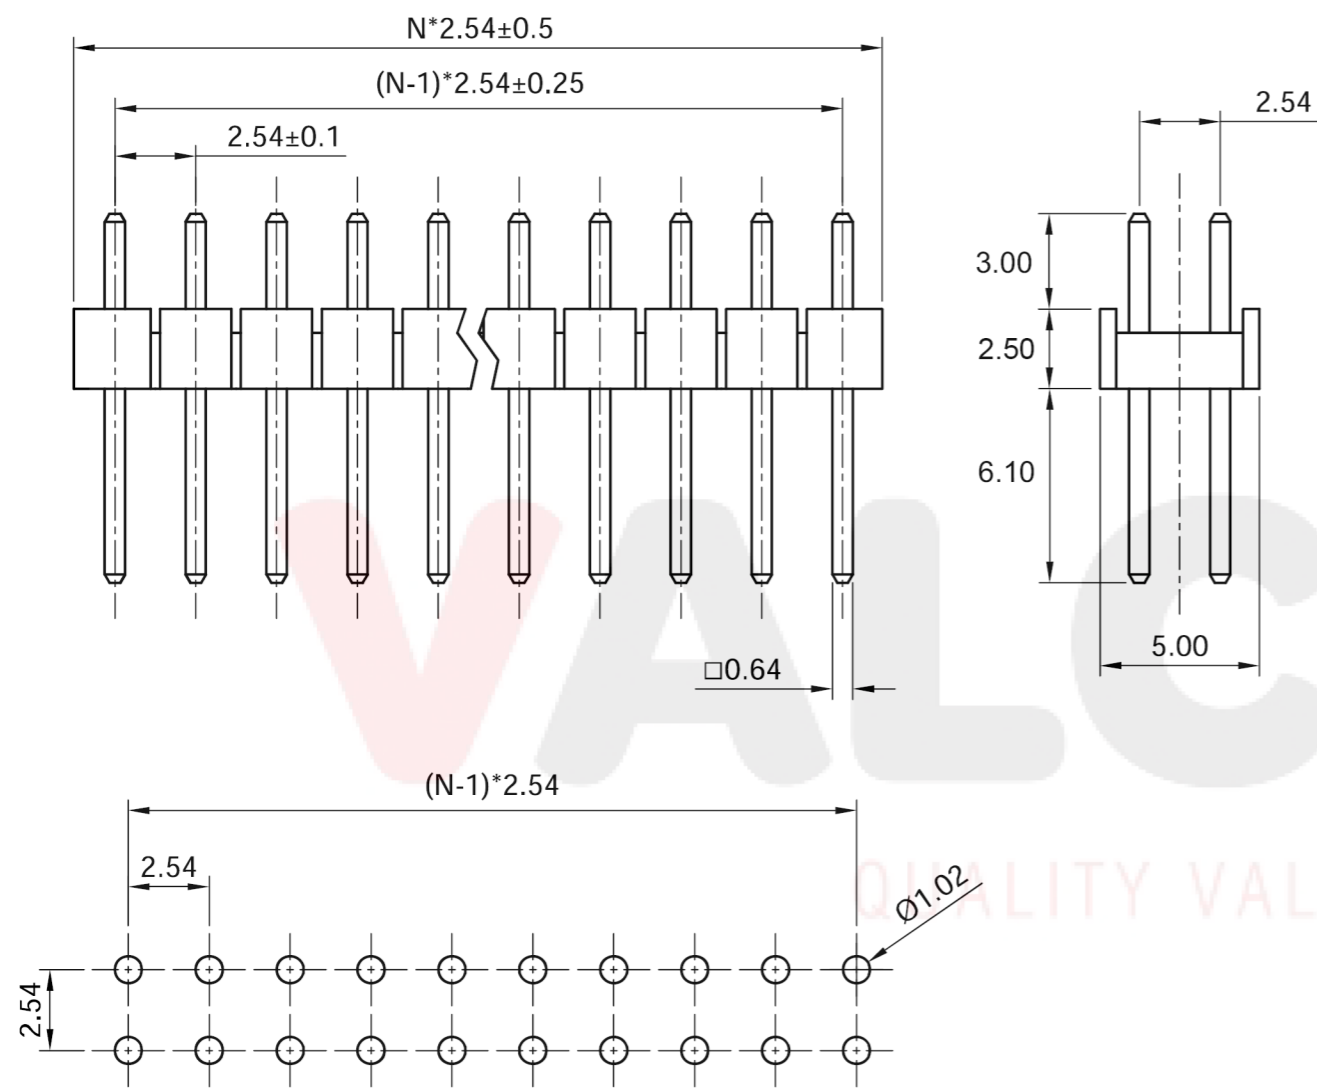

- Notes:
- Electrical Characteristics:
    - Contact Resistance: 20mΩ Max.
    - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
    - Insulation Resistance: 1000MΩ Min.
    - Current Rating: 3A.
    - Voltage Rating: 250V AC rms.
  - Environment Characteristics:
    - Temperature: -40°C~+105°C.
  - Materials:
    - Contact Material: Copper Alloy.
    - Contact Plating: Full Gold Flash, Gold Plating Over Nickel.
    - Insulator Materials: PA-9T, Black, UL94-V0.
  - Product Number Code:  
HTHD-xx-9T  
Number of Positions/Contacts Per Row  
01 ~ 40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Pitch High-Temp Dual Row Header	
X.	±0.60	X.	±5°	UNITS	mm	PA-9T Insulator Material		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	HTHD SERIES	
.XX	±0.25	.XX	±2°	<b>Toby Electronics Ltd</b> <a href="http://www.toby.co.uk">www.toby.co.uk</a>   <a href="mailto:sales@toby.co.uk">sales@toby.co.uk</a>				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		HTHD-xx-9T						