

# LHT DUAL ROW PIN HEADER H: 7.2mm R/A



**PITCH: 2.54mm \* 2.54mm**

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

### Electrical




Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.



Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

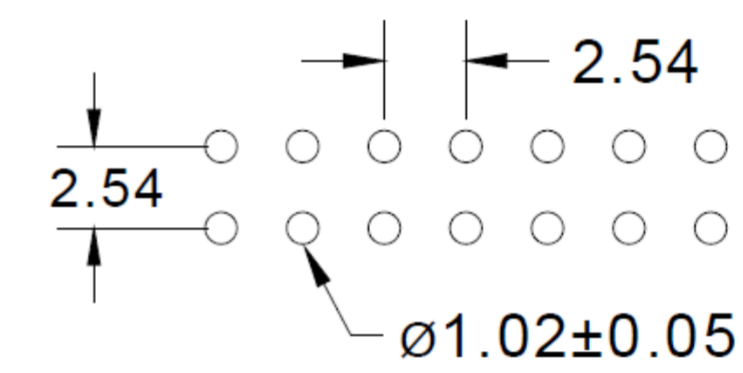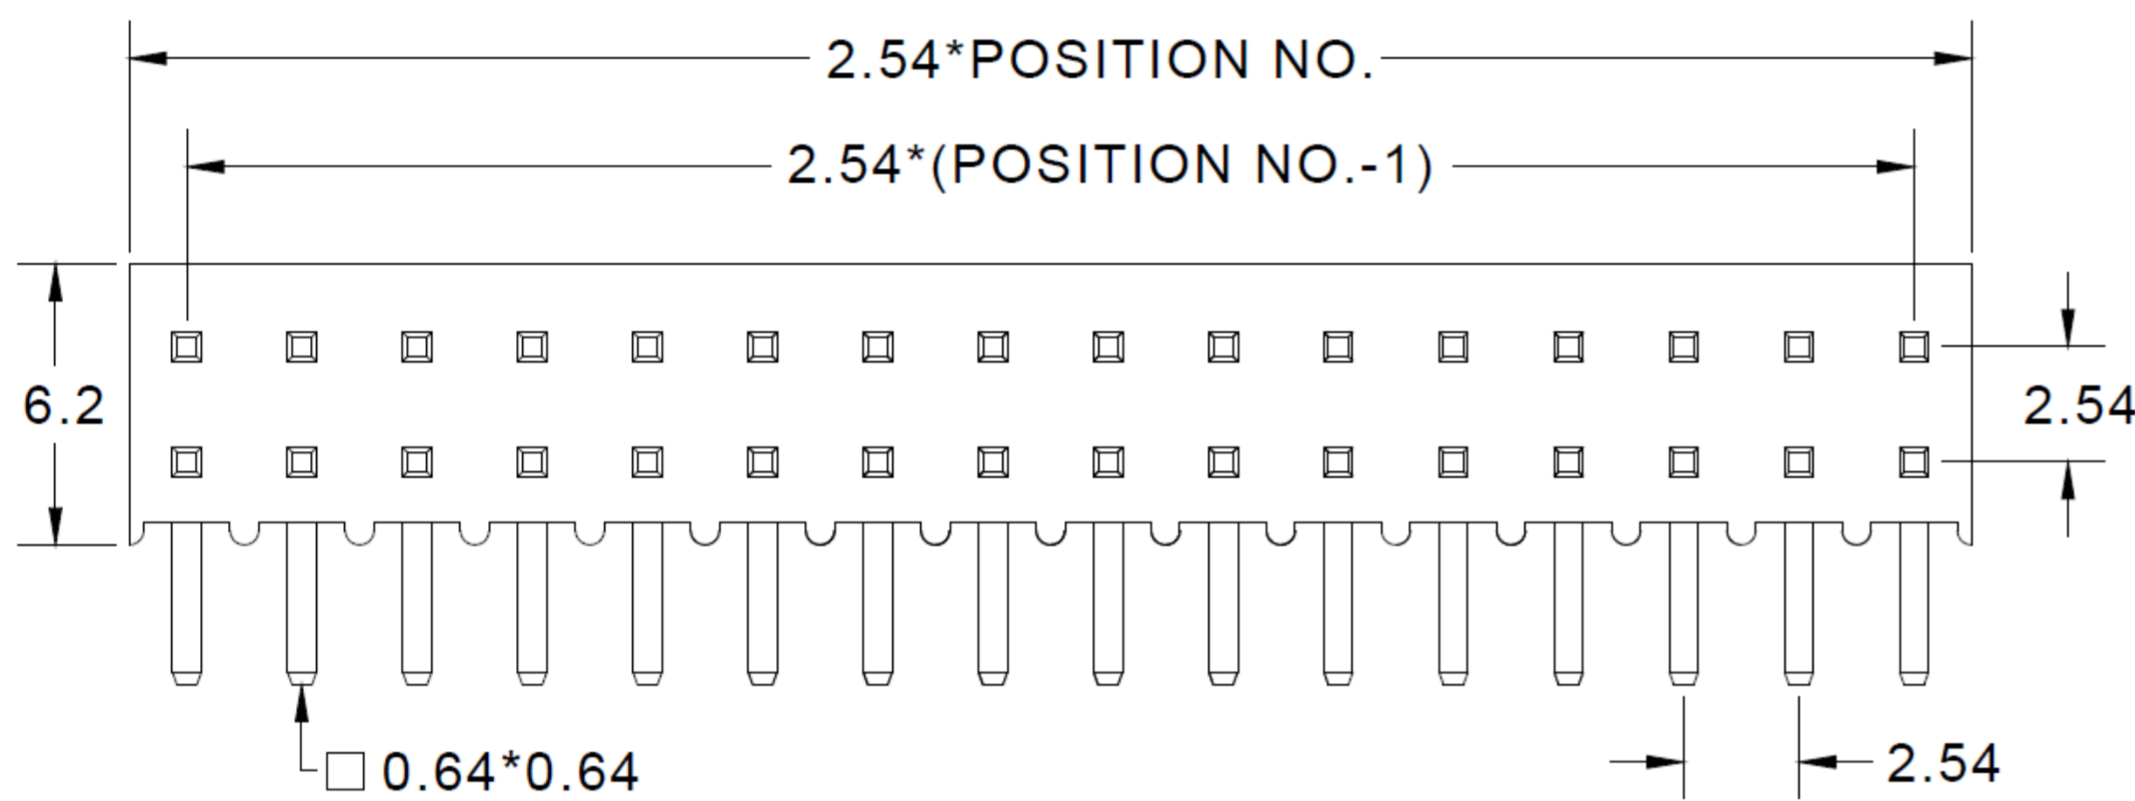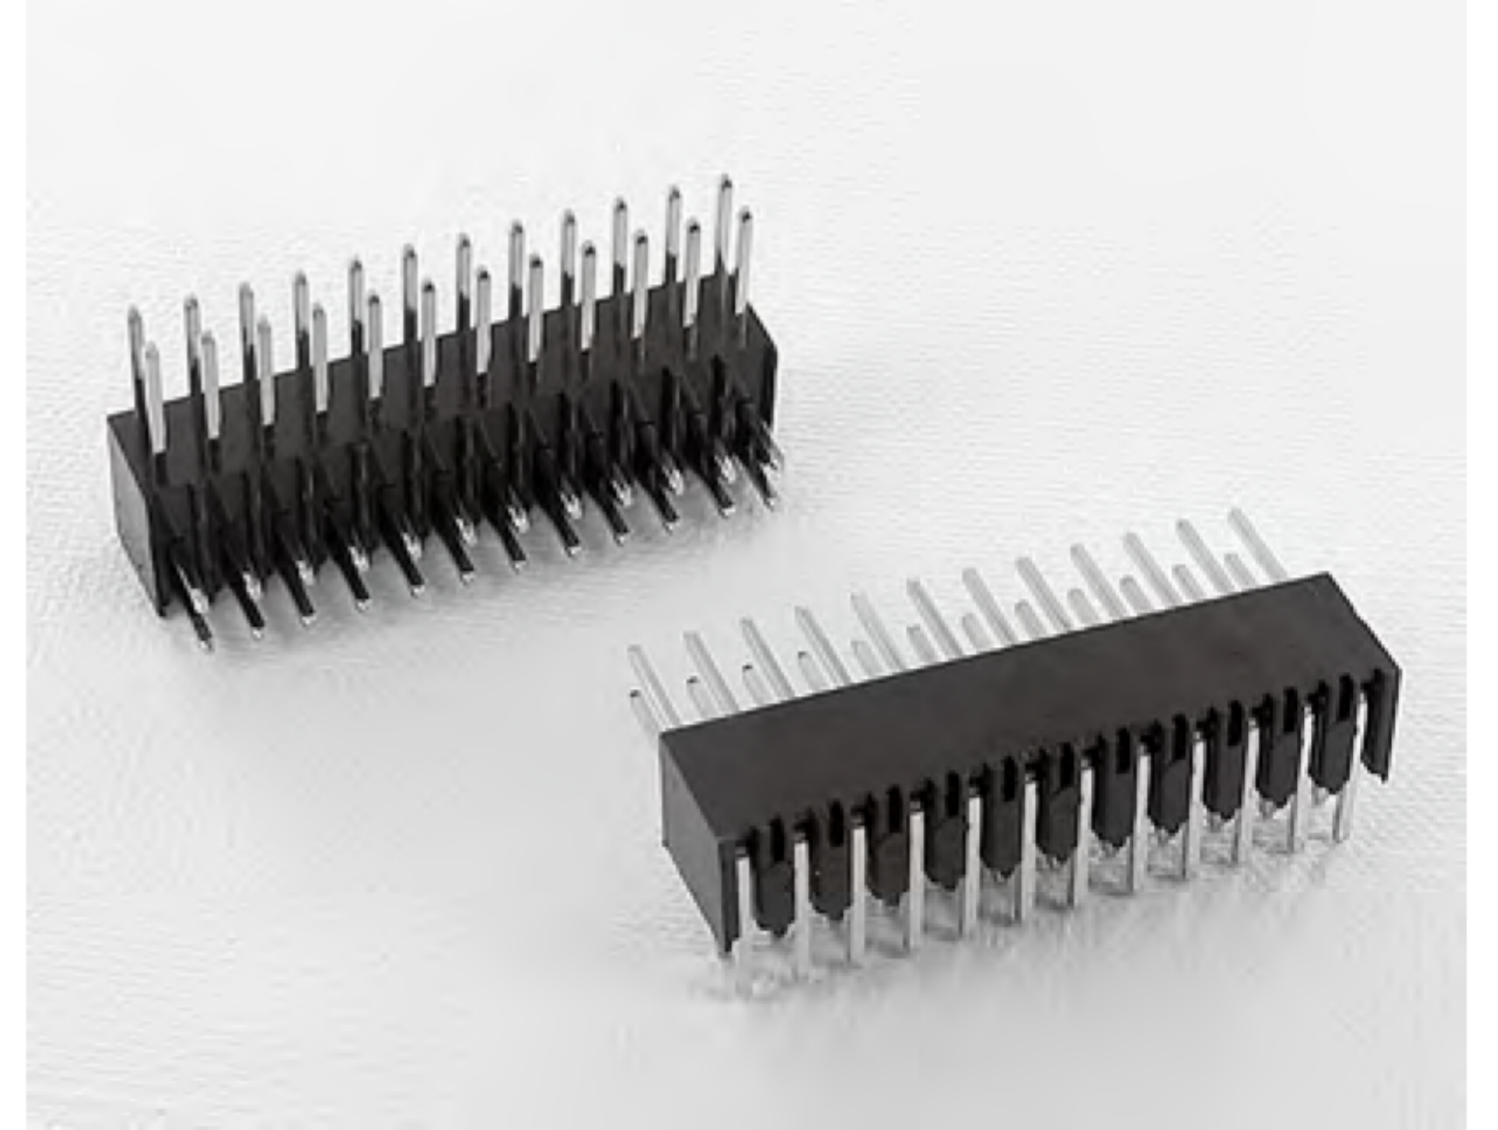

RECOMMENDED P.C.B LAYOUT

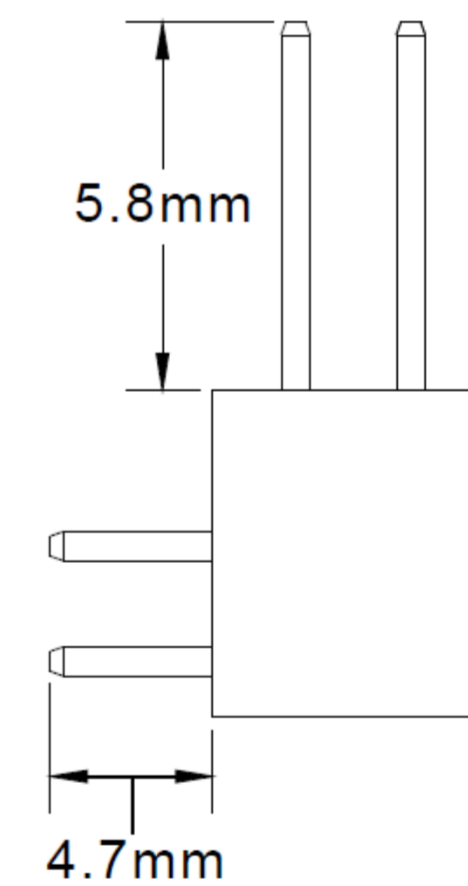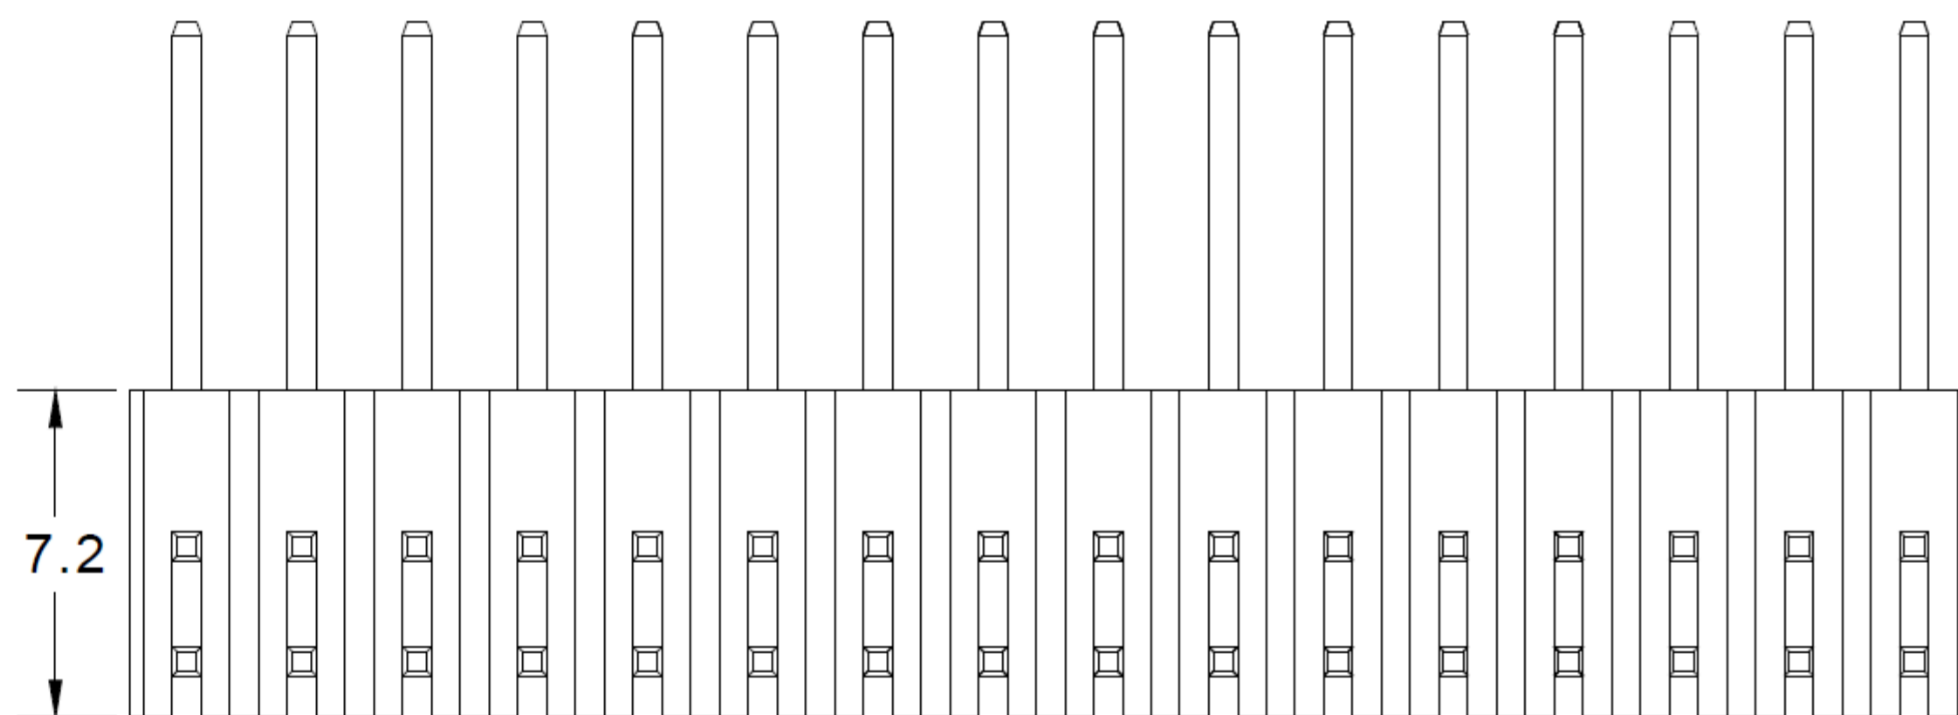

**How to order:** LHT - 1 - 2 - 3 - 4 - 5

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	5. PIN LENGTH
04 TO 80	R: Right Angle (90 deg.)	G: GOLD FLASH	058 / 047

