

C101 LOW PROFILE SHRUNK IDC SOCKET



PITCH: 2.54mm * 2.54mm

SPECIFICATIONS

Material

Insulator : Black PBT, Glass Reinforced, UL 94V-0

Contact : Phosphor Bronze, Selective Gold

Electrical

Current Rating : 1 Amp



Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.




Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

► Terminated with L01-1.27mm pitch flat ribbon cable

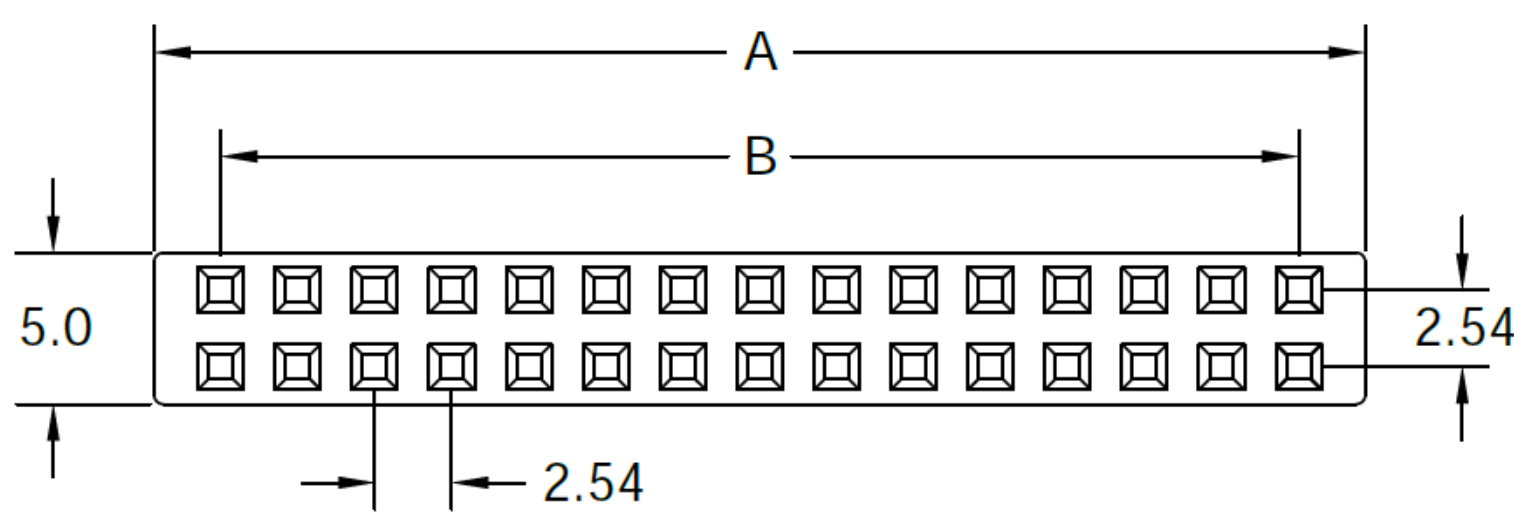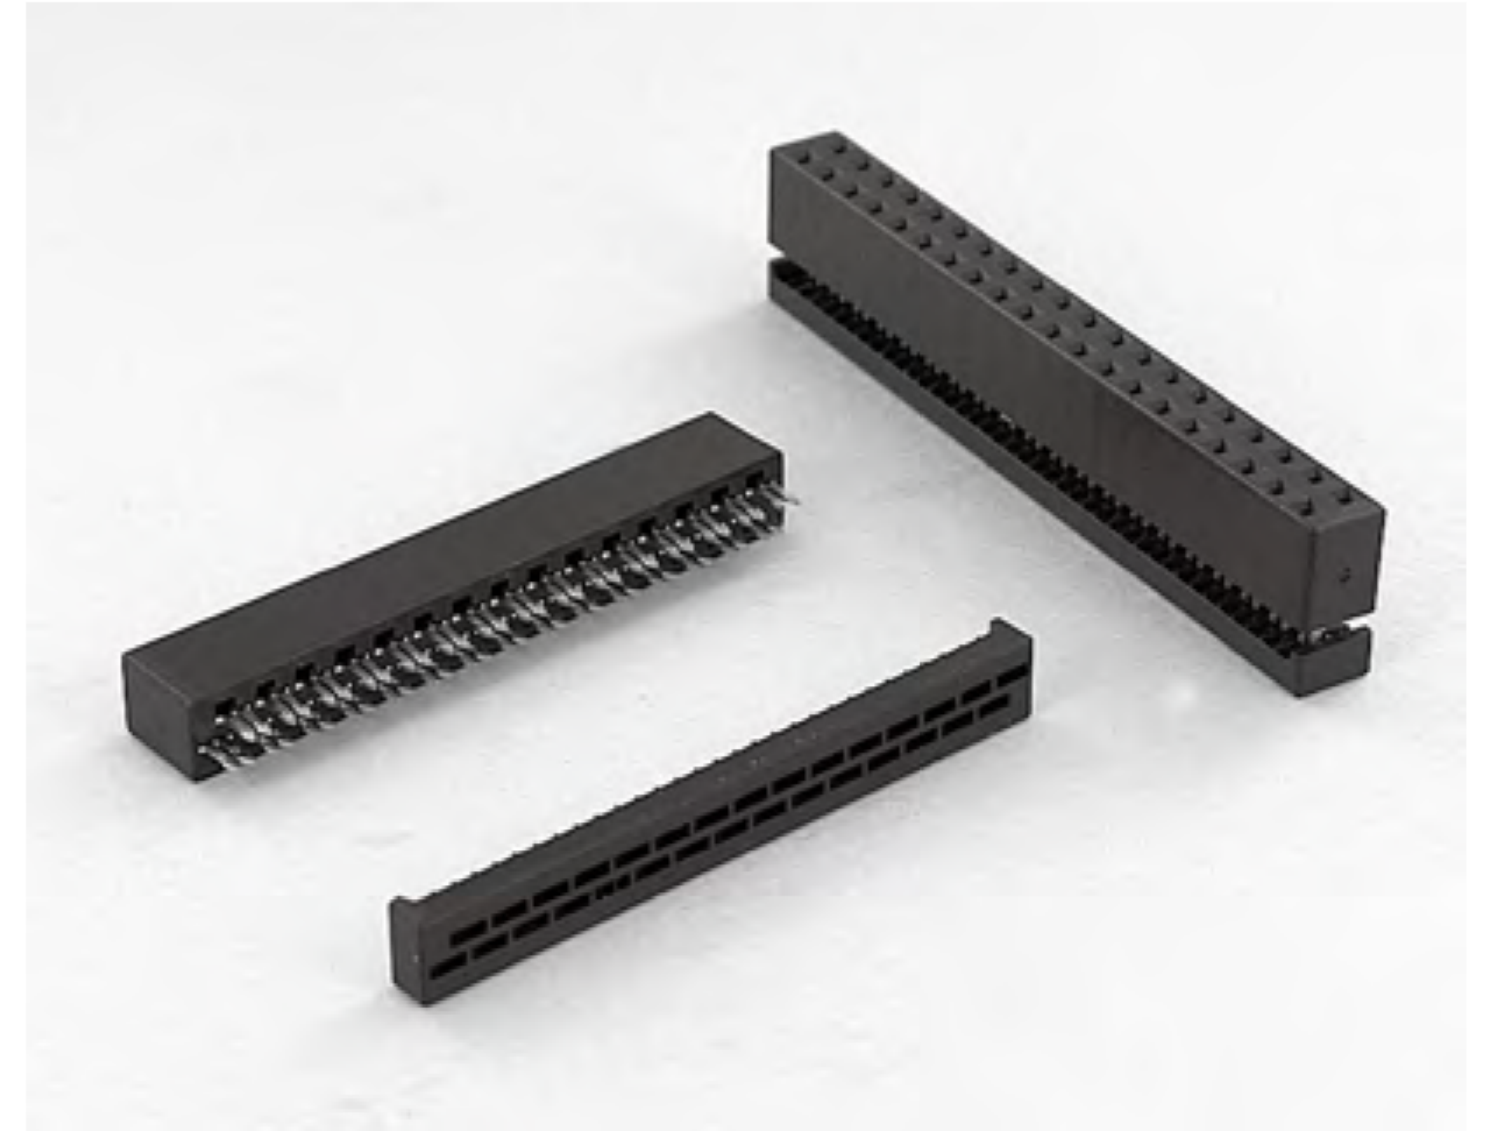

POSITION	A	B
6	9.48	5.08
8	12.02	7.62
10	14.56	10.16
12	17.10	12.70
14	19.64	15.24
16	22.18	17.78
18	24.72	20.32
20	27.26	22.86
24	32.34	27.94
26	34.88	30.48
30	39.96	35.56
34	45.04	40.64
40	52.66	48.26
50	65.36	60.96
60	78.06	73.66
64	83.14	78.74

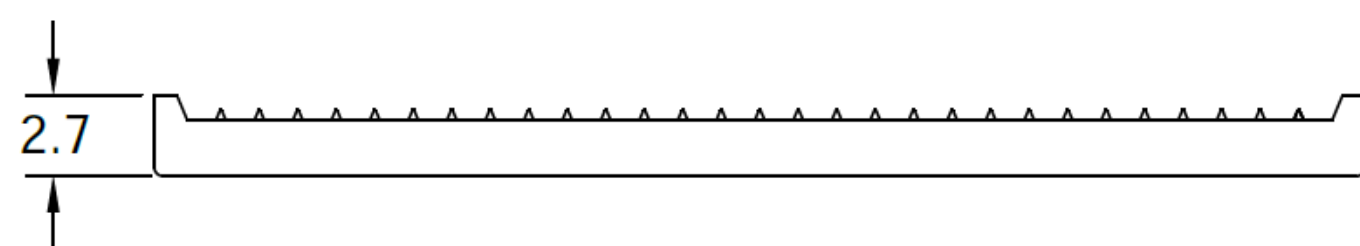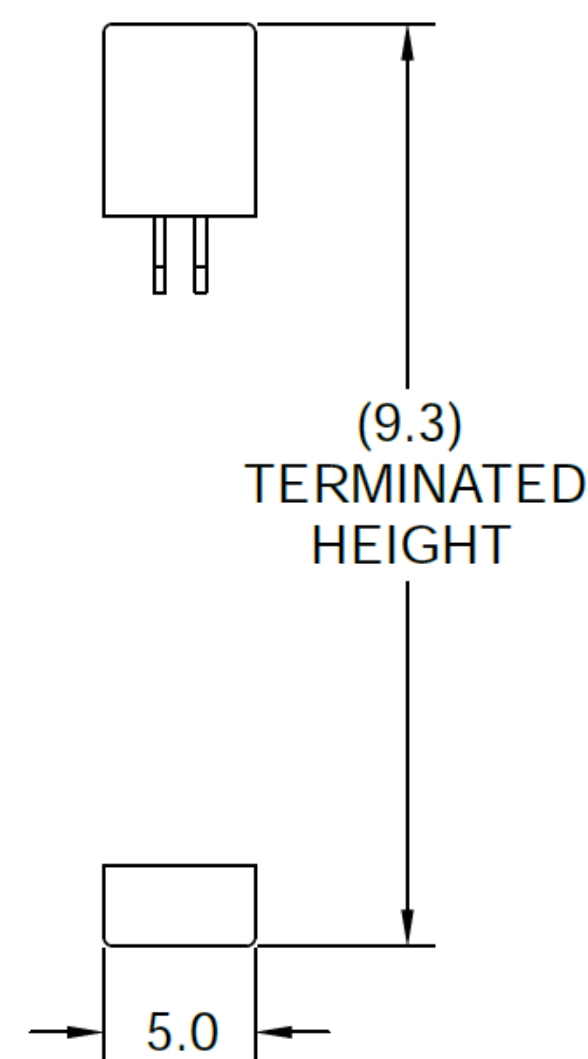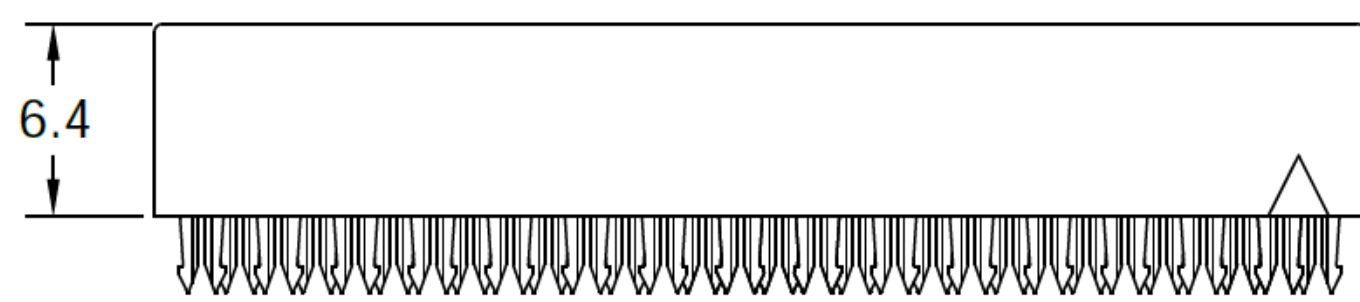

How to order: C101-W-xx-R1

XX = NO. OF CONTACT

06 08 10 12 14 16
18 20 24 26 30 34
40 50 60 64

Non-Standard sizes have 10k pcs
MOQ



THE VITAL COMPONENT