

1.85 mm TO 65 GHz

1.85 mm Cable Assemblies RF047-A, RF086



VSWR

RF047-A: 1.40 max.
RF086: 1.40 max.

SERIES	END 1 CONNECTOR	END 2 CONNECTOR	OVERALL LENGTH
RF047-A = (1.2 mm) .047" overshield DIA 29 AWG millimeter wave cable RF086 = (2.18 mm) .086" overshield DIA 23 AWG millimeter wave cable	-18SJ = 1.85 mm Straight Jack -18SP = 1.85 mm Straight Plug		-“XXXX” = Overall Length in millimeters -0100 (0100 mm) 3.94" minimum
ALSO AVAILABLE			
2.40 mm, SMPM, 2.92 mm = RF086			
1.35 mm, 2.40 mm, SMPM, 2.92 mm = RF047-A			


1.85 mm Cable Connectors PRF18



CONNECTORS FOR INDUSTRY STANDARD CABLES	
PRF18-J-C-EP-047D-SS	.047, semi-rigid
PRF18-P-C-EP-047D-SS	.047, semi-rigid
PRF18-J-C-EP-086-SS	.086 Temp-Flex, low loss flexible
PRF18-P-C-EP-086-SS	.086 Temp-Flex, low loss flexible
PRF18-J-C-EE-405-SD	RG 405, .085, semi-rigid
PRF18-J-C-EP-085-BS	Harbour SS405, flexible alternative to RG 405
PRF18-P-C-EE-085-SD	Harbour SS405, flexible alternative to RG 405
PRF18-P-C-EP-085-SS	Harbour SS405, flexible alternative to RG 405
PRF18-P-C-EP-047A-SS	.047 Temp-Flex, low loss flexible, 29 AWG
PRF18-J-C-EP-047A-SS	.047 Temp-Flex, low loss flexible, 29 AWG

P-C = Cable Plug
 J-C = Cable Jack
 EE = Plating (50 μ" gold center contact, & outer contact)
 EP = Plating (50 μ" gold center contact, passivated outer contact)
 SS = Straight, Solder Clamp
 SD = Straight, Direct Solder
 BS = Bulkhead, Solder Clamp

INTERFACE STANDARD

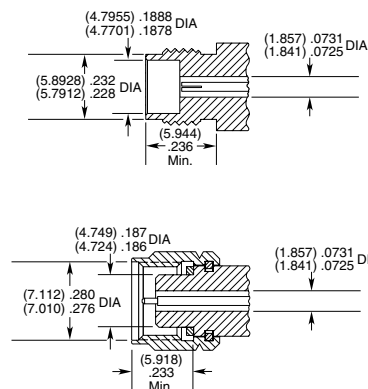

1.85 mm Board Connectors 185

Cable Mates:
RF047-A, RF086



185	GENDER	TYPE	PLATING	ORIENTATION	TERMINATION	OPTION
	-J = Jack	-P = PCB Mount	-EP = 50 μ" (1.27 μm) Gold center contact, Passivated outer contact	-ST = Straight	-CM = Compression Mount Stripline -CMM = Compression Mount Microstrip	-1 = Without Screws -2 = With Screws

