


# THROUGH-HOLE MICRO HEADER

(1.27 mm) .050" PITCH • FTSH SERIES

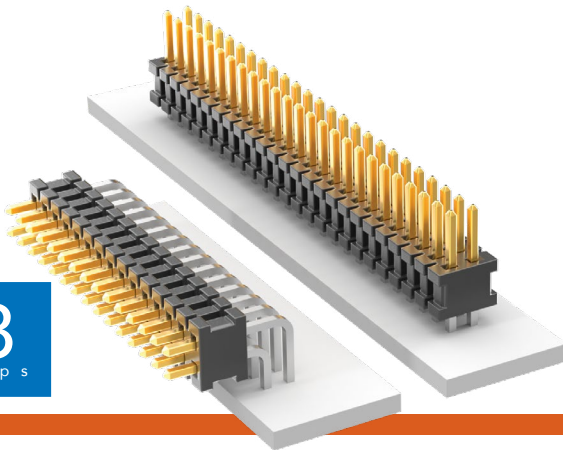

## FTSH

**Board Mates:**

CLP, FLE

**Cable Mates:**

FFSD, FFTP

## SPECIFICATIONS

**Insulator Material:**

Black Liquid Crystal Polymer

**Terminal Material:**

Phosphor Bronze

**Plating:**

Sn or Au over 50  $\mu$ " (1.27  $\mu$ m) Ni

**Current Rating (FTSH/CLP):**

3.4 A per pin  
(2 pins powered)

**Operating Temp Range:**

-55 °C to +125 °C


## PROCESSING

**Lead-Free Solderable:**

Yes

## LOCKING CLIP

For single mating cycle with the FFSD. Specify -LC after tail option. Lead Style -01 and 10 pins/row minimum. 5-9 pins/row not available in combination with keying shroud (-K).



## ALSO AVAILABLE

MOQ Required

Molded Pick & Place pads

Other platings



## Notes:

Some sizes, styles and options are non-standard, non-returnable.

See SFM/TFM for positive alignment feature.

FTSH	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	OPTION	TAIL OPTION	OTHER OPTIONS
------	---	------------------	------------	----------------	---	--------	-------------	---------------

02  
thru  
50

Specify  
LEAD  
STYLE  
from  
chart

**-F**  
= Gold flash  
on post,  
Matte Tin  
on tail

**-L**  
= 10  $\mu$ "  
(0.25  $\mu$ m)  
Gold on  
post,  
Matte Tin  
on tail

Leave blank for  
Right-angle

**-"XXX"**  
= Polarized  
Position  
(Specify  
position  
of omitted pin)  
(Not available  
with -EX  
options)

Leave  
blank for  
straight  
tail

**-RA**  
= Right-  
angle


**-ES**  
= End Shroud  
(Style -02 & -03)  
9 pins/row  
minimum

**-EP**  
= End Shroud  
with Guide Post  
(Style -02 & -03)  
9 pins/row  
minimum


**-EL**  
= End Shroud  
with Board Lock  
(Style -02 & -03)  
9 pins/row  
minimum

**-EJ**  
= Ejector Shroud  
(Style -01 only)  
10 pins/row  
minimum  
25 pins/row  
maximum -RA  
not available

**-K**  
= Keying Shroud  
for mating  
with FFSD  
(Style -01 only,  
05, 08, 10, 13,  
15, 17, 20 & 25  
pins/row only  
and 13, 17,  
20 & 25 only  
with -EJ option)

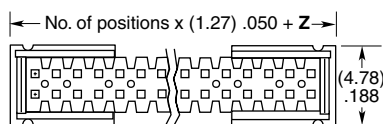

**-EX OPTION SHOWN**

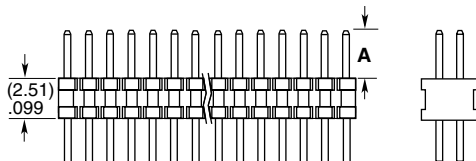

OPTION	Z
-ES	(1.55) .061
-EJ	(15.77) .621
-EP	(5.87) .231
-EL	((6.53) .257

LEAD STYLE	A	MATES WITH
-01	(3.05) .120	FFSD
-02	(1.91) .075	FLE
-03	(1.65) .065	CLP-D
-04	(3.81) .150	N/A

