


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

MOUNTING HOLE:  $\phi 3.2\text{mm}$   
 THICKNESS: 1.6mm  
 (RECOMMEND FOR REFERENCE ONLY)

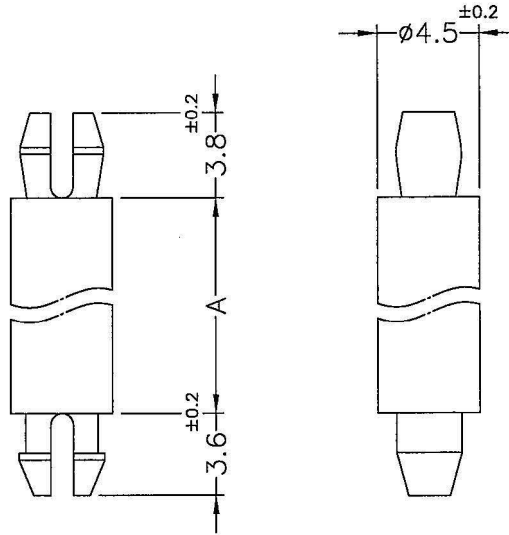

MOUNTING HOLE:  $\phi 3.2\text{mm}$   
 THICKNESS: 1.6mm  
 (RECOMMEND FOR REFERENCE ONLY)

PART NO.	A
MSP3-3	3.2
MSP3-4	4.0
MSP3-5	4.8
MSP3-5.8	5.8
MSP3-6	6.4
MSP3-8	7.9
MSP3-8.5	8.5
MSP3-9.5	9.5

PART NO.	A
MSP3-10	10.0
MSP3-11	11.1
MSP3-12S	12.0
MSP3-12	12.7
MSP3-14	14.3
MSP3-15.9	15.9
MSP3-17	17.5
MSP3-19	19.1
MSP3-20	20.6

PART NO.	A
MSP3-21	21.0
MSP3-22	22.2
MSP3-25	25.4
MSP3-27	27.0
MSP3-28	28.5
MSP3-29.2	29.2
MSP3-31.7	31.7
MSP3-34	34.9
MSP3-38	38.1

NOTE: 1. SHRINKING IS NORMAL STATUS.  
 2. MADE OF EQUIVALENT MATERIAL.



VALCON  
 株式会社 伯都電子

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TOBY ELECTRONICS MANUFACTURING PARTNER. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TOBY ELECTRONICS MANUFACTURING PARTNER IS STRICTLY PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.	PART NO.	
	2005.11.22	SPACER SUPPORT	MSP3-	SEE ABOVE	
	DRAWN <i>Syman</i>	MATERIAL NYLON 66 UL94V-2	SIZE A4	SPEC. DWG.	REV E
	CHECKED <b>Yuping</b>	COLOR NATURAL	FINISH	SCALE: 3:1	UNIT mm
APPROVED <i>Kang</i>	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE		SHEET 1 OF 1		