


15

KLS 3

## Jack connectors



Jack plug acc. to JIS C 6560 JC63P3, 6.35 mm, 3 poles/  
stereo, straight version, with bend protection and solder  
terminals

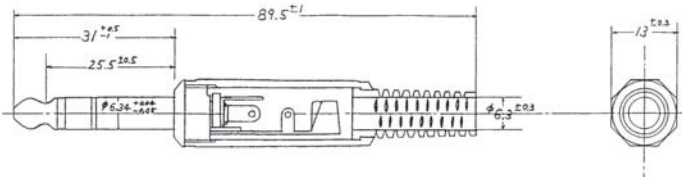

#### Environmental conditions

Temperature range -20 °C/+70 °C

#### Materials

Insulating body	ABS
Contact	CuZn, nickel-plated
Lötkontakt	steel, nickel-plated
Insulation	ABS
Housing	PP
Bend protection sleeve	PVC

#### Connectable conductors for solder area

Cable diameter 6,3 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Rated current	2 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 50 MΩ

#### Associated products

Counterparts

☞ 1505 01	☞ KLB 3	☞ KLBP 3
☞ KLBPS 3	☞ KLK 3	

15

KLS 3

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
KLS 3	3	50	500

**Packaging:**

in bulk, in a cardboard box or a plastic bag